



Varistor-suppressor f. DILM17..32

Part no.


DILM32-XSPV48

Article no.

281212




Delivery programme

Product range			Accessories
Accessories			Suppressor circuit
Type			Varistor suppressor
Voltage	U _s	V	24 - 48 AC
For use with			DILM17 - DILM32 DILK12 - DILK25 DILL... DILMP32 - DILMP45
Contact sequence			
Instructions			For AC operation contactors 50 - 60 Hz. With DC operated contactors and with DILM115 and DILM150 the suppressor is integrated. Note drop-out delay

Approbationen

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Specially designed for NA

IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
E29184
NKCR2
227038
3211-07
UL Recognized, CSA certified
No



Technische Daten nach ETIM 4.0


Function			Varistor
Rated control voltage U _s at AC 50 Hz		V	48
Rated control voltage U _s at AC 60 Hz		V	48
Rated control voltage U _s at DC		V	0
With LED display			No
Voltage type for actuation			AC

CAD-Daten

Product standards CAD data:

<http://eaton-moeller.partcommunity.com>

Dimensions

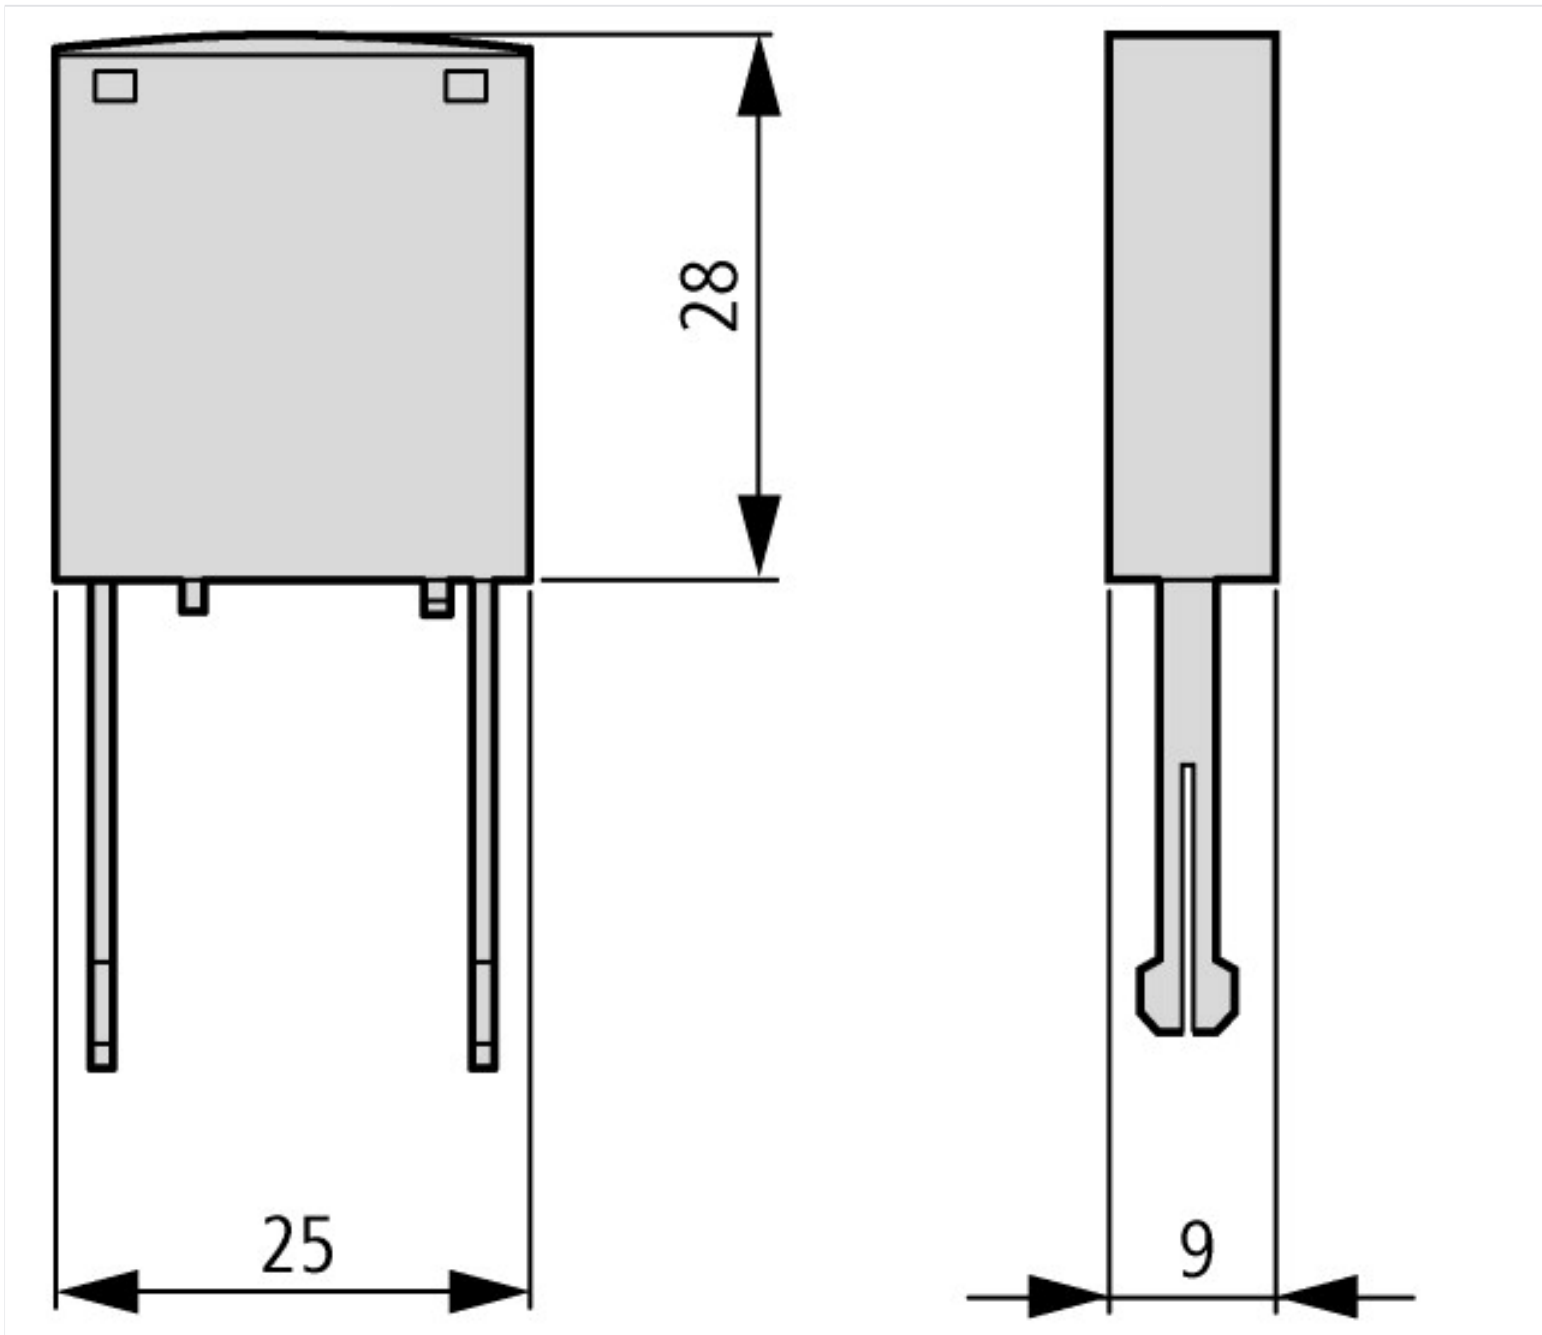

Additional product information (links)

IL03407014Z (AWA2100-2127) Contactor	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407014Z2010_10.pdf
--------------------------------------	---