

MCR-SL-S-200-U - Current transducers



2813460

<https://www.phoenixcontact.com/in/products/2813460>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR current measuring transducer, for measuring sinusoidal and non-sinusoidal alternating currents, input current 0...200 A, output voltage 0...(5) 10 V

Your advantages

- Can be retrofitted with open-up Rogowski coil
- 30 ... 6000 Hz true r.m.s. value measurement
- Measuring range selection via slide switch

Commercial data

Item number	2813460
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK4
Product key	CK4A22
Catalog page	Page 235 (C-5-2019)
GTIN	4046356043649
Weight per piece (including packing)	144.6 g
Weight per piece (excluding packing)	143.2 g
Customs tariff number	85437090
Country of origin	JP

Technical data

Product properties

Product type	Current transducer
Insulation characteristics	
Overvoltage category	III
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	1 W
Test voltage input/output	4.13 kV AC (50 Hz, 60 s)
Step response (10-90%)	< 340 ms
Maximum temperature coefficient	< 0.035 %/K
Maximum transmission error	< 1 % (of final value)
Rated insulation voltage	300 V AC (to earth)

Supply

Nominal supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	< 30 mA

Input data

Signal

Configurable/programmable	Yes
Current input signal	0 A ... 200 A

Measurement

Input current range	0 A AC ... 100 A AC
	0 A AC ... 150 A AC
	0 A AC ... 200 A AC
Setting range for min. input current	0 A AC ... 100 A AC
Setting range for max. input current	0 A AC ... 200 A AC
Overload capacity	Depending on laid conductor
Surge strength	Depending on through connected conductor
Frequency measuring range	30 Hz ... 6000 Hz
Curve type	Sinusoidal and non-sinusoidal
Operate threshold	1 % (of final value)

Output data

Signal: Voltage

Voltage output signal	0 V ... 5 V
	0 V ... 10 V
Max. voltage output signal	(0 V ... 10 V) 14 V, (0 V ... 5 V) 7 V

MCR-SL-S-200-U - Current transducers



2813460

<https://www.phoenixcontact.com/in/products/2813460>

Load/output load voltage output	≥ 10 kΩ
---------------------------------	---------

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm² ... 2.5 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm (4,4 ... 5,31 lbf-in.)
Connection method	Through connection

Dimensions

Item dimensions

Width	55 mm
Height	85 mm
Depth	70.5 mm

Circular conductor

Diameter	≤ 18.5 mm
----------	-----------

Material specifications

Color	green (RAL 6021)
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UKCA

Certificate	UKCA-compliant
-------------	----------------

UL, USA/Canada

Identification	UL/C-UL Listed UL 508
	Class I, Div. 2, Groups A, B, C, D T4A
	Class I, Zone 2, Group IIC T4A
	Or Non-Hazardous Locations only

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

MCR-SL-S-200-U - Current transducers



2813460

<https://www.phoenixcontact.com/in/products/2813460>

Mounting position	any
-------------------	-----

MCR-SL-S-200-U - Current transducers


2813460

<https://www.phoenixcontact.com/in/products/2813460>



Drawings

Dimensional drawing

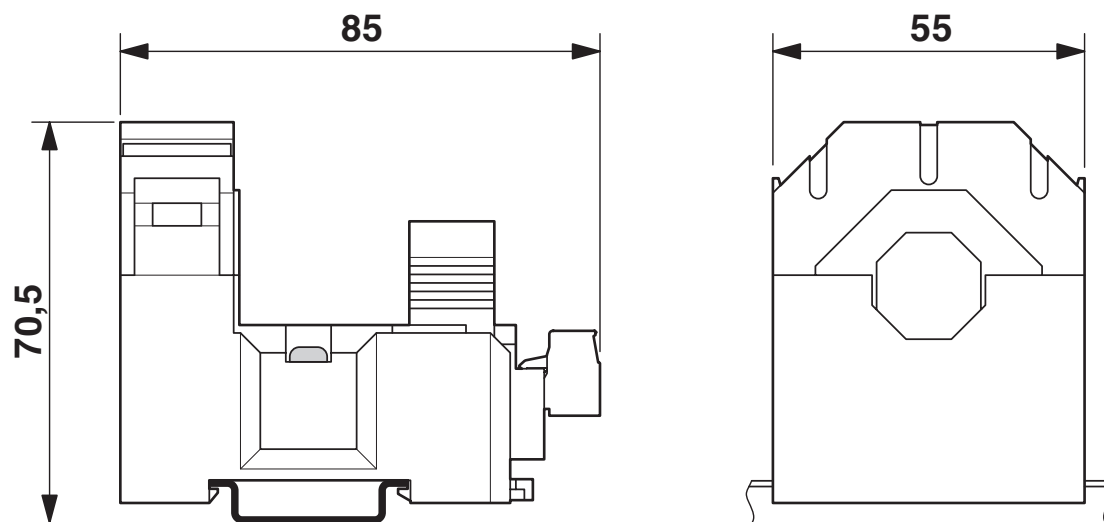


MCR-SL-S-200-U - Current transducers

2813460

<https://www.phoenixcontact.com/in/products/2813460>




Application drawing

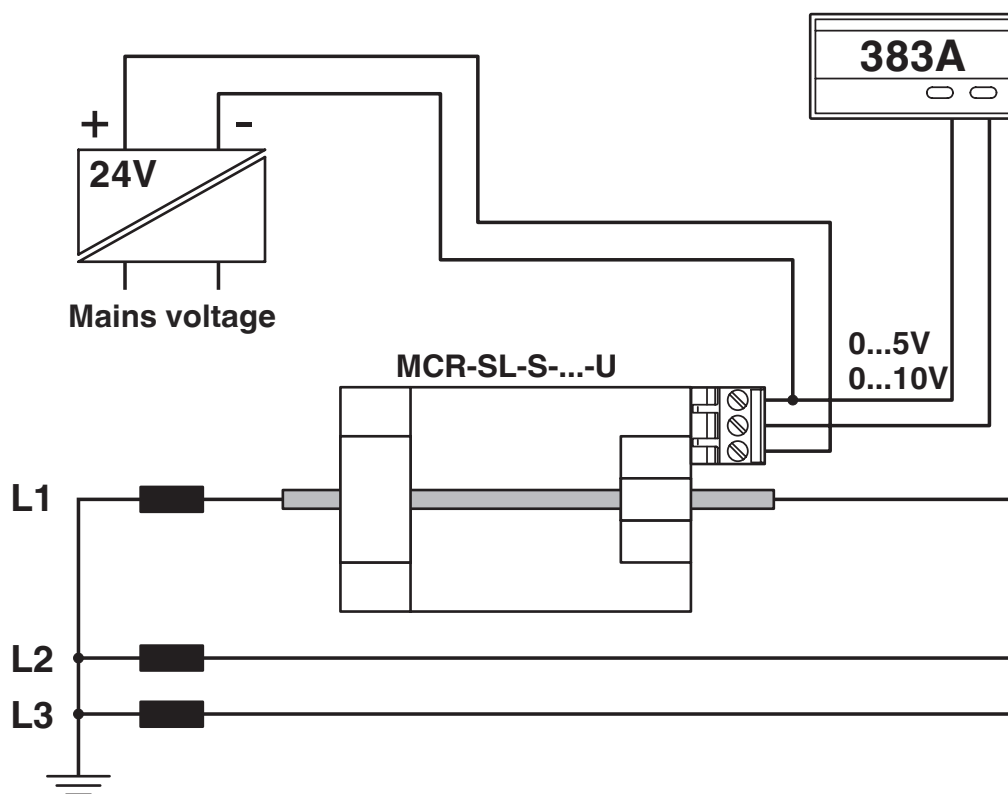

Current measurement

Circuit diagram

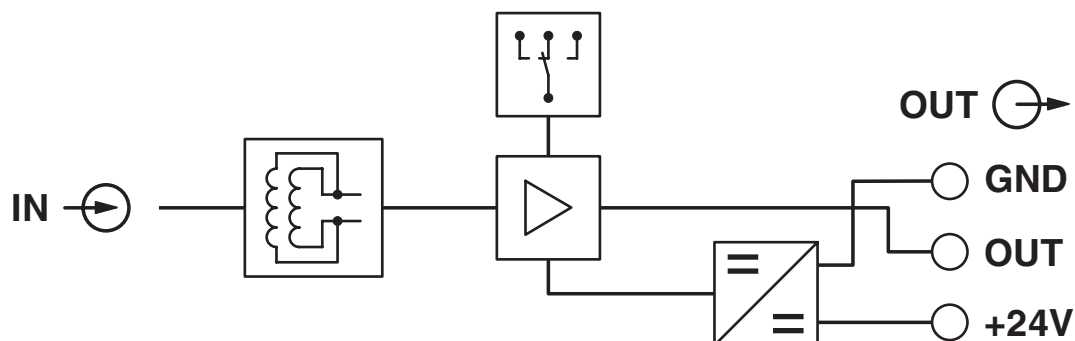

MCR-SL-S-200-U - Current transducers




2813460


<https://www.phoenixcontact.com/in/products/2813460>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2813460>



EAC
Approval ID: RU*DE.*08.B.01852-19



UL Listed
Approval ID: FILE E 123528



cUL Listed
Approval ID: FILE E 123528

cULus Listed

MCR-SL-S-200-U - Current transducers



2813460

<https://www.phoenixcontact.com/in/products/2813460>

Classifications

ECLASS

ECLASS-11.0	27210123
ECLASS-12.0	27210123
ECLASS-13.0	27210123

ETIM

ETIM 9.0	EC002475
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

MCR-SL-S-200-U - Current transducers



2813460
<https://www.phoenixcontact.com/in/products/2813460>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 25;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in