

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Interface module for connecting PoE twisted pair ports, RJ45, connection direction forward



Your advantages

- IEEE 802.3af
- Suitable for GHS system

Commercial data

Item number	2832904
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN
Product key	DNN142
Catalog page	Page 330 (C-6-2019)
GTIN	4046356076050
Weight per piece (including packing)	105.6 g
Weight per piece (excluding packing)	70 g
Customs tariff number	85176200
Country of origin	DE

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Extension module
Type	Block design

System properties

Functionality

Basic functions	Media module for Modular Managed Switch with Power over Ethernet IEEE802.3af, Power Source Equipment (PSE)
-----------------	--

Electrical properties

Maximum power dissipation for nominal condition	21.6 W
Test voltage	500 V AC
Transmission medium	Copper

Supply

Supply voltage	48 V DC (Internal / 48 V DC for PoE)
Supply voltage range	45.5 V DC ... 53 V DC
Power supply connection	From FL SWITCH GHS or FXT
Typical current consumption	10 mA (max. 900 mA)

Brake to be connected

Connection method	Can be plugged onto FL SWITCH MM HS or FL MXT
-------------------	---

Supply: Module electronics

Connection method	COMBICON
Supply voltage	48 V DC (via COMBICON; max. conductor cross section 2.5 mm ²)
Supply voltage range	44 V DC ... 53 V DC
Current consumption	max. 850 mA

Connection data

Connection method	Can be plugged onto FL SWITCH MM HS or FL MXT
-------------------	---

Interfaces

Ethernet

Connection method	RJ45
Transmission speed	10/100 Mbps (connection direction forwards)
Transmission physics	Ethernet in RJ45 twisted pair


FL IF 2PSE-F - Media module

2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Transmission length	100 m (per segment)
No. of channels	2 (PoE ports)
Transmission speed	10/100 Mbps (connection direction forwards)
Transmission length	100 m (per segment)
No. of channels	2

Dimensions

Dimensional drawing	
Width	31 mm
Height	84.7 mm
Depth	75.5 mm

Material specifications

Color	green
Flammability rating according to UL 94	V0
Housing material	PA 6.6

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 55 °C (non-condensing)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)
Vibration (operation)	in acc. with IEC 60068-2-6: 5g, 150 Hz

EMC data

Conformance with EMC directives	IEC 61000-6-2 IEC 61000-4-2 (ESD) Criterion B
	IEC 61000-4-3 (immunity to radiated interference) Criterion A
	IEC 61000-4-4 (burst) Criterion A
	IEC 61000-4-5 (surge) Criterion A
	IEC 61000-4-6 (immunity to conducted interference) Criterion A
	IEC 61000-4-8 (immunity to magnetic fields) Criterion A
	EN 55022 (emitted interference) Criterion A
Noise immunity	EN 61000-6-2:2005
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise emission	EN 61000-6-3/-4

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Standards and regulations

Free from substances that could impair the application of coating

In acc. with VW specification

Mounting

Mounting type

In the host system


FL IF 2PSE-F - Media module

2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Drawings

Dimensional drawing

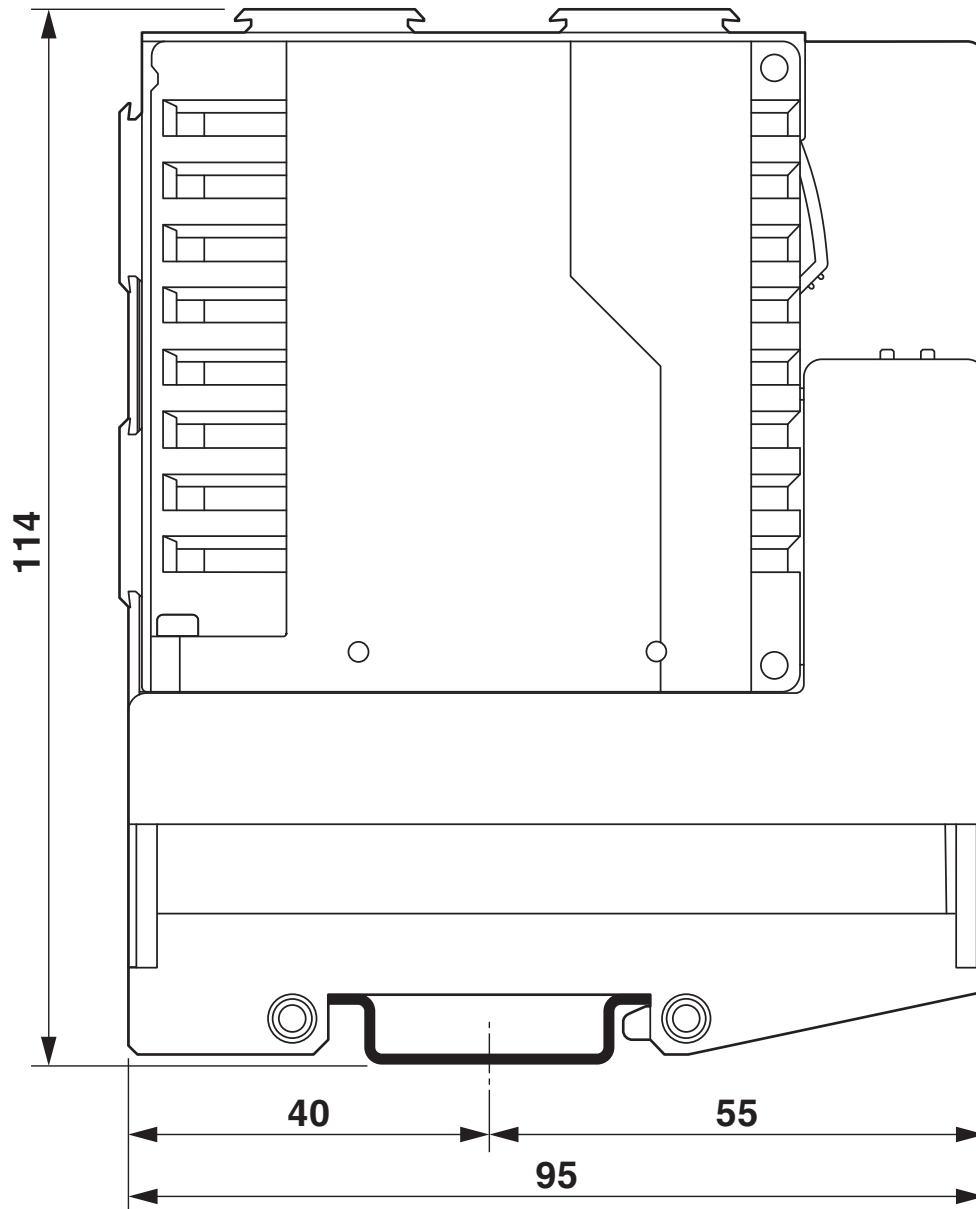

The figure shows a version of the interface module with the head station FL SWITCH MM HS

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sk/products/2832904>



cUL Recognized
Approval ID: FILE E 140324



UL Recognized
Approval ID: FILE E 140324



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827

cULus Recognized

cULus Listed

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Classifications

ECLASS

ECLASS-11.0	19170411
ECLASS-12.0	19170411
ECLASS-13.0	19170411

ETIM

ETIM 9.0	EC001467
----------	----------

UNSPSC

UNSPSC 21.0	43201500
-------------	----------

FL IF 2PSE-F - Media module



2832904

<https://www.phoenixcontact.com/sk/products/2832904>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.
Námestie Mateja Korvína 1
811 07 Bratislava
+421 2 3210 1470
obchod.sk@phoenixcontact.com