

REL-IR/LDP- 12DC/2X21 - Single relay



2834012

<https://www.phoenixcontact.com/pc/products/2834012>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in industrial relay with power contacts, 2 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity **A1+**, **A2-**, input voltage 12 V DC

Your advantages

- With detectable manual operation
- DC types with integrated freewheeling diode
- Mechanical switch position indicator
- Integrated status LED

Commercial data

Item number	2834012
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	CK6193
Catalog page	Page 386 (C-7-2015)
GTIN	4017918941611
Weight per piece (including packing)	38.24 g
Weight per piece (excluding packing)	38.24 g
Customs tariff number	85364190
Country of origin	JP

REL-IR/LDP- 12DC/2X21 - Single relay



2834012

<https://www.phoenixcontact.com/pc/products/2834012>

Technical data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	5x 10 ⁷ cycles

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	0.9 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U _N	12 V DC
Input voltage range	9.4 V DC ... 18 V DC
Input voltage range in reference to U _N	see diagram
Drive and function	monostable
Typical input current at U _N	75 mA
Typical response time	13 ms
Typical release time	14 ms
Coil resistance	160 Ω ±15 % (at 20 °C)

Output data

Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	Ag
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V
Limiting continuous current	10 A
Maximum inrush current	20 A (15 ms)
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	2500 VA (for 250 V AC)

Connection data

Connection method	Plug-in connection
-------------------	--------------------

REL-IR/LDP- 12DC/2X21 - Single relay



2834012

<https://www.phoenixcontact.com/pc/products/2834012>

Dimensions

Width	21.5 mm
Height	28 mm
Depth	36 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Ambient temperature (operation)	-55 °C ... 70 °C
Ambient temperature (storage/transport)	-55 °C ... 70 °C

Standards and regulations


Standards/regulations	DIN EN 61810-1
	VDE 0435-201
	EN 50178

Mounting

Assembly note	On relay base PR2
Mounting position	any

Drawings

Diagram

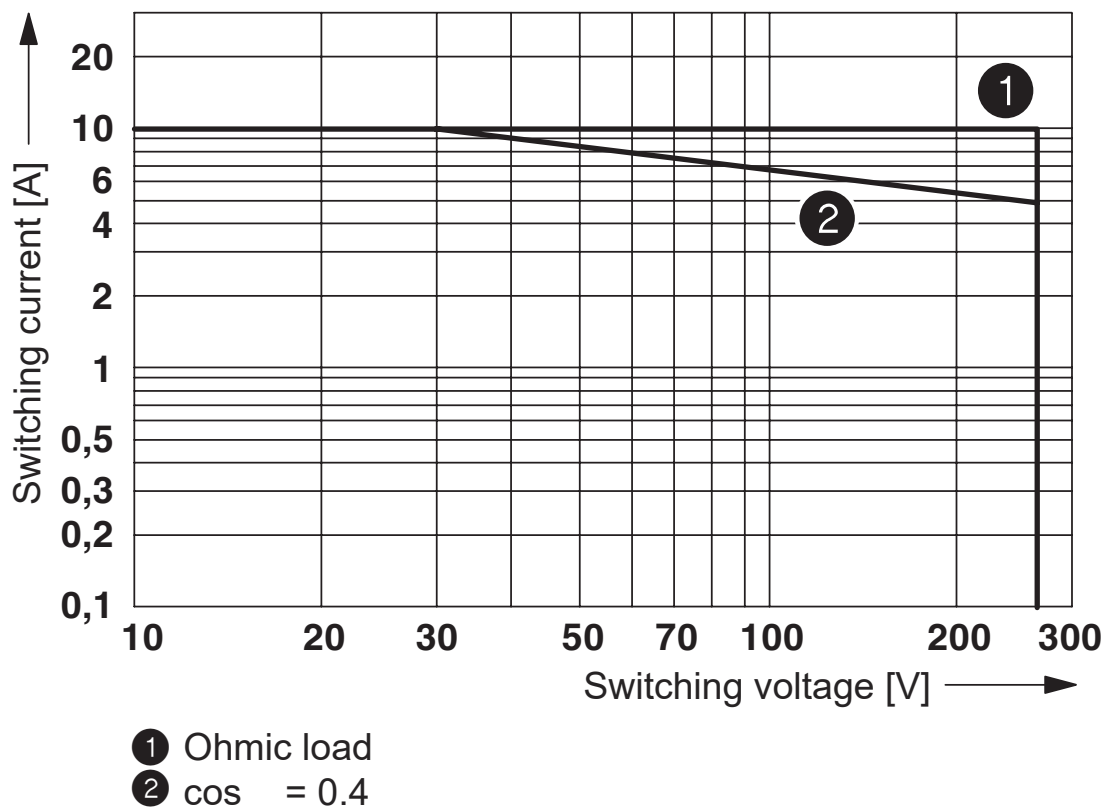


AC interrupting rating

2834012


<https://www.phoenixcontact.com/pc/products/2834012>

Diagram

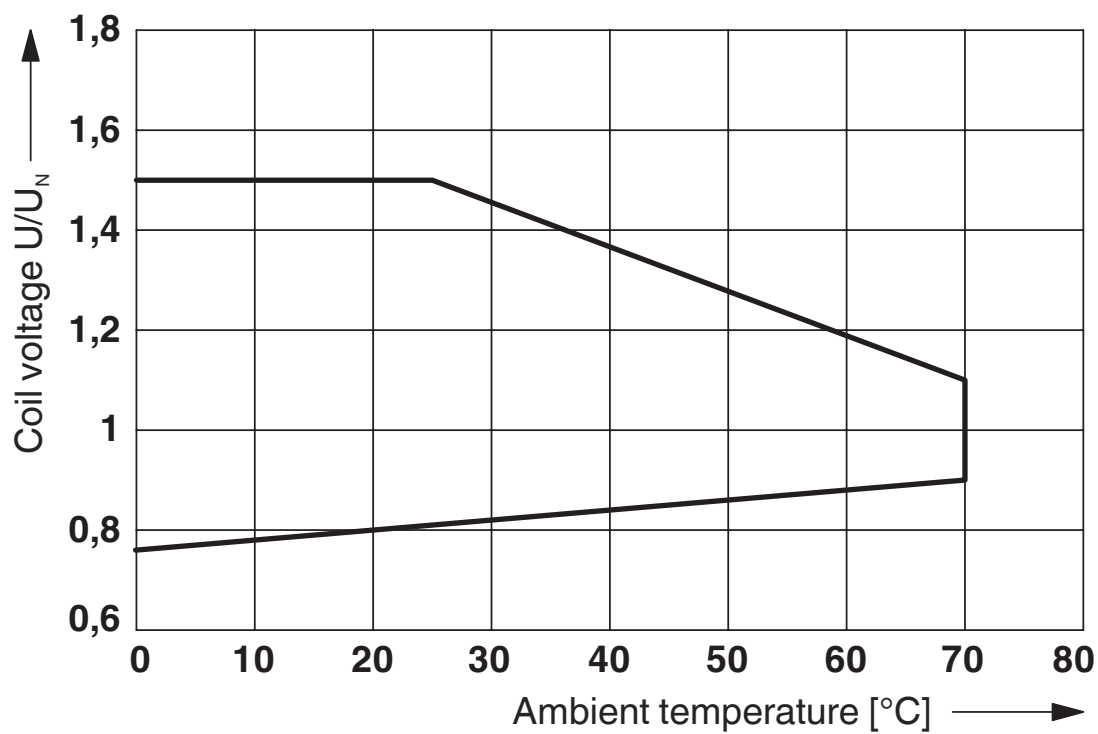

Operating voltage range


2834012
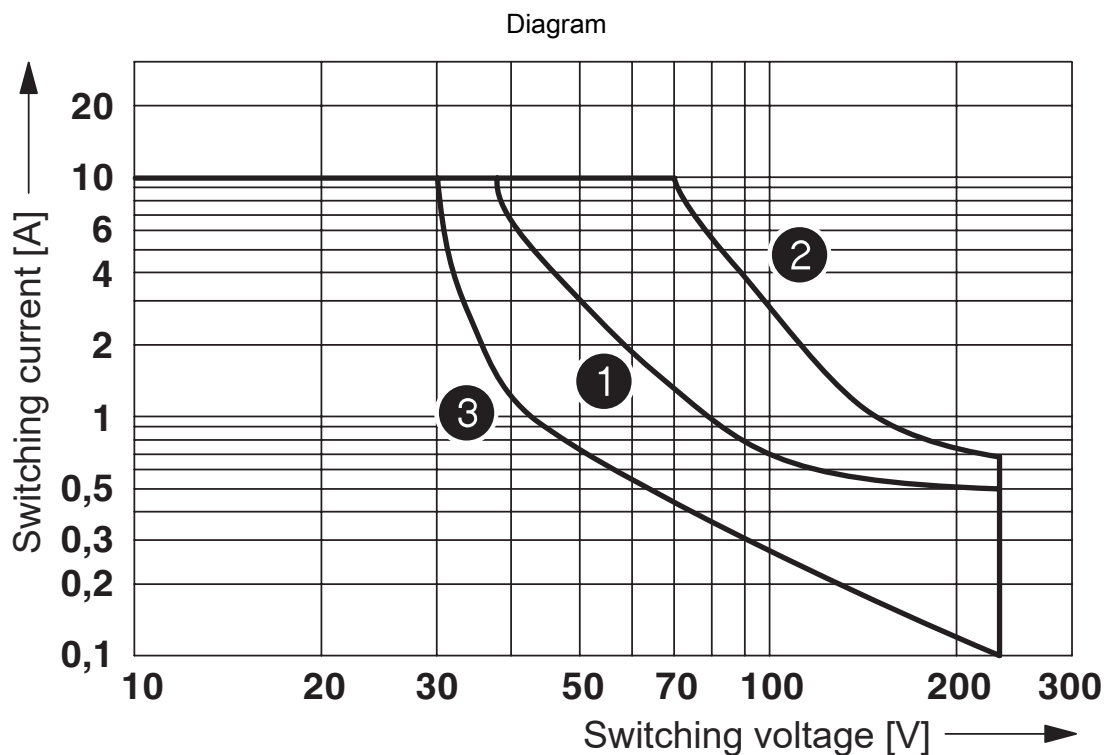
<https://www.phoenixcontact.com/pc/products/2834012>

- ① Ohmic load
- ② ohmic load, contacts in series
- ③ L/R < 7 ms

DC interrupting rating


2834012
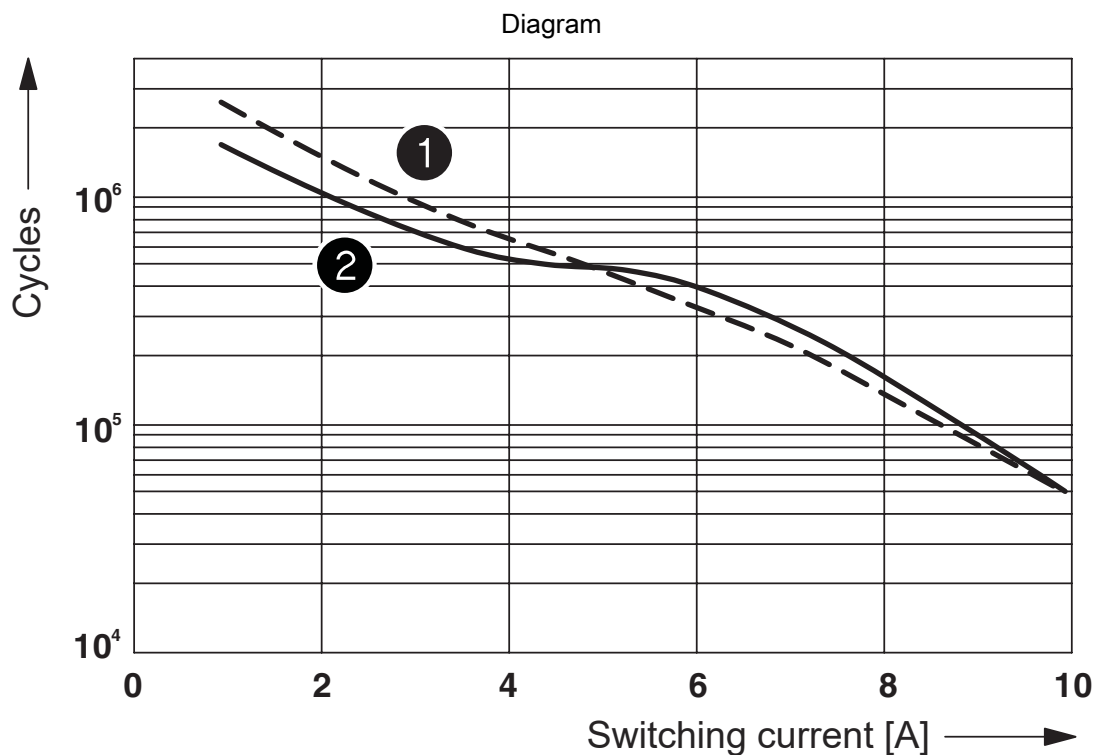
<https://www.phoenixcontact.com/pc/products/2834012>


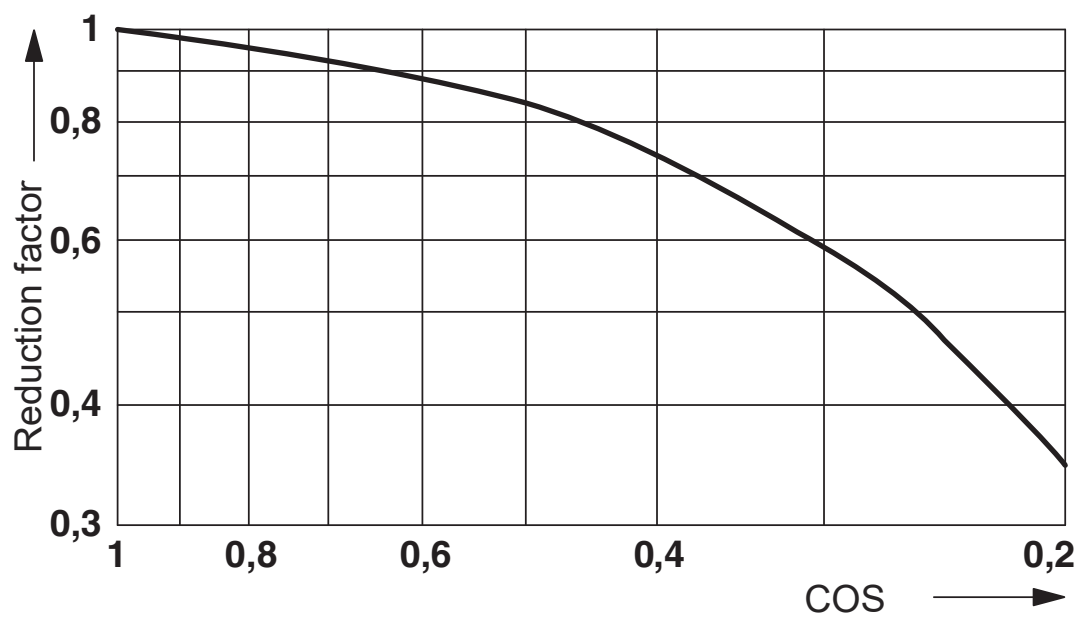
- ① 250 V AC, ohmic load
- ② 30 V DC, ohmic load

Electrical service life

Circuit diagram

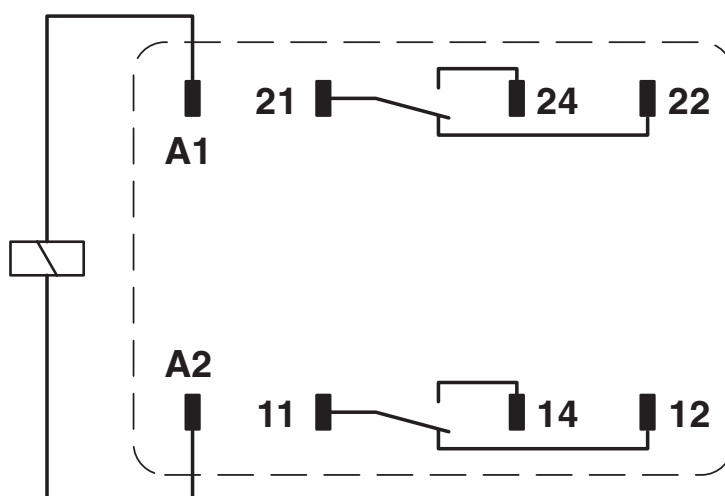

Diagram



Service life reduction factor

REL-IR/LDP- 12DC/2X21 - Single relay



2834012

<https://www.phoenixcontact.com/pc/products/2834012>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

REL-IR/LDP- 12DC/2X21 - Single relay



2834012

<https://www.phoenixcontact.com/pc/products/2834012>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com