

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 24 V AC

Your advantages

- With detectable manual operation
- Integrated status LED
- DC types with integrated freewheeling diode
- Mechanical switch position indicator

Commercial data

Item number	2834122
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C460
Product key	CK6193
Catalog page	Page 386 (C-7-2015)
GTIN	4017918941680
Weight per piece (including packing)	36.9 g
Weight per piece (excluding packing)	35.83 g
Customs tariff number	85364190
Country of origin	JP

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

Technical data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	5x 10 ⁷ cycles

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1.1 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U _N	24 V AC
Input voltage range	18.7 V AC ... 36 V AC
Mains frequency	50/60 Hz
Drive and function	monostable
Typical input current at U _N	54 mA (at 50 Hz) 46 mA (At 60 Hz)
Typical response time	4 ms ... 10 ms (AC, depending on phase relation)
Typical release time range	3 ms ... 12 ms (AC, depending on phase relation)
Coil resistance	180 Ω ±15 % (at 20 °C)

Output data

Switching

Contact switching type	4 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Limiting continuous current	5 A
Maximum inrush current	12 A (15 ms)
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	1250 VA (for 250 V AC)

Connection data

Connection method	Plug-in connection
-------------------	--------------------

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

Dimensions

Width	21.5 mm
Height	28 mm
Depth	36 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Ambient temperature (operation)	-55 °C ... 70 °C
Ambient temperature (storage/transport)	-55 °C ... 70 °C

Standards and regulations


Standards/regulations	DIN EN 61810-1
	VDE 0435-201
	EN 50178

Mounting


Assembly instructions	On relay base PR2
Mounting position	any

Drawings

Diagram

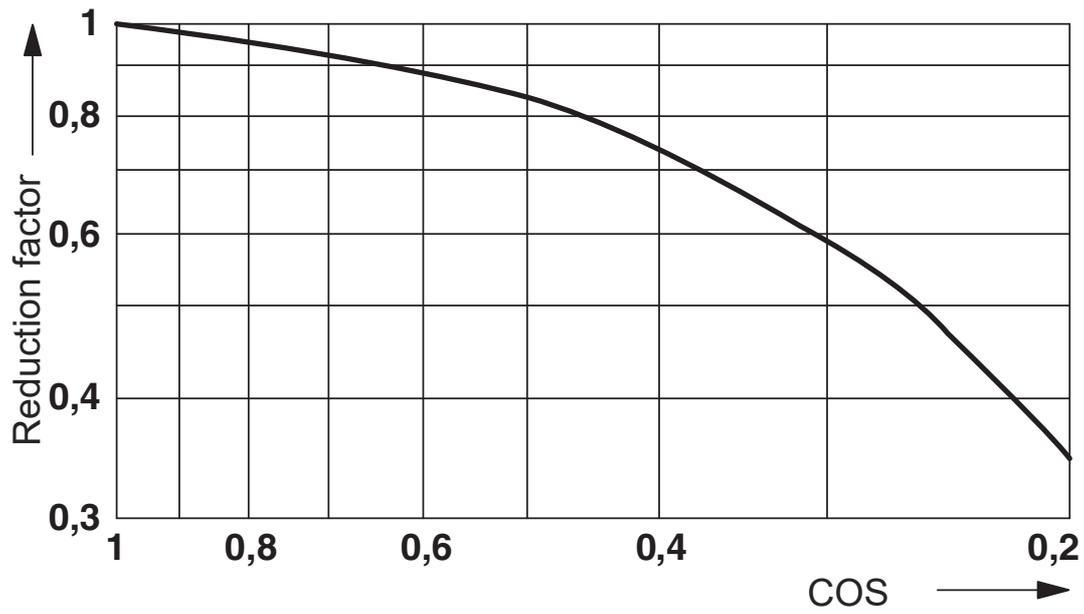


Service life reduction factor

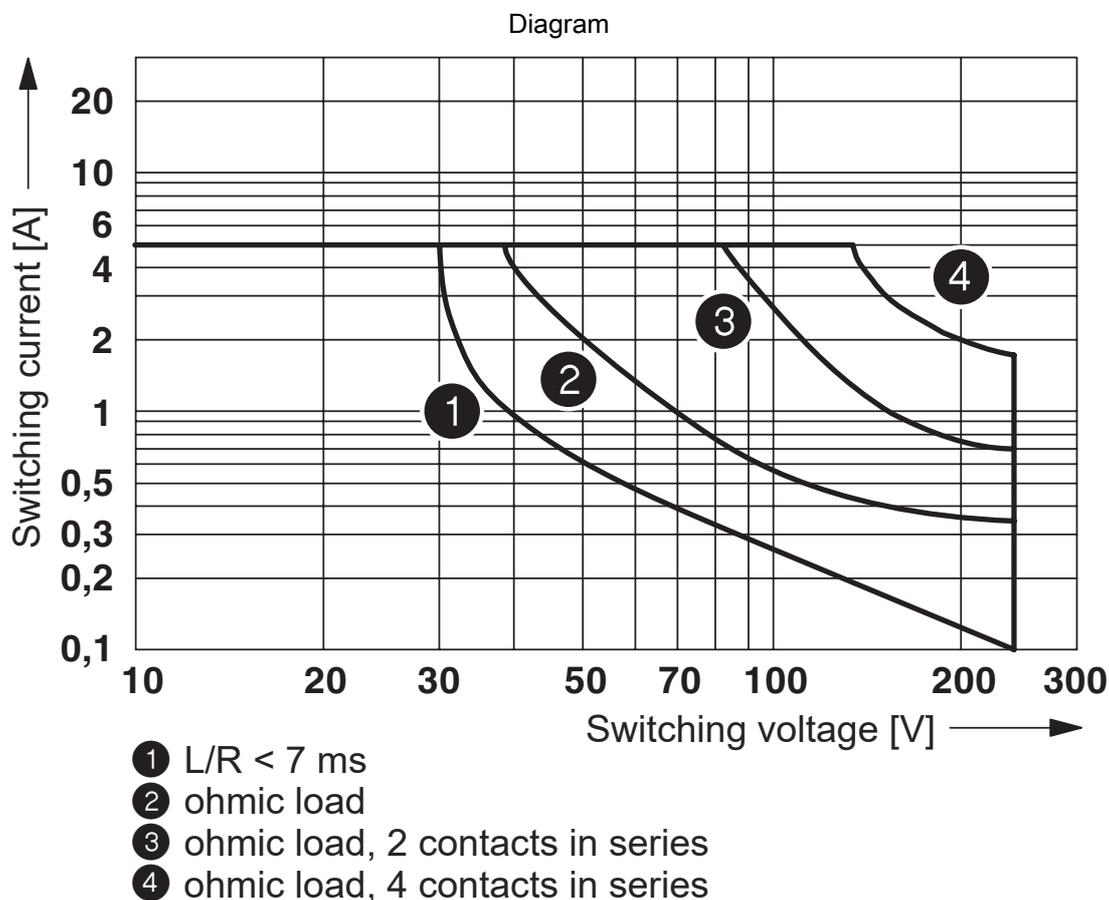


DC interrupting rating

Diagram

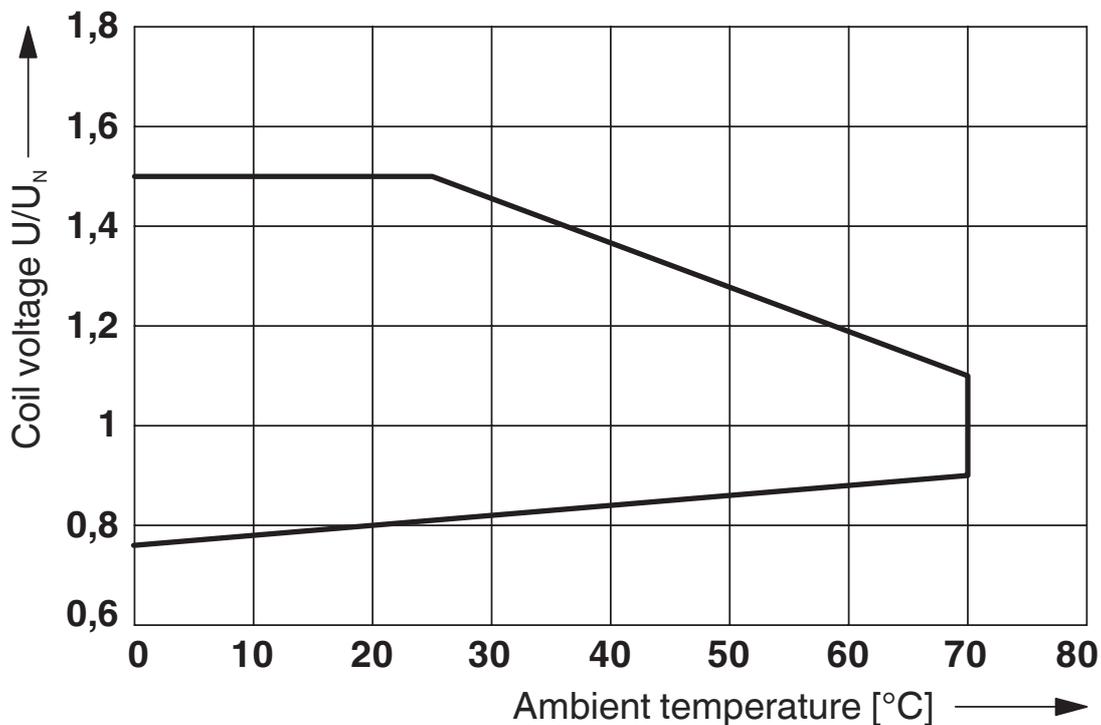

Operating voltage range

Circuit diagram

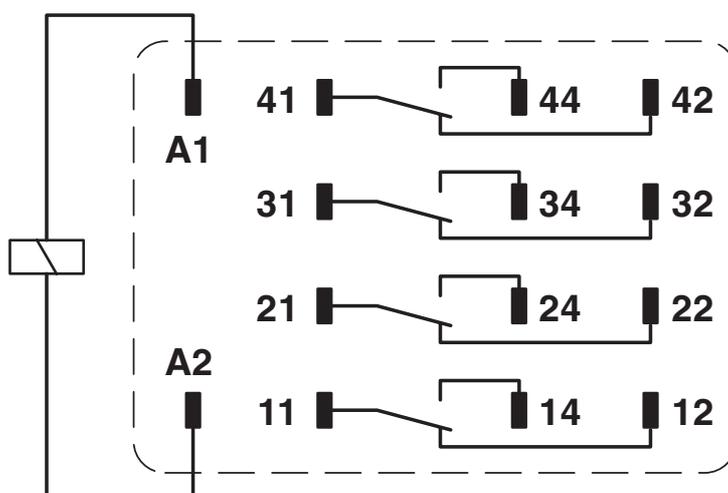


REL-IR/L- 24AC/4X21AU - Single relay

2834122

<https://www.phoenixcontact.com/us/products/2834122>

Diagram

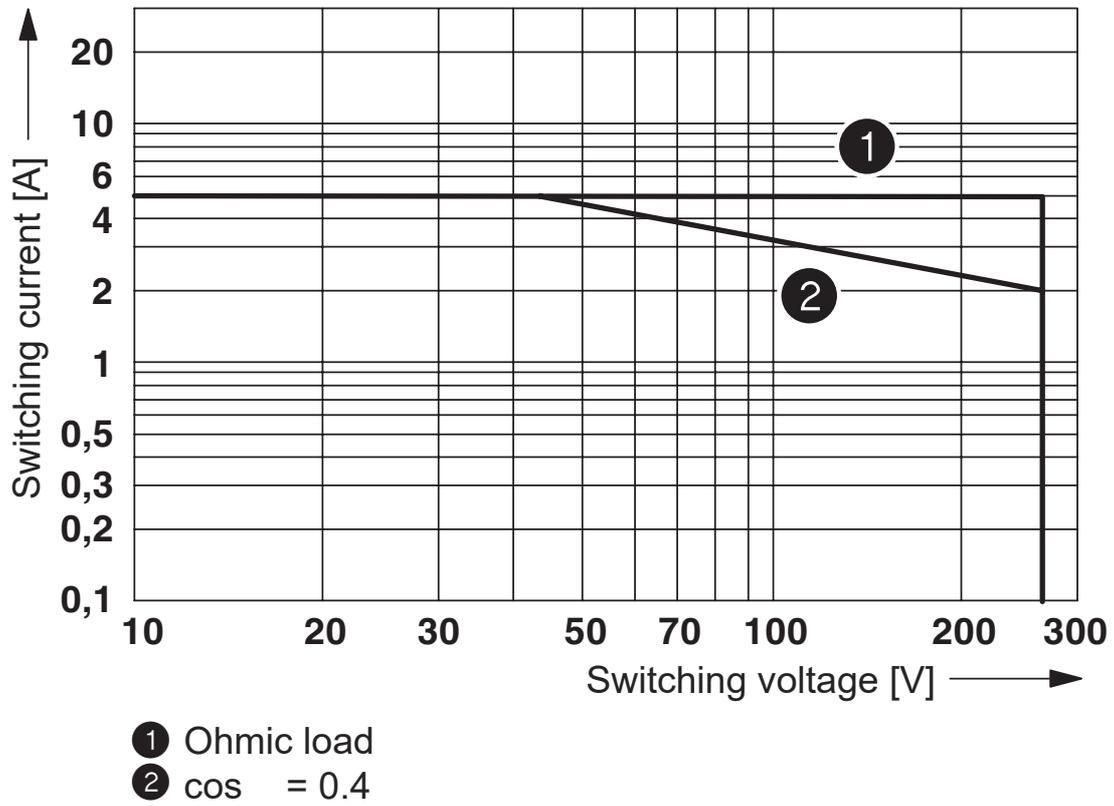


AC interrupting rating

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

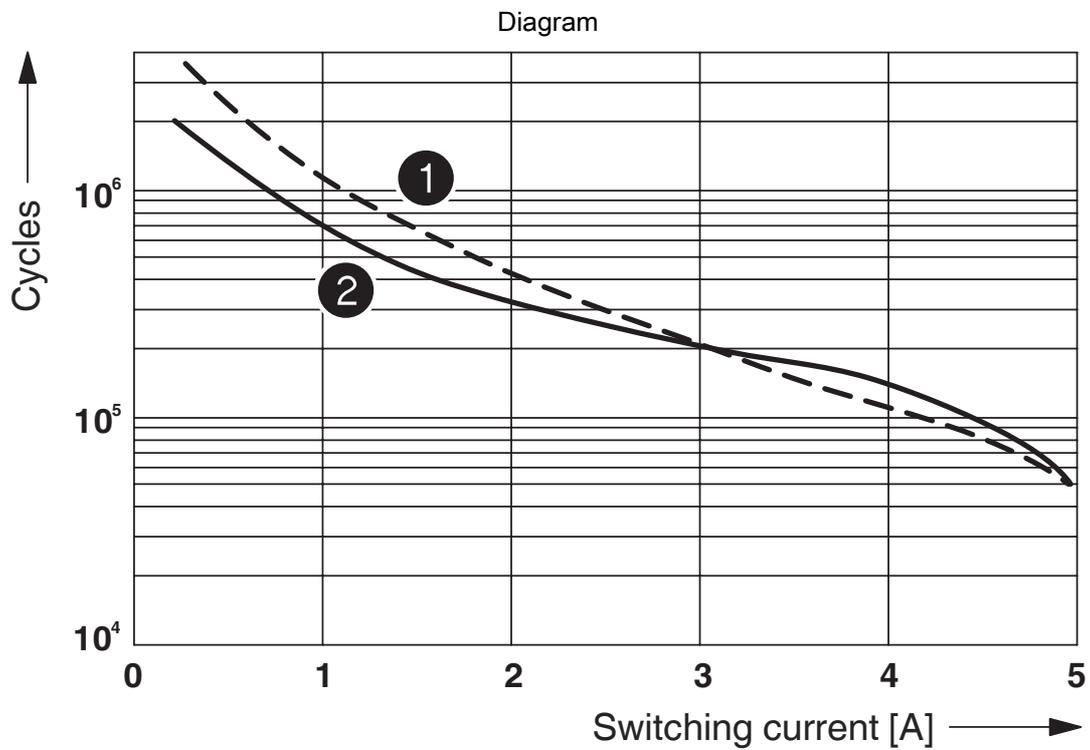

① 250 V AC, ohmic load

② 30 V DC, ohmic load

Electrical service life

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

REL-IR/L- 24AC/4X21AU - Single relay



2834122

<https://www.phoenixcontact.com/us/products/2834122>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com