

REL-IR/L-230AC/4X21AU - Single relay



2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, mechanical switching position indicator, coil voltage: 230 V AC

Your advantages

- With detectable manual operation
- DC types with integrated freewheeling diode
- Mechanical switch position indicator
- Integrated status LED

Commercial data

Item number	2834148
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	CK6193
Catalog page	Page 386 (C-7-2015)
GTIN	4017918941833
Weight per piece (including packing)	37.988 g
Weight per piece (excluding packing)	37.38 g
Customs tariff number	85364900
Country of origin	JP

REL-IR/L-230AC/4X21AU - Single relay



2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Technical data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	5x 10 ⁷ cycles

Data management status

Date of last data management	22.05.2024
------------------------------	------------

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1.2 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U _N	230 V AC
Input voltage range	179.4 V AC ... 345 V AC
Mains frequency	50/60 Hz
Drive and function	monostable
Typical input current at U _N	5 mA (at 50 Hz)
	4 mA (At 60 Hz)
Typical response time	4 ms ... 10 ms (AC, depending on phase relation)
Typical release time range	3 ms ... 12 ms (AC, depending on phase relation)
Coil resistance	18790 Ω ±15 % (at 20 °C)

Output data

Switching

Contact switching type	4 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Limiting continuous current	5 A
Maximum inrush current	12 A (15 ms)
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	1250 VA (for 250 V AC)

REL-IR/L-230AC/4X21AU - Single relay



2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Connection data

Connection method	Plug-in connection
-------------------	--------------------

Dimensions

Width	21.5 mm
Height	28 mm
Depth	36 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Ambient temperature (operation)	-55 °C ... 70 °C
Ambient temperature (storage/transport)	-55 °C ... 70 °C

Standards and regulations


Standards/regulations	DIN EN 61810-1
	VDE 0435-201
	EN 50178

Mounting

Assembly note	On relay base PR2
Mounting position	any

Drawings

Diagram

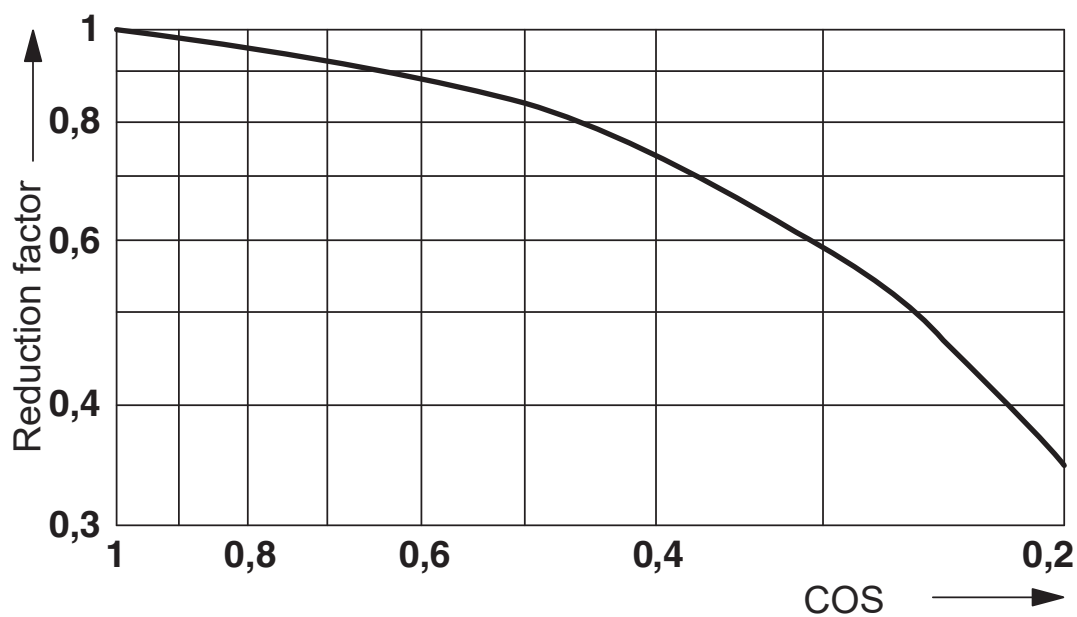


Service life reduction factor


2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Diagram

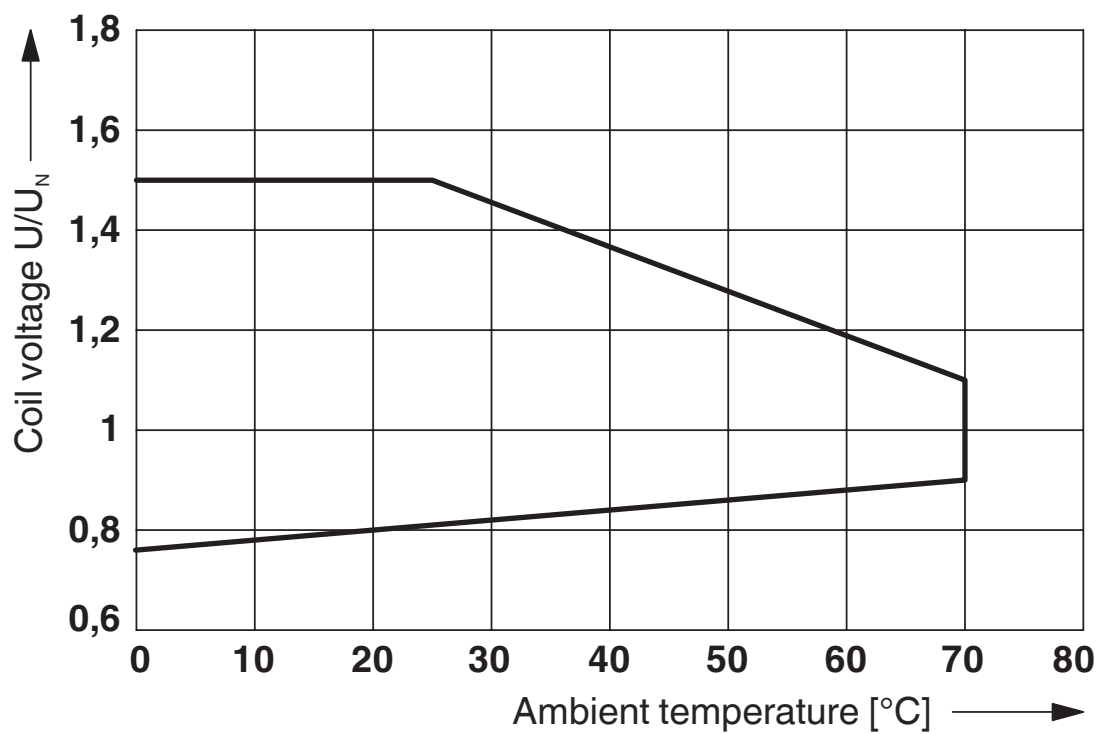

Operating voltage range

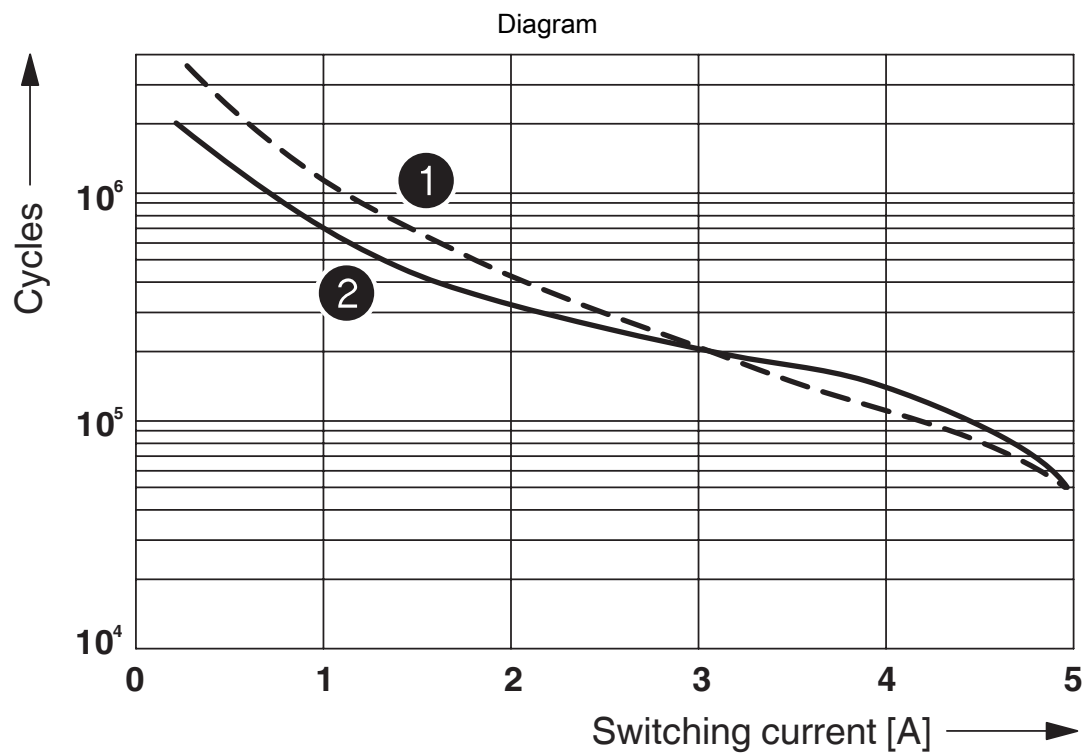


① 250 V AC, ohmic load

② 30 V DC, ohmic load

Electrical service life


Circuit diagram

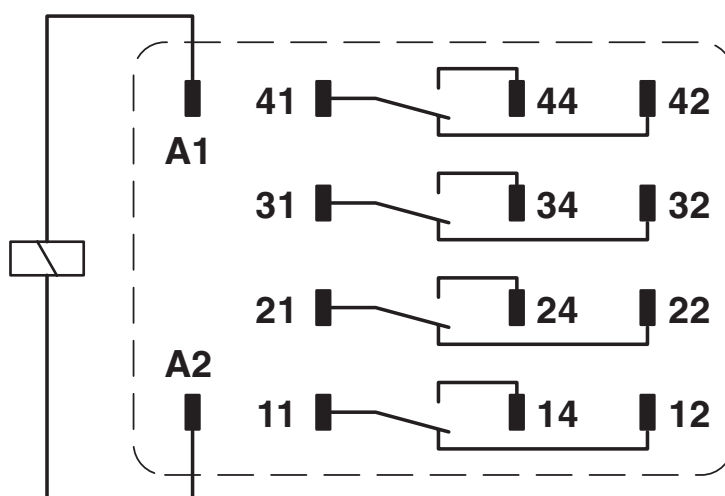

2834148


<https://www.phoenixcontact.com/pc/products/2834148>

Diagram

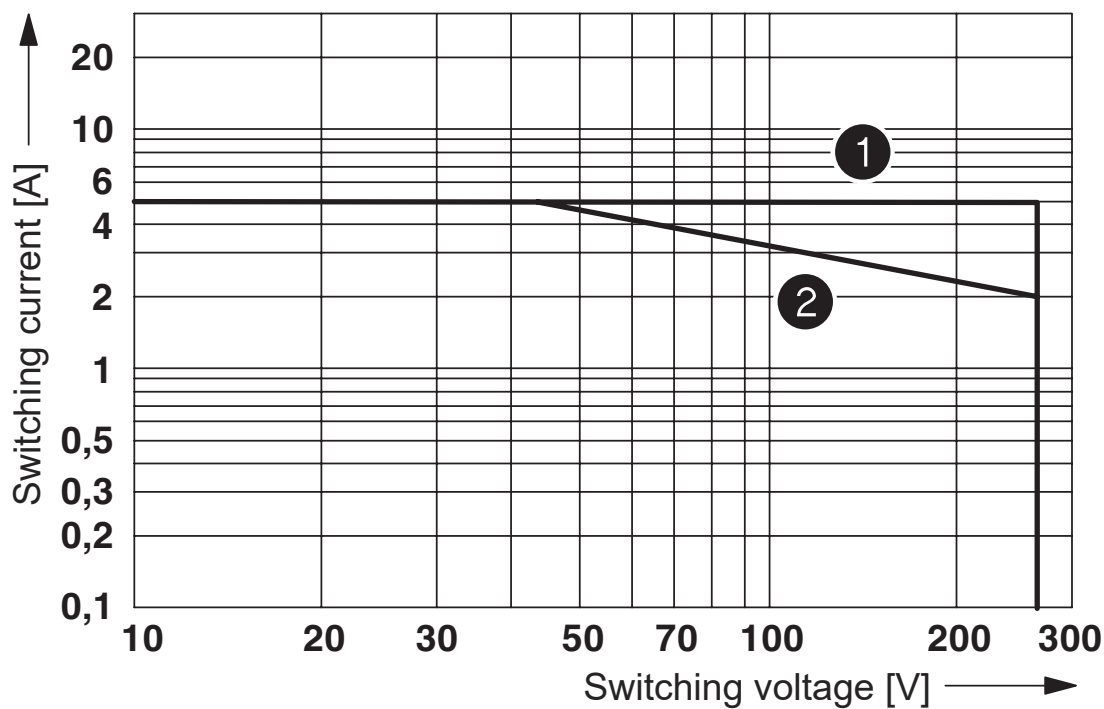

- ① Ohmic load
② $\cos \varphi = 0.4$

AC interrupting rating

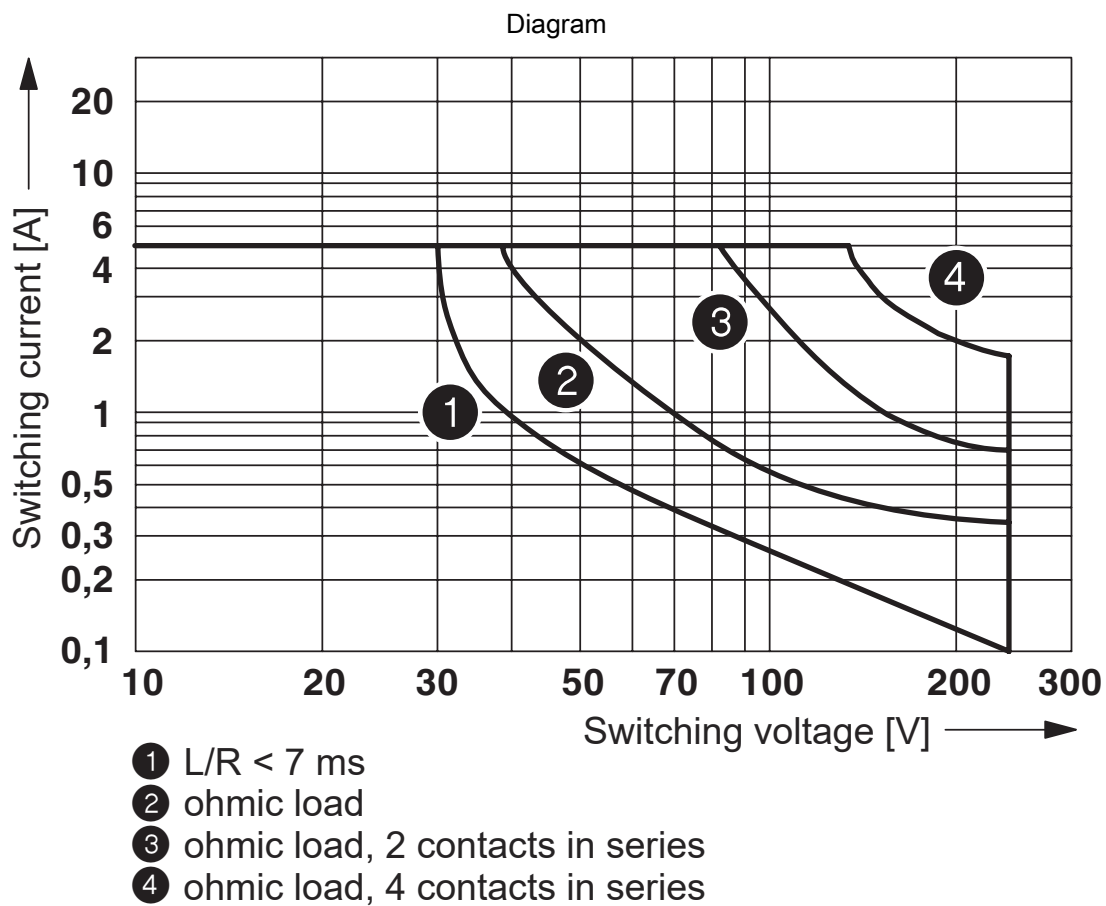

DC interrupting rating

REL-IR/L-230AC/4X21AU - Single relay



2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

REL-IR/L-230AC/4X21AU - Single relay



2834148

<https://www.phoenixcontact.com/pc/products/2834148>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com