

REL-OR-230AC/2X21 - Single relay



2834261

<https://www.phoenixcontact.com/pc/products/2834261>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in octal relays with power contacts, 2 changeover contacts, test button, mechanical switching position indicator, coil voltage: 230 V AC

Your advantages

- With detectable manual operation
- Extremely rugged design
- Mechanical switch position indicator

Commercial data

Item number	2834261
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	CK6193
Catalog page	Page 390 (C-7-2015)
GTIN	4017918941871
Weight per piece (including packing)	110.29 g
Weight per piece (excluding packing)	110 g
Customs tariff number	85364900
Country of origin	CN

REL-OR-230AC/2X21 - Single relay



2834261

<https://www.phoenixcontact.com/pc/products/2834261>

Technical data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	10x 10 ⁶ cycles

Data management status

Date of last data management	22.05.2024
------------------------------	------------

Insulation characteristics

Overvoltage category	II
Pollution degree	3

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	2.3 W
Test voltage (Winding/contact)	2.5 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2.5 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U_N	230 V AC
Input voltage range	184 V AC ... 253 V AC
Input voltage range in reference to U_N	0.8 ... 1.1
Mains frequency	50/60 Hz
Drive and function	monostable
Typical input current at U_N	10 mA (at 50 Hz) 11 mA (At 60 Hz)
Typical response time	5 ms ... 20 ms (AC, depending on phase relation)
Typical release time range	5 ms ... 20 ms (AC, depending on phase relation)
Coil resistance	6170 Ω $\pm$ 15 % (at 20 °C)

Output data

Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	AgSnIn
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Limiting continuous current	10 A (N/O contact) 5 A (N/C contact)
Maximum inrush current	on request

REL-OR-230AC/2X21 - Single relay



2834261

<https://www.phoenixcontact.com/pc/products/2834261>

Min. switching current	10 mA
Interrupting rating (ohmic load) max.	2500 VA (for 250 V AC)

Connection data

Connection method	Plug-in connection
-------------------	--------------------

Dimensions

Width	34.5 mm
Height	34.5 mm
Depth	52.5 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Degree of protection (Installation location)	≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C
Altitude	≤ 2000 m

Standards and regulations


Standards/regulations	IEC 60664
-----------------------	-----------

Mounting

Assembly note	On relay base PR3
Mounting position	any

Drawings


Diagram

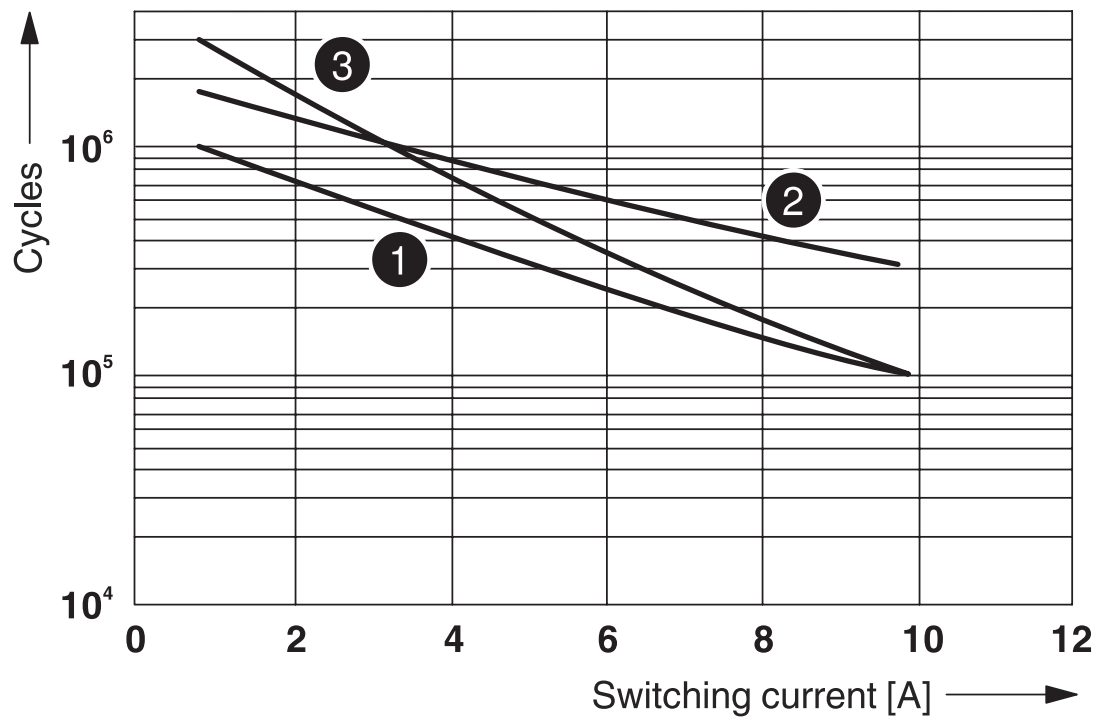

- ① 250 V AC, ohmic load
- ② 120 V DC, ohmic load
- ③ 28 V DC, ohmic load

Electrical service life


Circuit diagram

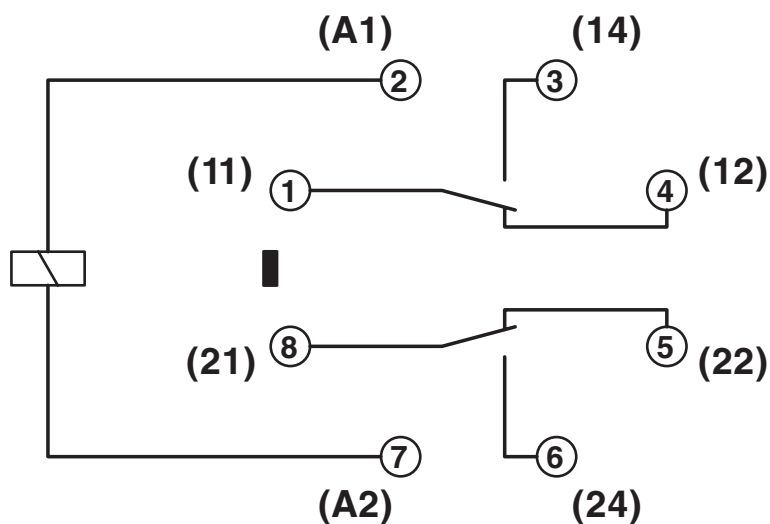

REL-OR-230AC/2X21 - Single relay

2834261

<https://www.phoenixcontact.com/pc/products/2834261>

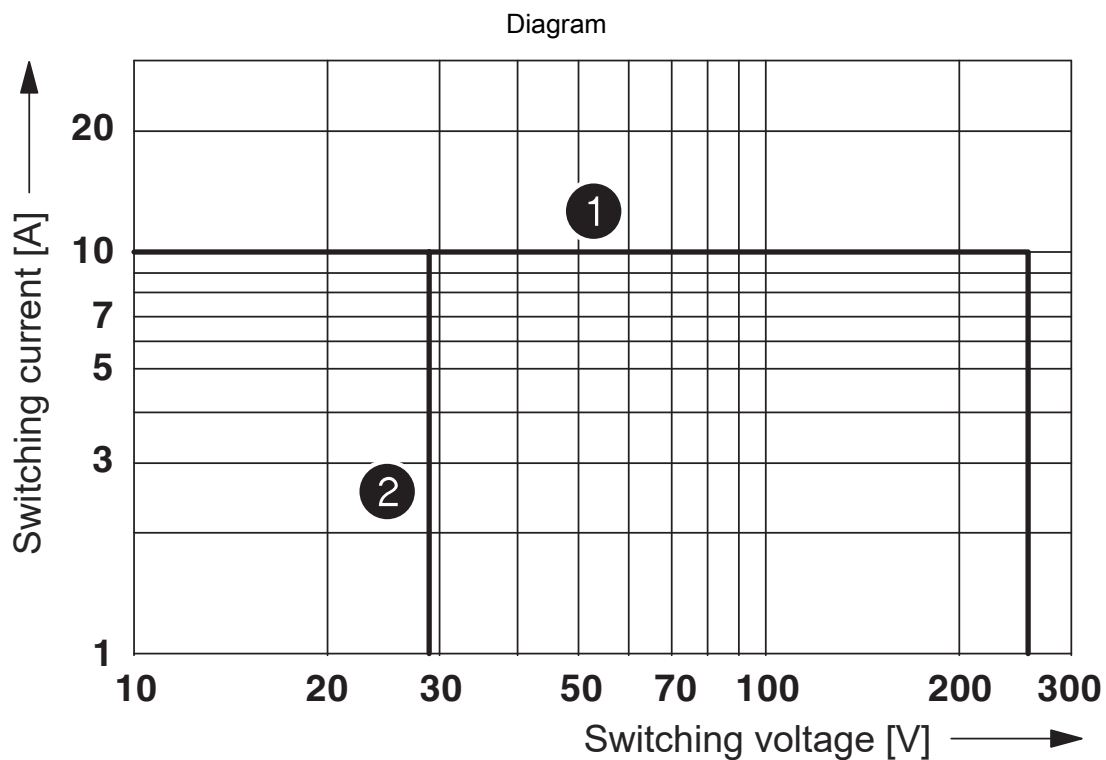

- ① AC, ohmic load
- ② DC, ohmic load

Interrupting rating

Diagram



Service life reduction factor with various cos phi

REL-OR-230AC/2X21 - Single relay



2834261

<https://www.phoenixcontact.com/pc/products/2834261>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

REL-OR-230AC/2X21 - Single relay

2834261

<https://www.phoenixcontact.com/pc/products/2834261>



Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com