

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Pre-assembled relay modules with screw connection, consisting of: relay base, industrial relay with integrated LED and engage/disengage manual activate layer, varistor protective module, and retaining bracket. Input voltage: 230 V AC, 2 changeover contacts, 10 A

Your advantages

- Relay with detectable manual operation and status LED
- With DC types, freewheeling diode is integrated in relay
- 4-changeover contact types with multi-layer gold contacts
- Logical contact arrangement thanks to 1/3-level relay base
- Mechanical switch position indicator

Commercial data

Item number	2834672
Packing unit	5 pc
Minimum order quantity	1 pc
Product key	CK631A
Catalog page	Page 396 (C-7-2015)
GTIN	4017918996253
Weight per piece (including packing)	121.85 g
Weight per piece (excluding packing)	118.3 g
Customs tariff number	85364900
Country of origin	CN

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672


<https://www.phoenixcontact.com/pc/products/2834672>

Set consists of

PR2-BSC3/4X21 - Relay base

2833576

<https://www.phoenixcontact.com/pc/products/2833576>



Relay base PR2-B, for industrial relay REL-IR with 2 or 4 changeover contacts, 1/3-level design, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

REL-IR/L-230AC/2X21 - Single relay

2834070

<https://www.phoenixcontact.com/pc/products/2834070>



Plug-in industrial relays with power contacts, 2 changeover contacts, test button, status LED, mechanical switching position indicator, input voltage: 230 V AC

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

V-120-230UC - Plug-in module

2833880

<https://www.phoenixcontact.com/pc/products/2833880>



Plug-in module, with varistor, input voltage: 120 ... 230 V AC/DC ± 20 %

EL2-P35 - Retaining bracket

2833592

<https://www.phoenixcontact.com/pc/products/2833592>



Relay retaining bracket, with eject function and integrated equipment marking area (8 x 25 mm), to suit relay base PR2, for 35 mm high industrial relay

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

MP 2 - Marker labels

2833644

<https://www.phoenixcontact.com/pc/products/2833644>

Equipment marker, labeling surface 9 x 25 mm



PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

Technical data

Product properties

Product type	Relay Module
Application	Universal
Operating mode	100% operating factor
Mechanical service life	5x 10 ⁷ cycles

Insulation characteristics

Overvoltage category	II
Pollution degree	3

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1.15 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2 kV AC (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U _N	230 V AC
Input voltage range	179.4 V AC ... 345 V AC
Drive and function	monostable
Typical input current at U _N	5 mA (at 50 Hz)
	4 mA (At 60 Hz)
Typical response time	4 ms ... 10 ms
Typical release time range	3 ms ... 12 ms
Protective circuit	Varistor
Operating voltage display	LED red

Output data

Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	Ag
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V
Limiting continuous current	10 A
Maximum inrush current	20 A (15 ms)
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	240 W (at 24 V DC)
	160 W (at 48 V DC)
	110 W (at 60 V DC)

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

72 W (at 110 V DC)
130 W (at 220 V DC)
2500 VA (for 250 V AC)

Connection data

Coil side

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Contact side

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Dimensions

Width	27 mm
Height	78.5 mm
Depth	86 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection (Relay)	RT I (Relay)
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Standards and regulations


Standards/regulations	IEC 60664
	EN 50178

Mounting

Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any


Drawings

Diagram

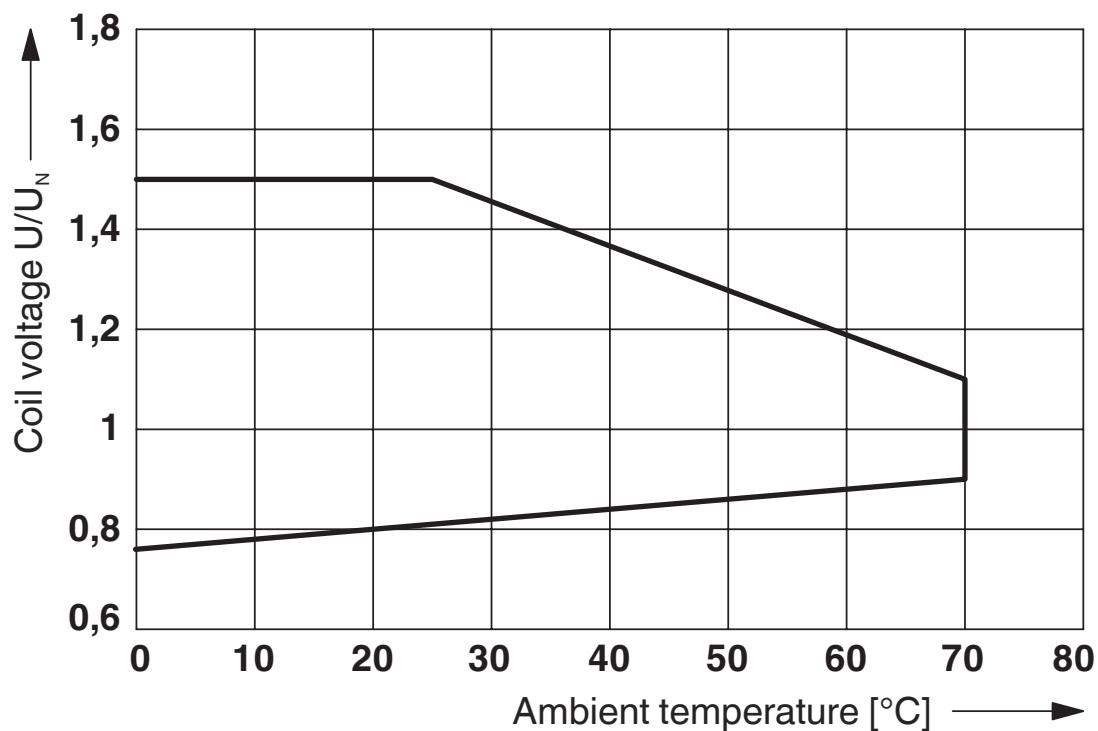

Operating voltage range of relay $T_u = T_{coil}$


Diagram

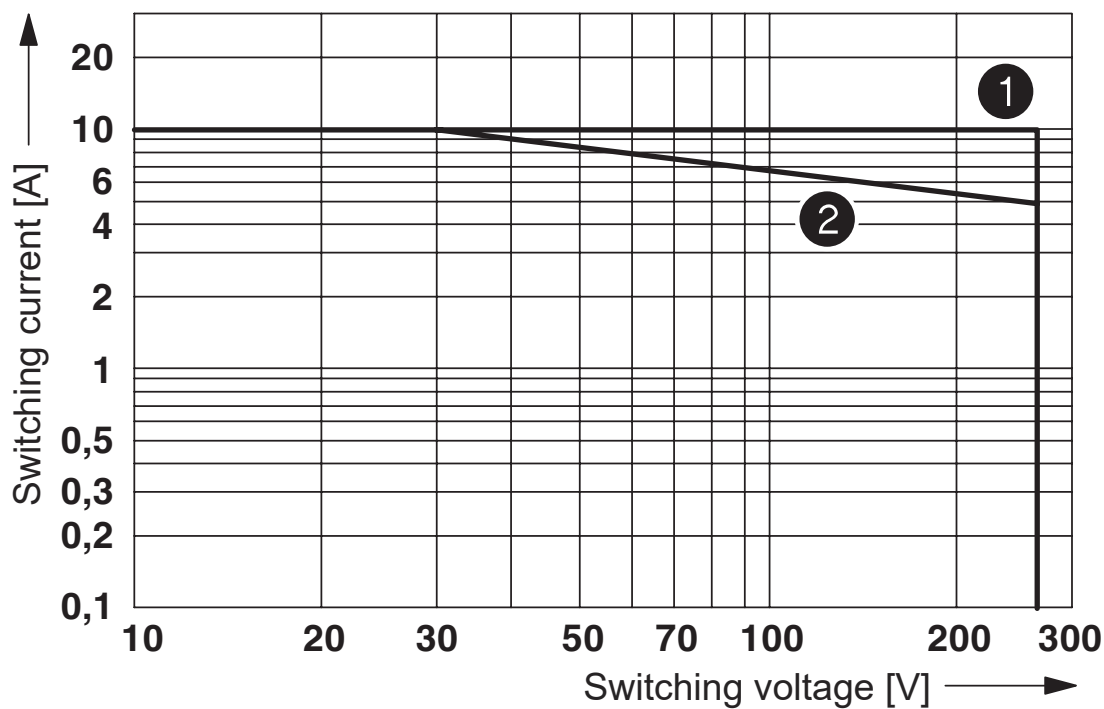


- ① Ohmic load
- ② $\cos \varphi = 0.4$

AC interrupting rating


Circuit diagram

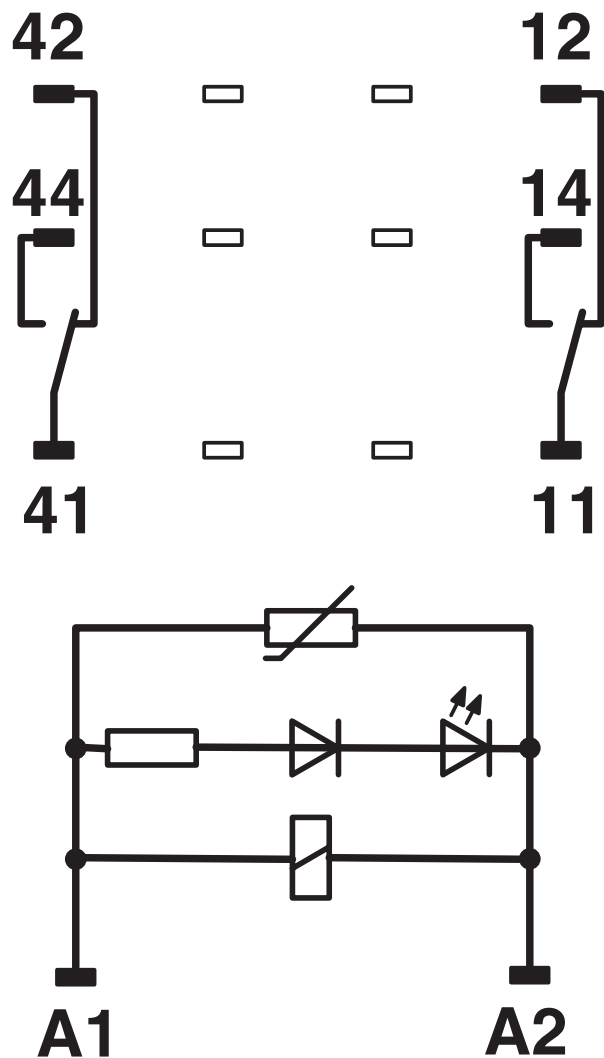

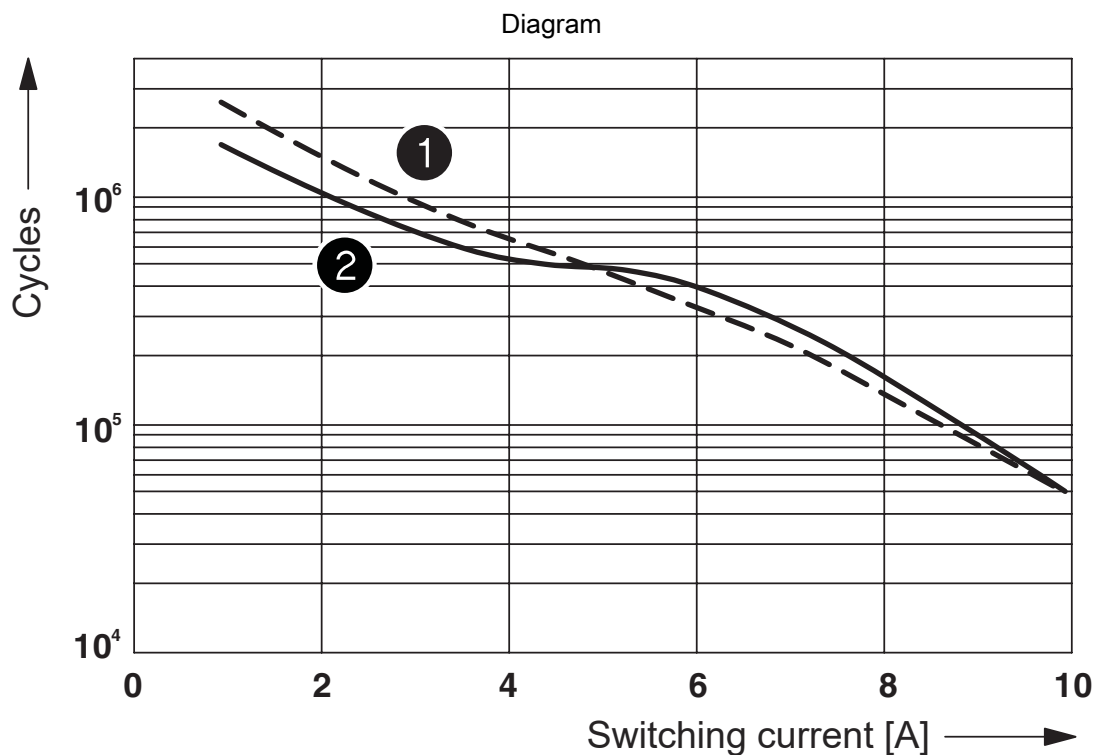

- ① 250 V AC, ohmic load
- ② 30 V DC, ohmic load

Electrical service life

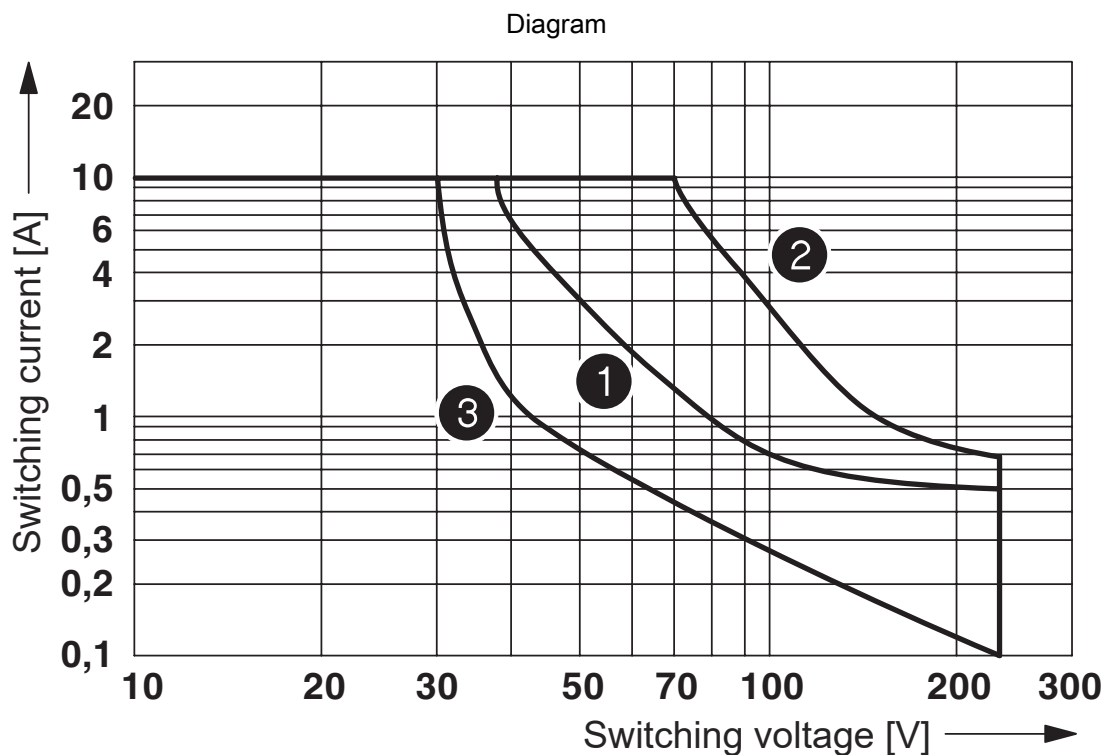

- ① Ohmic load
- ② ohmic load, contacts in series
- ③ L/R < 7 ms

DC interrupting rating

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

UNSPSC

UNSPSC 21.0	39122334
-------------	----------

PR2-RSC3-LV-230AC/2X21 - Relay Module



2834672

<https://www.phoenixcontact.com/pc/products/2834672>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com