

CTM ISDN - Surge protection plug



2838555

<https://www.phoenixcontact.com/pc/products/2838555>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



LSA-PLUS plug (COMTRAB CTM) with protective circuit for 1 conductor pair of an ISDN So interface.

Your advantages

- Space-saving due to compact design
- Flexible fields of application with modular protective plug
- Can be used in LSA-PLUS disconnect and control strips or CT-TERMIBLOCK via adapted connection technology

Commercial data

Item number	2838555
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	CL3211
Catalog page	Page 191 (C-4-2019)
GTIN	4017918819583
Weight per piece (including packing)	9.31 g
Weight per piece (excluding packing)	9.09 g
Customs tariff number	85363010
Country of origin	DE

CTM ISDN - Surge protection plug

2838555

<https://www.phoenixcontact.com/pc/products/2838555>



Technical data

Product properties

Product type	Surge protection for MCR technology
Product family	COMTRAB
IEC test classification	B2
	C2
	C3
	D1
	C1
VDE requirement class	B2
	C2
	C3
	D1
	C1
Type	LSA-PLUS module
Number of positions	2
Surge protection fault message	none
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.10
Wire pairs per module	1

Data management status

Article revision	06
------------------	----

Insulation characteristics

Overvoltage category	II
Pollution degree	2


Electrical properties

Nominal voltage U_N	6 V DC
-----------------------	--------

Connection data

Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
-------------------	---

Dimensions

Dimensional drawing	
Width	9.5 mm

CTM ISDN - Surge protection plug

2838555

<https://www.phoenixcontact.com/pc/products/2838555>



Height	21 mm
Depth	53.5 mm

Material specifications

Color	black (RAL 9005) Copper color
Flammability rating according to UL 94	V-0
Housing material	PA

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Line & Line-Earth Ground
Maximum continuous voltage U_C	± 6 V DC
Rated current	1.5 A (25 °C)
Residual current I_{PE}	≤ 2 μ A
Nominal discharge current I_n (8/20) μ s (line-line)	350 A
Nominal discharge current I_n (8/20) μ s (line-ground)	5 kA
Pulse discharge current I_{imp} (10/350) μ s (line-earth)	1 kA
Total discharge current I_{total} (8/20) μ s	10 kA
Total discharge current I_{total} (10/350) μ s	2.5 kA
Max. discharge current I_{max} (8/20) μ s maximum (line-earth)	10 kA (in total)
Nominal pulse current I_{an} (10/1000) μ s (line-line)	100 A 100 A
Output voltage limitation at 1 kV/ μ s (line-line) spike	≤ 60 V
Output voltage limitation at 1 kV/ μ s (line-earth) spike	≤ 700 V
Output voltage limitation at 1 kV/ μ s (line-line) static	≤ 15 V
Output voltage limitation at 1 kV/ μ s (line-earth) static	≤ 700 V
Residual voltage at I_n (conductor-conductor)	≤ 32 V
Residual voltage at I_n (conductor-ground)	≤ 55 V
Residual voltage with I_{an} (10/1000) μ s (line-line)	≤ 18 V
Residual voltage with I_{an} (10/1000) μ s (line-earth)	≤ 12 V
Voltage protection level U_p (line-line)	≤ 35 V (C1 - 700 V/350 A) ≤ 18 V (C3, 7.5 kV/100 A)
Voltage protection level U_p (line-earth)	≤ 700 V (C2 - 10 kV/5 kA, spike) ≤ 55 V (C2 - 10 kV/5 kA, static) ≤ 700 V (C3 - 7.5 kV / 100 A, spike) ≤ 12 V (C3 - 7.5 kV / 100 A, static)
Response time t_A (line-line)	≤ 500 ns
Response time t_A (line-earth)	≤ 100 ns
Input attenuation aE, sym.	0.3 dB (≤ 45 MHz)
Cut-off frequency f_g (3 dB), sym. in 100 Ω system	≥ 100 MHz

CTM ISDN - Surge protection plug



2838555

<https://www.phoenixcontact.com/pc/products/2838555>

Capacity (Core-Core)	25 pF (f=1 MHz / V _R = 0 V)
Surge protection fault message	none
Impulse durability (line-line)	C2 - 4 kV / 2 kA
	C3 - 100 A
	B2 - 4 kV / 100 A
Impulse durability (line-earth)	C2 - 4 kV / 2 kA
	C3 - 100 A
	B2 - 4 kV / 100 A
	D1 - 1 kA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 75 °C

Standards and regulations

VDE requirement class	B2
	C2
	C3
	D1
	C1

Air clearances and creepage distances

Standards/regulations	DIN VDE 0110-1 / IEC 60664-1
-----------------------	------------------------------

Standards Information technology specification

Standards/regulations	IEC 61643-21
	IEC 61643-21
Standards/specifications	IEC 61643-21
Note	2000

Mounting

Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
---------------	--

CTM ISDN - Surge protection plug


2838555

<https://www.phoenixcontact.com/pc/products/2838555>




Drawings

Dimensional drawing

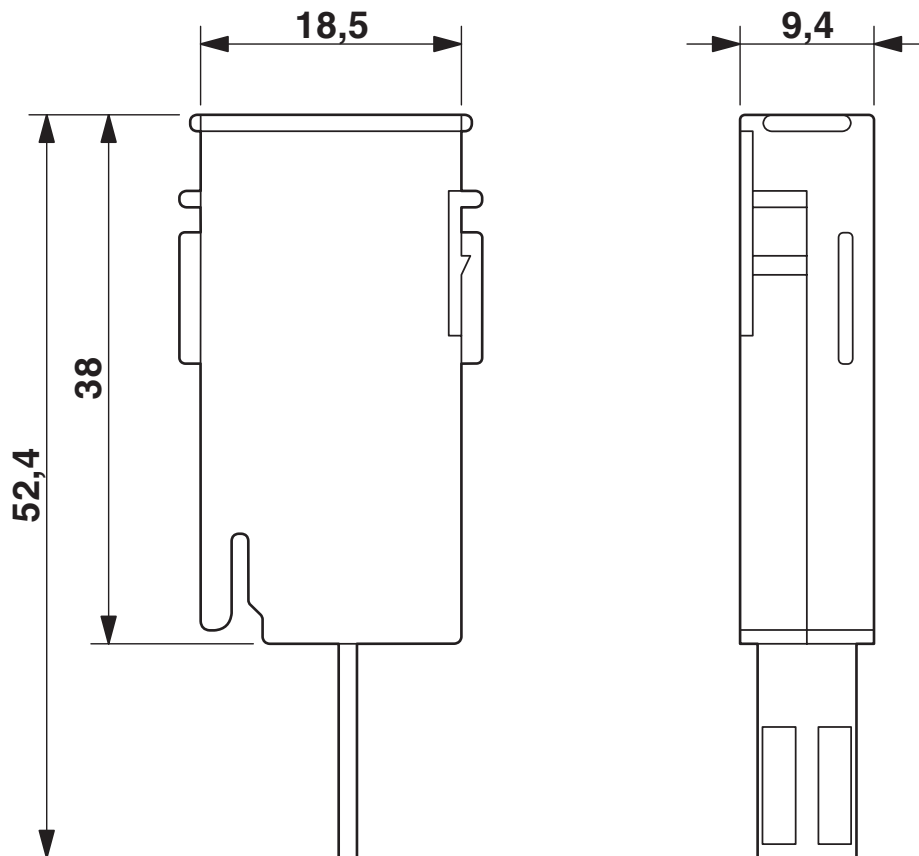

Circuit diagram

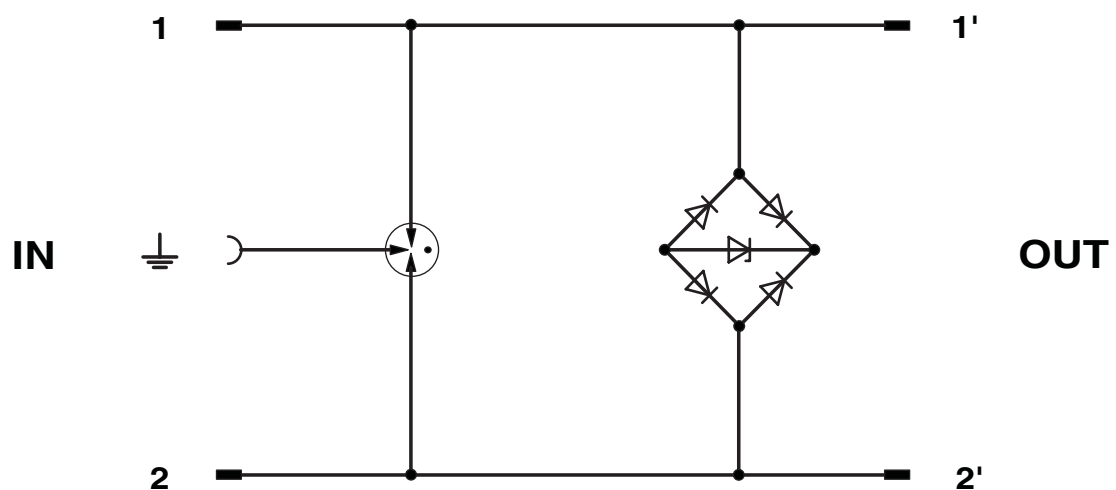

CTM ISDN - Surge protection plug

2838555

<https://www.phoenixcontact.com/pc/products/2838555>



Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2838555>



EAC

Approval ID: RU C-DE.*09.B.00169

CTM ISDN - Surge protection plug

2838555

<https://www.phoenixcontact.com/pc/products/2838555>



Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171503

ETIM

ETIM 9.0	EC000943
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

CTM ISDN - Surge protection plug

2838555

<https://www.phoenixcontact.com/pc/products/2838555>



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	697869e2-3339-44d4-aa1c-430dd21ebe65

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com