

IB IL 24 DI 2-PAC - Digital module



2861221
<https://www.phoenixcontact.com/it/products/2861221>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Digital input terminal, Digital inputs: 2, 24 V DC, connection technology: 4-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector and labeling field

Product description

The terminal is designed for use within an Inline station. It is used to acquire digital signals.

Your advantages

- Connections for 2 digital sensors
- Connection of sensors in 2-, 3-, and 4-conductor technology
- Maximum permissible load current per sensor: 250 mA
- Diagnostic and status indicators

Commercial data

Item number	2861221
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI
Product key	DRI131
Catalog page	Page 122 (C-6-2019)
GTIN	4017918894153
Weight per piece (including packing)	81.8 g
Weight per piece (excluding packing)	53 g
Customs tariff number	85389091
Country of origin	DE

IB IL 24 DI 2-PAC - Digital module


2861221

<https://www.phoenixcontact.com/it/products/2861221>



Technical data

Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Notes

Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

Interfaces

Inline local bus	
Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps

System properties

Module	
ID code (dec.)	190
ID code (hex)	BE
Length code (hex)	C2
Length code (dec)	194
Process data channel	2 bit
Input address area	2 bit
Output address area	0 Byte
Register length	2 bit
Required parameter data	1 Byte
Required configuration data	4 Byte

Input data

Digital	
Input name	Digital inputs
Description of the input	EN 61131-2 type 1

IB IL 24 DI 2-PAC - Digital module



2861221

<https://www.phoenixcontact.com/it/products/2861221>

Number of inputs	2
Connection method	Spring-cage connection
Connection technology	4-conductor
Input voltage	24 V DC
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	15 V DC ... 30 V DC
Nominal input voltage U_{IN}	24 V DC
Nominal input current at U_{IN}	min. 5 mA (at nominal voltage)
Sensor current per channel	max. 250 mA
Typical response time	< 1 ms
Protective circuit	Short-circuit and overload protection

Product properties

Type	modular
Product type	I/O component
Product family	Inline
Scope of delivery	including Inline connector and labeling field
No. of channels	2

Electrical properties

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 35 mA

Potentials: Segment circuit supply (U_S)

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 0.5 A
	0 A

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²

IB IL 24 DI 2-PAC - Digital module



2861221

<https://www.phoenixcontact.com/it/products/2861221>

Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

IB IL 24 DI 2-PAC - Digital module

2861221

<https://www.phoenixcontact.com/it/products/2861221>




Drawings

Dimensional drawing



Connection diagram

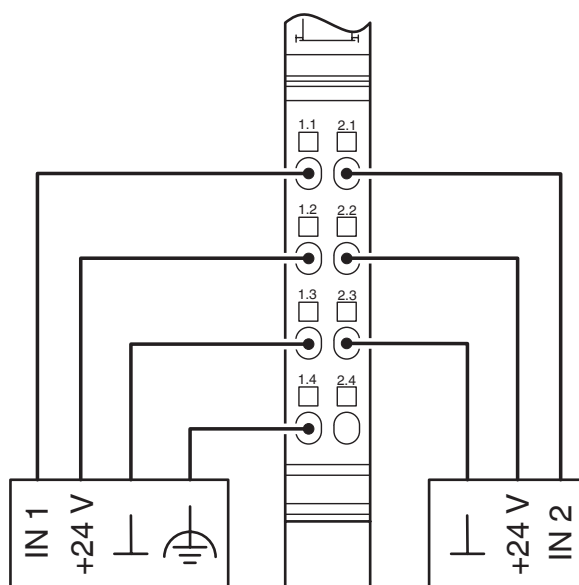


IB IL 24 DI 2-PAC - Digital module

2861221

<https://www.phoenixcontact.com/it/products/2861221>



Block diagram

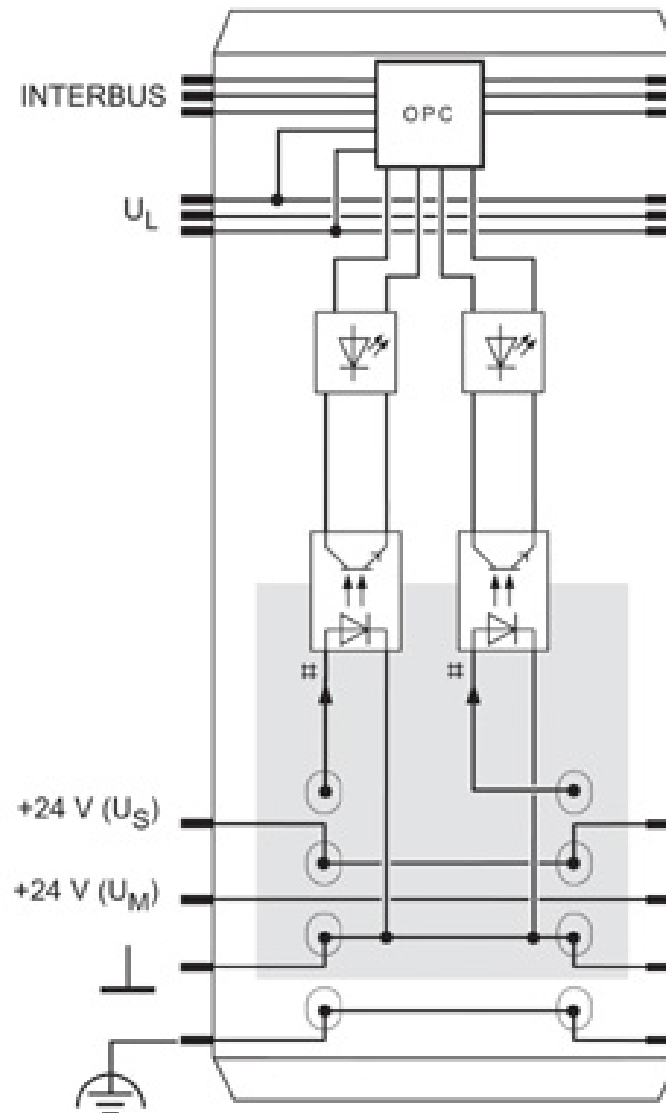

IB IL 24 DI 2-PAC - Digital module



2861221

<https://www.phoenixcontact.com/it/products/2861221>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/2861221>

	UL Recognized Approval ID: FILE E 140324
	EAC Approval ID: TR TS_D_01921-19
	DNV GL Approval ID: TAA00000BN
	BV Approval ID: 20977/C0 BV
	RINA Approval ID: ELE121121XG
	ABS Approval ID: 22-2226444-PDA
	UAE-RoHS Approval ID: 22-04-13090
	cUL Listed Approval ID: FILE E 199827
	UL Listed Approval ID: FILE E 199827
	cULus Listed

IB IL 24 DI 2-PAC - Digital module



2861221

<https://www.phoenixcontact.com/it/products/2861221>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 9.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL 24 DI 2-PAC - Digital module



2861221
<https://www.phoenixcontact.com/lt/products/2861221>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com