

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ex i solenoid driver. For the intrinsically safe control of Ex i solenoid valves, alarm modules or LEDs installed in the Ex area. Current limitation at 48 mA. For gases up to Group IIC, loop-powered, electrical isolation, SIL 3. Screw connection.

Your advantages

- Mechanically compatible with the DIN rail connector
- Various output characteristic curves compatible with standard solenoid valves
- Loop-powered: the required power is supplied via the control signal on the input side.
- Installation in zone 2, protection type "n" (EN 60079-15) permitted
- Up to SIL 3 in accordance with IEC 61508
- 2-way electrical isolation
- Input: 19.2 V DC ... 30 V DC
- Output: [Ex ia] IIC/[Ex ia] IIB

Commercial data

Item number	2865609
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK3142
Product key	CK3142
Catalog page	Page 167 (C-5-2019)
GTIN	4046356158411
Weight per piece (including packing)	175.93 g
Weight per piece (excluding packing)	113.7 g
Customs tariff number	85437090
Country of origin	DE

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Solenoid driver
Product family	MACX Analog
No. of channels	1
Type	Ex i signal conditioners with SIL functional safety
Compatible valve	ASCO Coil 195 ASCO Coil 302 (12 V) Bürkert Coil AC 10 standard Bürkert Coil AC 10 high resistance Bürkert Coil AC 21 standard 700 mW / 65°C Bürkert Coil AC 21 high resistance 700 mW / 65°C Bürkert Coil AC 21 standard 900 mW / 45°C Bürkert Coil AC 21 high resistance 900 mW / 45°C Bürkert Coil AC 21 standard 900 mW / 60°C Bürkert Coil AC 21 high resistance 900 mW / 60°C Bürkert Coil G1 642735 standard 800 mW / 40°C Bürkert Coil G1 642735 high resistance 800 mW / 40°C Bürkert Coil G1 642735 standard 1000 mW / 40°C Bürkert Coil G1 642735 high resistance 1000 mW / 40°C FESTO Coil MFH-...IA-SA-EX GBXE022AIAD03 FESTO Coil (J)MFH-...BIA-SA-EX GBXE022AIAD03 Norgren Herion Coil 2050 Norgren Herion Coil 2051 Norgren Herion Coil 2052 Norgren Herion Coil 2053 Norgren Herion Coil 2080 / 2082 Norgren Herion Coil 2081 / 2083 Norgren Herion Coil 2084 Norgren Herion Coil 3039 Nass Coil 1259 30.1-00 Nass Coil 1259 50.1-00 Parker Coil VZ07 488650.01 Parker Coil VZ33 494035.10 Parker Coil VZ08 488660.01 Parker Coil VZ09 488670.01 Parker Coil VZ95 482160.01 EEx ia IIB T6

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

	Parker Coil VZ23 482870.01
	Samson Coil 3701-12 (12 V)
	Samson Coil 3701-13 (24 V)
	Samson Coil 3963-12 (12 V)
	Samson Coil 3963-13 (24 V)
	Samson Coil 3964-12 (12 V)
	Samson Coil 3964-13 (24 V)
	Seitz Pilot valve PV 12F73 Ci oH
	Seitz Pilot valve PV 12F73 Xi oH
	Seitz Pilot valve PV 12F73 Xi oH-2
Note	Seitz Solenoid coil 11 G 52
	This is an extract of possible combinations of valves and solenoid drivers.

Electrical properties

Electrical isolation	2-way isolation
Maximum temperature coefficient	0.01 %/K

Electrical isolation

Test voltage	2.5 kV AC (50 Hz, 60 s)
Overvoltage category	II
Pollution degree	2

Electrical isolation Output/input IEC/EN 60079-11

Standards/regulations	IEC/EN 60079-11
Rated insulation voltage	375 V _{PP}

Electrical isolation Output/input IEC/EN 61010-1

Standards/regulations	IEC/EN 61010-1
Rated insulation voltage	300 V _{rms}
Insulation	Safe isolation

Supply

Supply voltage range	loop-powered, no external supply necessary
Power dissipation	< 1.41 W

Input data

Signal: Voltage

Number of inputs	1
Voltage input signal	19.2 V DC ... 30 V DC (24 V DC, -20 % ... +25 %)
Max. current input signal	85 mA (U _e = 24 V DC)

Output data

Signal: Voltage

Output description	intrinsically safe
--------------------	--------------------

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Number of outputs	1
Output voltage	10.5 V DC (48 mA)
Output resistor	275.7 Ω (Internal resistance R_i)
Current limitation	48 mA
Response time	20 ms
Non-load voltage	24 V DC
Short-circuit-proof	yes

Connection data

Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm

Test socket

Max. diameter	2 mm
---------------	------

Ex data

Ex installation (EPL)	Gc
	Div. 2
Ex i circuits (EPL)	Ga
	Da
	Ma
	Div. 1

Safety data

Max. internal inductance L_i	negligible
Max. internal capacitance C_i	negligible
Max. output voltage U_o	27.7 V
Max. output current I_o	101 mA
Max. output power P_o	697 mW
Safety-related maximum voltage U_m	253 V AC
	125 V DC
IIB/IIIC (simple circuit): Max. external inductivity L_o / Max. external capacitance C_o	17 mH / 0.663 μ F
IIC (simple circuit): Max. external inductivity L_o / Max. external capacitance C_o	4 mH / 0.085 μ F
IIB/IIIC (mixed circuit): Max. external inductivity L_o / Max. external capacitance C_o	10 mH / 250 nF, 5 mH / 250 nF, 1 mH / 350 nF, 0.1 mH / 663 nF
IIC (mixed circuit): Max. external inductivity L_o / Max. external capacitance C_o	20 mH / 68 nF, 10 mH / 68 nF, 5 mH / 68 nF, 1 mH / 79 nF, 0.1 mH / 108 nF

Signaling

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver




2865609

<https://www.phoenixcontact.com/au/products/2865609>

Status display	Yellow LED (switching state / status, lights up when output circuit is active)
----------------	--

Dimensions

Dimensional drawing	
Width	12.5 mm
Height	112.5 mm
Depth	113.7 mm
Depth NS 35/7,5	114.5 mm (Snapped onto DIN rail NS 35/7,5 in accordance with EN 60715)

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0 (Housing)
Housing material	PA 6.6-FR

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (not assessed by UL)
Ambient temperature (operation)	-40 °C ... 60 °C (Any mounting position)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	10 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
Note	and EN 61326

ATEX

Identification	 II (1) G [Ex ia Ga] IIC/IIB/IIA
	 II (1) D [Ex ia Da] IIIC
	 II 3 (1)G Ex nA [ia IIC Ga] IIC T4 Gc X
Certificate	IBExU 07 ATEX 1133X

UKCA Ex (UKEX)

Identification	 I (M1) [Ex ia Ma] I
	 II (1) G [Ex ia Ga] IIC
	 II (1) D [Ex ia Da] IIIC

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

	II 3 (1) Ex ec [ia Ga] IIC T4 Gc
Certificate	CML 22UKEX3526X
IECEX	
Identification	[Ex ia Ga] IIC/IIB/IIA
	[Ex ia Da] IIIC
	Ex nA [ia IIC Ga] IIC T4 Gc
Certificate	IECEX IBE 08.0002X
CCC / China-Ex	
Identification	[Ex ia Ga] IIC
	[Ex iaD]
	Ex nA [ia Ga] IIC T4 Gc
Certificate	NEPSI GYJ20.1316X
UL, USA/Canada	
Identification	UL 61010 Listed
	Class I, Div. 2, Groups A, B, C, D T4
	Class I, Div. 2, Groups IIC, IIB, IIA T4
	Associated apparatus for use in Class I, Division 1, Groups A,B,C,D
	Associated apparatus for use in Class II, Div.1 Groups E,F,G
	Associated apparatus for use in Class III, Division 1
	Associated apparatus for use in Class I, Zone 0,1,2, Groups IIC,IIB,IIA
Certificate	UL C.D.-No 83104549
UL, USA/Canada	
Identification	Class I Div 2; IS for Class I, II, III Div 1
Certificate	UL C.D.-No 83104549
Shipbuilding approval	
Certificate	DNV GL TAA000020C
Safety Integrity Level (SIL, IEC 61508)	
Identification	3
INMETRO	
Identification	[Ex ia Ga] IIB/IIA
	[Ex ia Da] IIIC
	Ex nA [ia IIB Ga] IIC T4 Gc
Certificate	DNV 18.0115 X
EAC Ex	
Identification	Ex [Ex ia Ga] IIC
	Ex [Ex ia Da] IIIC
Certificate	RU C-DE.AB72.B.00093/19
DNV GL data	

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Temperature	B
Humidity	B
Vibration	A
EMC	A
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Noise immunity	EN 61000-6-2
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4

Standards and regulations

Electrical isolation	2-way isolation
----------------------	-----------------

GB Standard


Standards/regulations	GB 3836.1
	GB 3836.4
	GB 3836.8
	GB 3626.20
	GB 12476.1
	GB 12476.4

Mounting


Mounting type	DIN rail mounting
---------------	-------------------

Drawings


Diagram

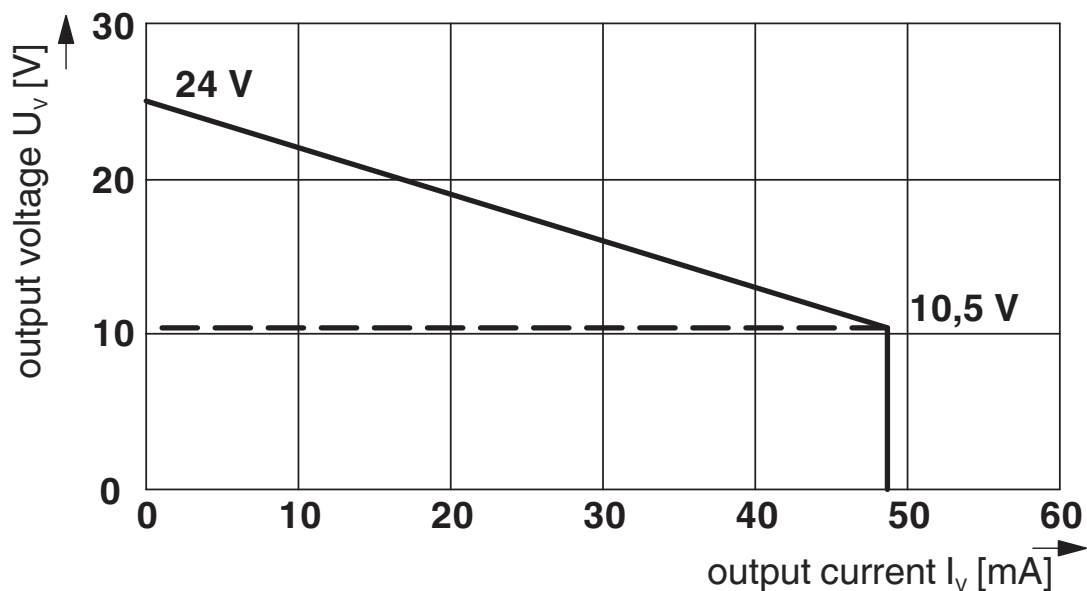

Dimensional drawing

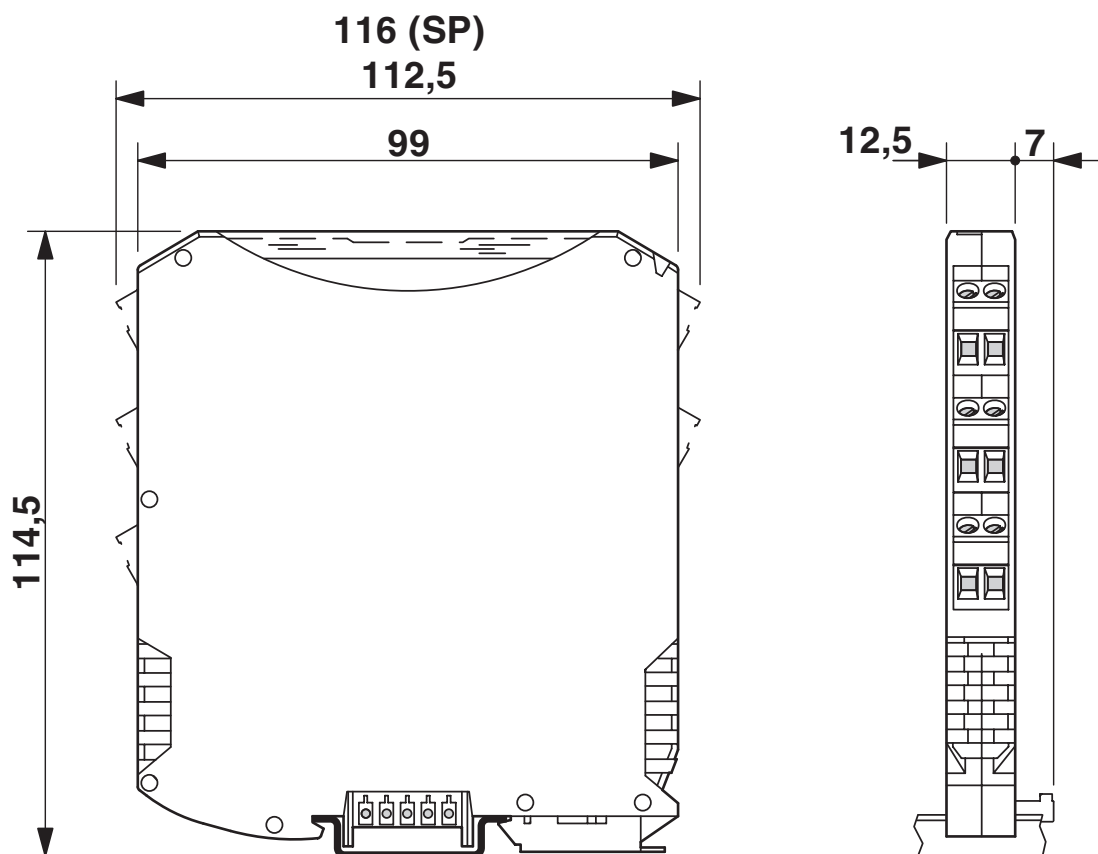

Block diagram

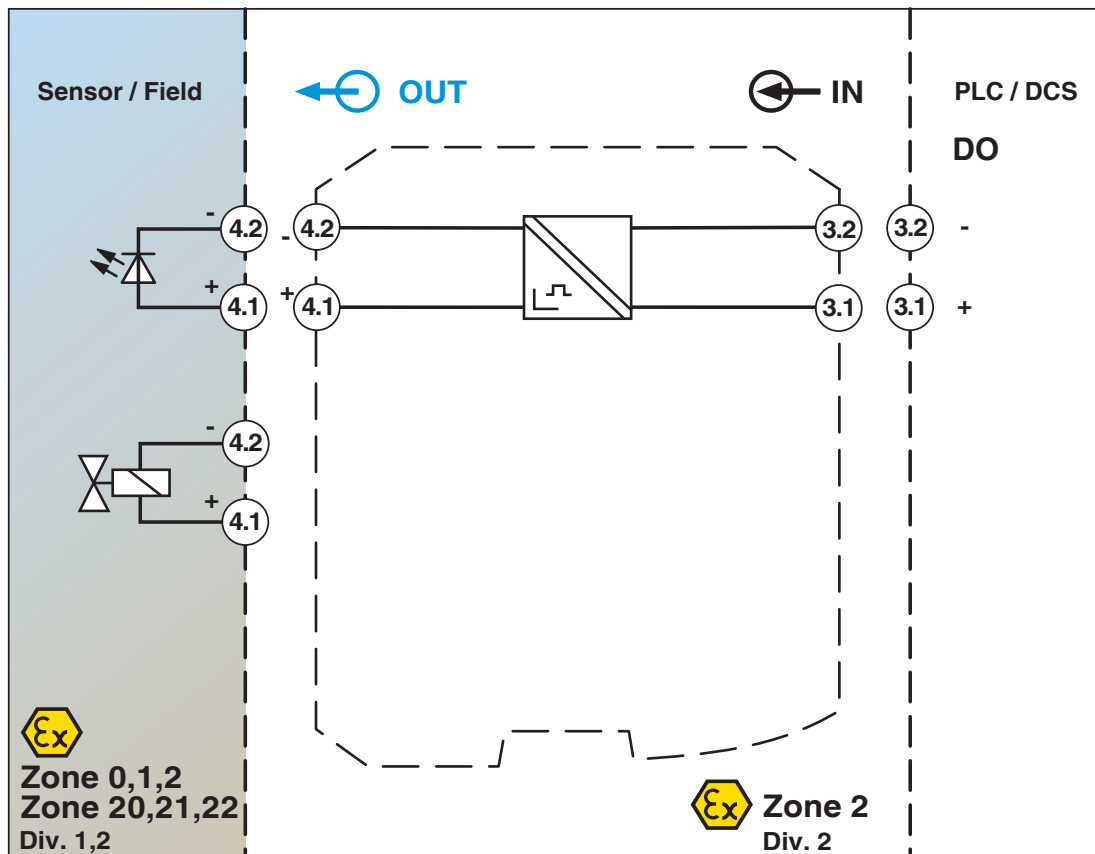

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2865609>



DNV GL

Approval ID: TAA000020C



UL Listed

Approval ID: FILE E 330267



CCC

Approval ID: 2020322 316001457



cUL Listed

Approval ID: FILE E 330267

Functional Safety

Approval ID: 16/04-017 R025 V1R1



EAC Ex

Approval ID: RU C-DE.AB72.B.00093



IECEx

Approval ID: IECEx IBE 08.0002X



cUL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827



ATEX

Approval ID: IBExU 07 ATEX 1133 X

INMETRO

Approval ID: DNV 18.0115 X

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

cULus Listed

cULus Listed

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Classifications

ECLASS

ECLASS-11.0	27210120
ECLASS-12.0	27210120
ECLASS-13.0	27210120

ETIM

ETIM 9.0	EC002653
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

MACX MCR-EX-SL-SD-24-48-LP - Solenoid driver



2865609

<https://www.phoenixcontact.com/au/products/2865609>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au