

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Programmable temperature transducer with analog output and 3 limit value relays, intrinsically safe signal input, resistance thermometer in 2-, 3-, or 4-conductor technology, thermocouples, electrical isolation, wide-range power supply, screw connection, SIL, PL.

## Your advantages

- Input for resistance thermometers, thermocouples, resistance-type sensors, potentiometers, and mV sources, [Ex ia] IIC
- Programming during operation with Ex measuring circuit connected and also voltage-free using IFS-USB-PROG-ADAPTER programming adapter
- Cold junction compensation with separate plug
- Configuration via software (FDT/DTM) or IFS-OP-UNIT operator interface and display unit
- Up to SIL 2 in accordance with EN 61508
- Installation in zone 2, protection type "n" (EN 60079-15) permitted
- Status indicator for supply voltage, cable, sensor, and module errors
- Freely programmable input and output
- Inverse output signal ranges as an option
- Three limit value relays, can be used in combination as a safe limit value relay
- Plug-in screw or spring-cage connection technology (Push-in technology)
- Wide-range power supply of 19.2 ... 253 V AC/DC
- Measure differential temperatures

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2865751             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | C430                |
| Product key                          | CK3121              |
| Catalog page                         | Page 152 (C-5-2019) |
| GTIN                                 | 4046356288781       |
| Weight per piece (including packing) | 365.9 g             |
| Weight per piece (excluding packing) | 200 g               |
| Customs tariff number                | 85437090            |
| Country of origin                    | DE                  |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

## Technical data

### Notes

#### Utilization restriction

|          |                                                                           |
|----------|---------------------------------------------------------------------------|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---------------------------------------------------------------------------|

### Product properties

|                |                                                            |
|----------------|------------------------------------------------------------|
| Product type   | Temperature transmitter                                    |
| Product family | MACX Analog                                                |
| Type           | Ex i signal conditioners with SIL and PL Functional Safety |
| Configuration  | DIP switches<br>Software                                   |

#### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Pollution degree     | 2  |

### Electrical properties

|                                 |                                                  |
|---------------------------------|--------------------------------------------------|
| Electrical isolation            | 4-way isolation                                  |
| Step response (0–99%)           | ≤ 1.75 s (SIL on)<br>1.3 s (SIL off)             |
| Maximum temperature coefficient | 0.01 %/K                                         |
| Maximum transmission error      | 0.1 % (e.g. for Pt 100, 300 K span, 4 ... 20 mA) |

#### Electrical isolation Input/output/power supply

|              |                         |
|--------------|-------------------------|
| Test voltage | 2.5 kV AC (50 Hz, 60 s) |
|--------------|-------------------------|

#### Electrical isolation Input/output

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Electrical isolation | 375 V (Peak value in accordance with IEC/EN 60079-11) |
|----------------------|-------------------------------------------------------|

#### Electrical isolation Input/power supply

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Electrical isolation | 375 V (Peak value in accordance with IEC/EN 60079-11) |
|----------------------|-------------------------------------------------------|

#### Electrical isolation Input/switching output

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Electrical isolation | 375 V (Peak value in accordance with IEC/EN 60079-11) |
|----------------------|-------------------------------------------------------|

#### Electrical isolation Output/supply

|                          |                                                  |
|--------------------------|--------------------------------------------------|
| Rated insulation voltage | 300 V <sub>rms</sub>                             |
| Insulation               | Safe isolation in accordance with IEC/EN 61010-1 |

#### Supply

|                              |                                                                                       |
|------------------------------|---------------------------------------------------------------------------------------|
| Nominal supply voltage range | 24 V AC/DC ... 230 V AC/DC (50/60 Hz)                                                 |
| Supply voltage range         | 19.2 V AC/DC ... 253 V AC/DC (24 V AC/DC ... 230 V AC/DC (-20 % ... +10 %, 50/60 Hz)) |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

|                             |                    |
|-----------------------------|--------------------|
| Typical current consumption | < 100 mA (24 V DC) |
| Power consumption           | < 2.4 W            |

## Input data

### Signal

|                  |             |
|------------------|-------------|
| Number of inputs | 1           |
| Input signal     | Temperature |
|                  | Resistor    |
|                  | Voltage     |

### Measurement

|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Sensor types (RTD) that can be used | Pt, Ni, Cu sensors: 2, 3, 4-wire                            |
| Sensor types that can be used (TC)  | B, E, J, K, N, R, S, T, L, U, CA, DA, A1G, A2G, A3G, MG, LG |
| Temperature measuring range         | -250 °C ... 2500 °C (Range depending on the sensor type)    |
| Linear resistance measuring range   | 0 Ω ... 50 kΩ                                               |
| Potentiometer resistance range      | 0 Ω ... 50 kΩ                                               |
| Linear mV signal range              | -1000 mV ... 1000 mV                                        |

## Output data

### Switching: Relay

|                           |                                       |
|---------------------------|---------------------------------------|
| Configurable/programmable | Yes                                   |
| Contact switching type    | 3 changeover contacts                 |
| Contact material          | AgSnO <sub>2</sub> , hard gold-plated |
| Maximum switching voltage | 250 V AC (250 V DC)                   |
| Max. switching current    | 2 A (250 V AC)                        |
|                           | 0.1 A (250 V DC)                      |
|                           | 2 A (28 V DC)                         |

### Signal: Current

|                                         |                                                                             |
|-----------------------------------------|-----------------------------------------------------------------------------|
| Number of outputs                       | 1                                                                           |
| Configurable/programmable               | Yes                                                                         |
| Max. voltage output signal              | ± 11 V                                                                      |
| Current output signal                   | 4 mA ... 20 mA (in the case of SIL; further free configuration without SIL) |
| Max. current output signal              | 22 mA                                                                       |
| Load/output load voltage output         | ≥ 10 kΩ                                                                     |
| Load/output load current output         | ≤ 600 Ω (20 mA)                                                             |
| Behavior in the event of a sensor error | according to NE 43 or freely configurable                                   |

## Connection data

|                   |                  |
|-------------------|------------------|
| Connection method | Screw connection |
| Stripping length  | 7 mm             |
| Screw thread      | M3               |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 14                                   |
| Tightening torque                | 0.5 Nm ... 0.6 Nm                           |

## Test socket

|               |      |
|---------------|------|
| Max. diameter | 2 mm |
|---------------|------|

## Ex data

|                       |        |
|-----------------------|--------|
| Ex installation (EPL) | Gc     |
|                       | Div. 2 |
| Ex i circuits (EPL)   | Ga     |
|                       | Da     |
|                       | Ma     |
|                       | Div. 1 |

## Safety data

|                                                                                                 |                                                     |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Max. internal inductance $L_i$                                                                  | negligible                                          |
| Max. internal capacitance $C_i$                                                                 | 44 nF                                               |
| Max. output voltage $U_o$                                                                       | 6 V DC                                              |
| Max. output current $I_o$                                                                       | 7 mA (RTD in 2-conductor technology)                |
|                                                                                                 | 13 mA (RTD in 3-conductor technology)               |
|                                                                                                 | 16 mA (RTD in 4-conductor technology)               |
|                                                                                                 | 13 mA (TC with internal cold junction compensation) |
|                                                                                                 | 10 mA (TC with external cold junction compensation) |
|                                                                                                 | 5 mA (mV)                                           |
|                                                                                                 | 13 mA (Potentiometer)                               |
| Max. output power $P_o$                                                                         | 11 mW (RTD in 2-conductor technology)               |
|                                                                                                 | 20 mW (RTD in 3-conductor technology)               |
|                                                                                                 | 24 mW (RTD in 4-conductor technology)               |
|                                                                                                 | 20 mW (TC with internal cold junction compensation) |
|                                                                                                 | 15 mW (TC with external cold junction compensation) |
|                                                                                                 | 7.5 mW (mV)                                         |
|                                                                                                 | 20 mW (Potentiometer)                               |
| Safety-related maximum voltage $U_m$                                                            | 253 V AC (Terminals 1.1, 1.2)                       |
|                                                                                                 | 125 V DC (Terminals 1.1, 1.2)                       |
|                                                                                                 | 250 V AC (Terminals 3.1, 3.2)                       |
|                                                                                                 | 120 V DC (Terminals 3.1, 3.2)                       |
|                                                                                                 | 30 V (Installation in zone 2)                       |
| IIC (mixed circuit): Max. external inductivity $L_o$ / Max. external capacitance $C_o$          | 100 mH / 600 nF                                     |
| IIB/IIA/IIIC (mixed circuit): Max. external inductivity $L_o$ / Max. external capacitance $C_o$ | 100 mH / 1 $\mu$ F                                  |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

## Signaling

|                |                                             |
|----------------|---------------------------------------------|
| Status display | Green LED (supply voltage)                  |
|                | Red LED, flashing (line, sensor error, ERR) |
|                | Red LED (module error, ERR)                 |
|                | Yellow LED (switching output)               |

## Dimensions

|                 |                                                                        |
|-----------------|------------------------------------------------------------------------|
| Width           | 35 mm                                                                  |
| Height          | 112.5 mm                                                               |
| Depth           | 113.7 mm                                                               |
| Depth NS 35/7,5 | 114.5 mm (Snapped onto DIN rail NS 35/7,5 in accordance with EN 60715) |

## Material specifications

|                                        |                 |
|----------------------------------------|-----------------|
| Color                                  | gray (RAL 7042) |
| Flammability rating according to UL 94 | V0 (Housing)    |
| Housing material                       | PA 6.6-FR       |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                    |
|-----------------------------------------|------------------------------------|
| Degree of protection                    | IP20 (not assessed by UL)          |
| Ambient temperature (operation)         | -20 °C ... 65 °C                   |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                   |
| Permissible humidity (operation)        | typ. 5 % ... 95 % (non-condensing) |
| Shock (operation)                       | 15g (IEC 60068-2-27)               |
| Vibration (operation)                   | 5g (IEC 60068-2-6)                 |

### Altitude range ( $\leq 2000$ m)

|          |                                                                                                                                                                   |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Altitude | $\leq 2000$ m (The technical data refers to altitudes $\leq 2000$ m above mean sea level. For altitudes $>2000$ m above mean sea level, refer to the data sheet.) |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Altitude range ( $\leq 3000$ m)

|                                      |                               |
|--------------------------------------|-------------------------------|
| Height range                         | $> 2000$ m ... $3000$ m       |
| Ambient temperature (operation)      | -20 °C ... 55 °C              |
| Safety-related maximum voltage $U_m$ | 190 V AC (Terminals 1.1, 1.2) |
|                                      | 110 V DC (Terminals 1.1, 1.2) |
|                                      | 190 V AC (Terminals 3.1, 3.2) |
|                                      | 110 V DC (Terminals 3.1, 3.2) |
|                                      | 30 V (Installation in zone 2) |

### Altitude range ( $\leq 4000$ m)

|                                 |                         |
|---------------------------------|-------------------------|
| Height range                    | $> 3000$ m ... $4000$ m |
| Ambient temperature (operation) | -20 °C ... 50 °C        |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

|                                      |                                 |
|--------------------------------------|---------------------------------|
| Safety-related maximum voltage $U_m$ | 60 V AC/DC (Terminals 1.1, 1.2) |
|                                      | 60 V AC/DC (Terminals 3.1, 3.2) |
|                                      | 30 V (Installation in zone 2)   |
| Altitude range ( $\leq 5000$ m)      |                                 |
| Height range                         | > 4000 m ... 5000 m             |
| Ambient temperature (operation)      | -20 °C ... 45 °C                |
| Safety-related maximum voltage $U_m$ | 60 V AC/DC (Terminals 1.1, 1.2) |
|                                      | 60 V AC/DC (Terminals 3.1, 3.2) |
|                                      | 30 V (Installation in zone 2)   |

## Approvals

### CE

|             |              |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

### ATEX

|                |                                        |
|----------------|----------------------------------------|
| Identification | ⊕ II (1) G [Ex ia Ga] IIC              |
|                | ⊕ II (1) D [Ex ia Da] IIIC             |
|                | ⊕ II 3 G Ex ec ic nC [ia Ga] IIC T4 Gc |
|                | ⊕ I (M1) [Ex ia Ma] I                  |
| Certificate    | IBExU 10 ATEX 1044                     |

### UKCA Ex (UKEX)

|                |                                            |
|----------------|--------------------------------------------|
| Identification | ⊕ I (M1) [Ex ia Ma] I                      |
|                | ⊕ II (1) G [Ex ia Ga] IIC                  |
|                | ⊕ II (1) D [Ex ia Da] IIIC                 |
|                | ⊕ II 3 (1) G Ex ec ic nC [ia Ga] IIC T4 Gc |
| Certificate    | CML 22UKEX3529X                            |

### IECEX

|                |                               |
|----------------|-------------------------------|
| Identification | [Ex ia Ga] IIC                |
|                | [Ex ia Da] IIIC               |
|                | Ex ec ic nC [ia Ga] IIC T4 Gc |
|                | [Ex ia Ma] I                  |
| Certificate    | IECEX IBE 10.0004 X           |

### UL, USA/Canada

|                |                    |
|----------------|--------------------|
| Identification | UL 508 Listed      |
| Certificate    | Ⓢ C.D.-No 83104549 |

### Shipbuilding approval

|             |                   |
|-------------|-------------------|
| Certificate | DNV GL TAA000020C |
|-------------|-------------------|

### Safety Integrity Level (SIL, IEC 61508)

|                |   |
|----------------|---|
| Identification | 2 |
|----------------|---|

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

|             |                    |
|-------------|--------------------|
| Certificate | SEBS-A.150520/17TB |
|-------------|--------------------|

## Performance Level (ISO 13849)

|                |   |
|----------------|---|
| Identification | d |
|----------------|---|

## INMETRO

|                |                               |
|----------------|-------------------------------|
| Identification | [Ex ia Ga] IIC                |
|                | [Ex ia Da] IIIC               |
|                | Ex ec ic nC [ia Ga] IIC T4 Gc |
|                | [Ex ia Ma] I                  |
| Certificate    | DNV 18.0143 X                 |

## EAC Ex

|                |                         |
|----------------|-------------------------|
| Identification | Ex [Ex ia Ga] IIC       |
|                | Ex [Ex ia Da] IIIC      |
| Certificate    | RU C-DE.AB72.B.00093/19 |

## DNV GL data

|             |                                                                                         |
|-------------|-----------------------------------------------------------------------------------------|
| Temperature | B                                                                                       |
| Humidity    | B                                                                                       |
| Vibration   | A                                                                                       |
| EMC         | A                                                                                       |
| Enclosure   | Required protection according to the Rules shall be provided upon installation on board |

## EMC data

|                               |                                                                      |
|-------------------------------|----------------------------------------------------------------------|
| Noise immunity                | EN 61000-6-2                                                         |
| Note                          | When being exposed to interference, there may be minimal deviations. |
| Electromagnetic compatibility | Conformance with EMC directive                                       |
| Noise emission                | EN 61000-6-4                                                         |

## Electromagnetic HF field

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Designation                                            | Electromagnetic RF field |
| Standards/regulations                                  | EN 61000-4-3             |
| Typical deviation from the measuring range final value | 2 %                      |

## Fast transients (burst)

|                                                        |                         |
|--------------------------------------------------------|-------------------------|
| Designation                                            | Fast transients (burst) |
| Standards/regulations                                  | EN 61000-4-4            |
| Typical deviation from the measuring range final value | 2 %                     |

## Conducted interference

|                                                        |                         |
|--------------------------------------------------------|-------------------------|
| Designation                                            | Conducted interferences |
| Standards/regulations                                  | EN 61000-4-6            |
| Typical deviation from the measuring range final value | 2 %                     |

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

## Standards and regulations

|                      |                 |
|----------------------|-----------------|
| Electrical isolation | 4-way isolation |
|----------------------|-----------------|

## Mounting

|               |                   |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|


# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer

2865751

<https://www.phoenixcontact.com/us/products/2865751>

## Drawings

Block diagram

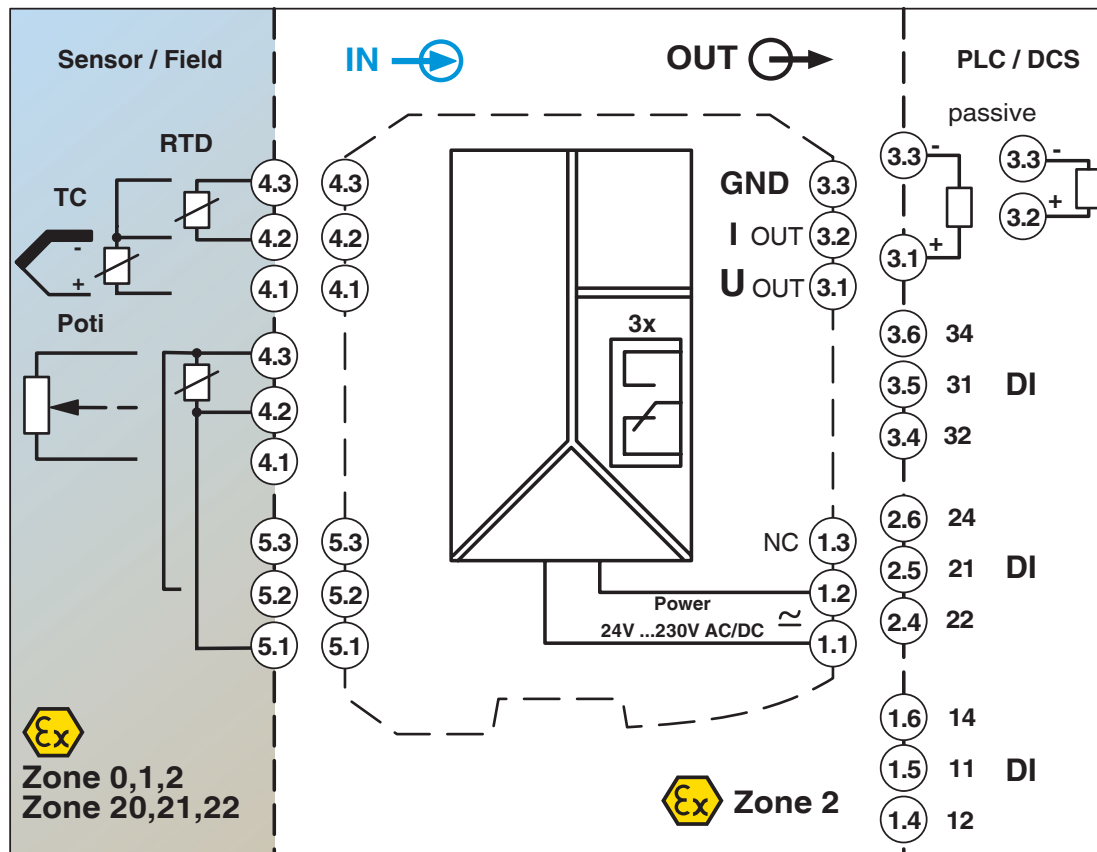

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2865751>



### DNV GL

Approval ID: TAA000020C



### UL Listed

Approval ID: FILE E 238705



### cUL Listed

Approval ID: FILE E 238705



### Functional Safety

Approval ID: SEBS-A.150520/17 V1

### Functional Safety

Approval ID: 09/11-04 R013 V1R0

### Functional Safety

Approval ID: 100134C P0019 C001



### EAC Ex

Approval ID: RU C-DE.AB72.B.00093



### IECEx

Approval ID: IECEx IBE 10.0004X



### cUL Listed

Approval ID: FILE E 199827



### UL Listed

Approval ID: FILE E 199827



### ATEX

Approval ID: IBExU 10 ATEX 1044

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751

<https://www.phoenixcontact.com/us/products/2865751>

**INMETRO**  
Approval ID: DNV 18.0143 X

**cULus Listed**

**cULus Listed**

# MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751  
<https://www.phoenixcontact.com/us/products/2865751>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27210129 |
| ECLASS-12.0 | 27210129 |
| ECLASS-13.0 | 27210129 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002919 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 41112100 |
|-------------|----------|

MACX MCR-EX-T-UIREL-UP - Temperature measuring transducer



2865751  
<https://www.phoenixcontact.com/us/products/2865751>

Environmental product compliance

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                               |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                               |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)