

2867089

https://www.phoenixcontact.com/us/products/2867089

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bidirectional, wireless, 900 MHz transmission system (America), made up of 2 transceivers (transmitter and receiver)

Your advantages

- · Frequency hopping spread spectrum
- The integrated bus foot enables connection to additional I/O modules
- Each transceiver has 1 analog input (4 ... 20 mA) and 2 digital inputs (5 ... 30 V AC/DC), as well as 1 analog output and 2 digital outputs, for direct connection to compatible sensors and actuators and for data transmission in both directions
- · Status of the wireless connection via a relay (RF link)
- Individual transceivers are listed under Class I, Division 2
- Operates in the license-free 902 MHz ... 928 MHz ISM band
- Two omnidirectional antennas (optional)
- · Additional transceivers can be added to configure repeater systems
- Two pre-programmed transceivers that automatically communicate with each other
- · No additional parameterization or programming required

Commercial data

Item number	2867089
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	NULL
Product key	DNC651
Catalog page	Page 665 (IF-2011)
GTIN	4017918929596
Weight per piece (including packing)	413.1 g
Weight per piece (excluding packing)	413.1 g
Customs tariff number	85176200
Country of origin	CA



2867089

https://www.phoenixcontact.com/us/products/2867089

Technical data

Product properties

Product type W	Wireless module
----------------	-----------------

Electrical properties

Supply

Supply voltage	24 V DC
Supply voltage range	9 V DC 30 V DC
Typical current consumption	75 mA
Max. current consumption	24 mA

Input data

Digital

Input voltage range	5 V AC/DC 30 V AC/DC
Switching threshold "0" signal, voltage	max. 1.5 V DC
Switching threshold "1" signal voltage	min. 5 V DC

Analog

Description of the input	Current input (analog input)
Current input signal	4 mA 20 mA
Input resistance current input	< 170 Ω

Analog

Description of the input Voltage	e input (digital input)
----------------------------------	-------------------------

Output data

Digital

Output name	2x relay output + 1 x RF link
Number of outputs	3
Contact switching type	3 floating N/O contacts
Contact material	Ag, gold-plated
Maximum switching voltage	30 V DC
	250 V AC
Limiting continuous current	2 A

Analog

Output name	Current output
Number of outputs	1
Load/output load current output	700 Ω (at $U_B = 24 \text{ V}$, $R_B = [U_B-10 \text{ V}] / 20 \text{ mA}$)

Connection data

Connection method	Screw connection
Stripping length	8 mm



2867089

https://www.phoenixcontact.com/us/products/2867089

Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section rigid	0.2 mm² 4 mm²
Cross section AWG	24 14
Screw thread	M3

Interfaces

Wireless

Direction	Bi-directional
Frequency range	902 MHz 928 MHz
Channel distance	22 kHz
Number of channel groups	4
Number of channels per group	63
Transmission power	1 W

Wireless

Frequency band	900 MHz

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	green
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C 70 °C
Ambient temperature (storage/transport)	-40 °C 85 °C

Approvals

Conformity/Approvals

Conformance	FCC Directive, Part 15.247
	ISC Directive RSS 210

EMC data

Electromagnetic compatibility	FCC Part 15.247 / ISC RSS 210

Mounting


Assembly note	DIN rail NS 35
Mounting position	any



2867089

https://www.phoenixcontact.com/us/products/2867089

Drawings

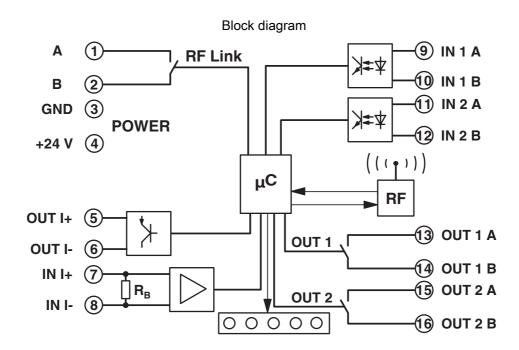



2867089

https://www.phoenixcontact.com/us/products/2867089

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)

No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com