

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors

2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail connector, color: black, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-22,5..., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

Your advantages

- Space-saving installation under the housing in the DIN rail
- Contact design enables electronics modules to be easily snapped on
- Power supply and communication without additional wiring
- Parallel and serial contacts for efficient signal and data transmission

Commercial data

Item number	2869252
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	ACHACA
GTIN	4017918927370
Weight per piece (including packing)	5.1 g
Weight per piece (excluding packing)	5.085 g
Customs tariff number	85366990
Country of origin	DE

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Technical data

Notes

Recommendation	Material of contact pads for bus connector, galvanic gold (hard gold)
----------------	---

Product properties

Product type	DIN rail connector
Product family	TBUS5-22,5..
Number of positions	5
Pitch	3.81 mm

Electrical properties

Nominal current I_N	8 A (parallel contacts)
Nominal voltage U_N	125 V
Contact resistance	4.4 mΩ
Rated surge voltage (III/3)	2.5 kV
Rated voltage (III/2)	125 V
Rated surge voltage (III/2)	2.5 kV
Rated voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV

Connection data

Maximum load current	8 A
----------------------	-----

Material specifications

Material data - contact

Contact material	Cu alloy
Surface characteristics	gold-plated

Material data - housing

Color (Housing)	black (9005)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0

Material specifications - connector

Color ()	()
-----------	-----

Dimensions

Pitch	3.81 mm
Width [w]	29.2 mm
Height [h]	36.5 mm
Length [l]	20.45 mm

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Mechanical tests

Insertion and withdrawal forces

Result	Test passed
No. of cycles	25
Insertion strength per pos. approx.	6 N
Withdraw strength per pos. approx.	5 N

Contact holder in insert

Specification	IEC 60512-15-1:2008-05
Contact holder in insert Requirements >20 N	Test passed

Polarization and coding

Specification	IEC 60512-13-5:2006-02
Result	Test passed

Visual inspection

Specification	IEC 60512-1-1:2002-02
Result	Test passed

Dimension check

Specification	IEC 60512-1-2:2002-02
Result	Test passed

Environmental and real-life conditions

Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 Hz ... 60.1 Hz)
Acceleration	5g (60.1 Hz ... 500 Hz)
Test duration per axis	2.5 h

Durability test

Specification	IEC 60512-9-1:2010-03
Impulse withstand voltage at sea level	2.95 kV
Contact resistance R ₁	4.4 mΩ
Contact resistance R ₂	4.5 mΩ
Insertion/withdrawal cycles	25

Climatic test

Specification	ISO 6988:1985-02
---------------	------------------

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Corrosive stress	0.2 dm ³ SO ₂ on 300 dm ³ /40 °C/1 cycle
Thermal stress	100 °C/168 h
Power-frequency withstand voltage	1.39 kV

Glow-wire test

Specification	IEC 60695-2-10:2013-04
Temperature	850 °C
Time of exposure	30 s

Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	15g
Shock duration	11 ms
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (dependent on the derating curve)
Ambient temperature (storage/transport)	-40 °C ... 55 °C
Relative humidity (storage/transport)	30 % ... 70 %
Ambient temperature (assembly)	-5 °C ... 100 °C

Electrical tests

Thermal test | Test group C

Specification	IEC 60512-5-1:2002-02
Tested number of positions	5

Air clearances and creepage distances |

Specification	IEC 60664-1:2007-04
Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
minimum clearance value - non-homogenous field (III/3)	1.5 mm
minimum creepage distance (III/3)	1.9 mm
Rated insulation voltage (III/2)	125 V
Rated surge voltage (III/2)	2.5 kV
minimum clearance value - non-homogenous field (III/2)	1.5 mm
minimum creepage distance (III/2)	0.75 mm
Rated insulation voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV
minimum clearance value - non-homogenous field (II/2)	1.5 mm
minimum creepage distance (II/2)	1.6 mm

Packaging specifications

Type of packaging	packed in cardboard
Outer packaging type	Carton

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors




2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Drawings

Diagram

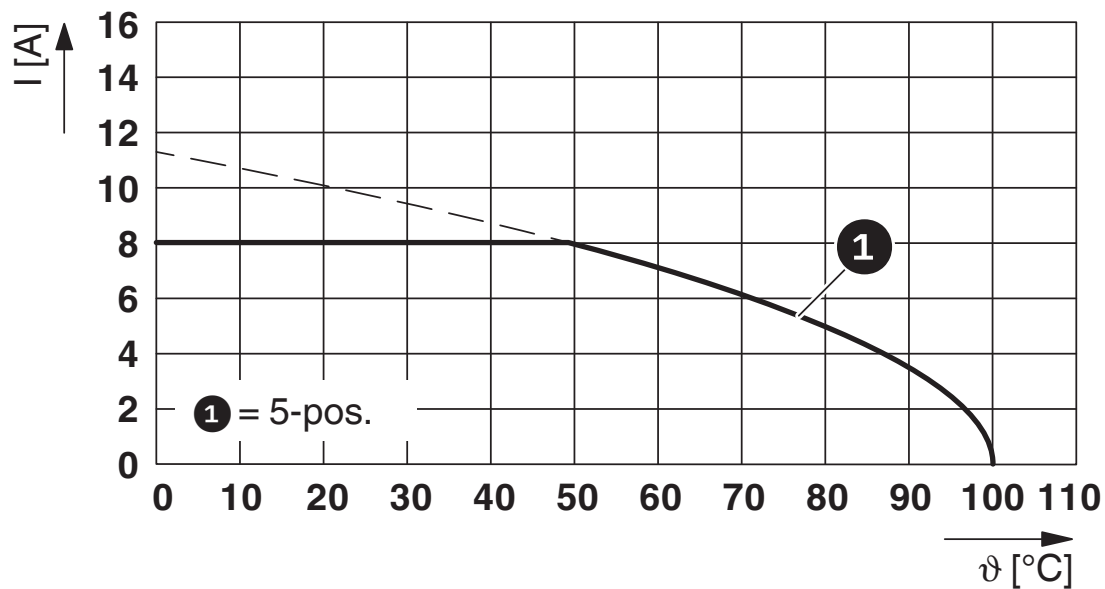

Type: TBUS5...

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252
<https://www.phoenixcontact.com/pc/products/2869252>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2869252>

 cUL Recognized Approval ID: E118976-20151204				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	150 V	6 A	-	-

 UL Recognized Approval ID: E118976-20151204				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	150 V	8 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Classifications

ECLASS

ECLASS-11.0	27460201
ECLASS-12.0	27460201
ECLASS-13.0	27460201

ETIM

ETIM 8.0	EC002637
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252
<https://www.phoenixcontact.com/pc/products/2869252>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

Accessories

E/ME TBUS NS35 GY - End bracket

2713780

<https://www.phoenixcontact.com/pc/products/2713780>



End clamp, stable construction for DIN rail bus connector

E/ME TBUS NS35 BK - End bracket

2203310

<https://www.phoenixcontact.com/pc/products/2203310>



End clamp, stable construction for DIN rail bus connector

ME 22,5 TBUS 1,5/ 5-ST-3,81 BK - DIN rail bus connectors



2869252

<https://www.phoenixcontact.com/pc/products/2869252>

IMC 1,5/ 5-ST-3,81 AU - PCB connectors

1943276

<https://www.phoenixcontact.com/pc/products/1943276>



PCB connector, nominal cross section: 1.5 mm², color: green, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 5, number of rows: 1, number of positions: 5, number of connections: 5, product range: IMC 1,5/...-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

IMC 1,5/ 5-ST-3,81 GY7035 AU - PCB connectors

1719707

<https://www.phoenixcontact.com/pc/products/1719707>



PCB connector, nominal cross section: 1.5 mm², color: light grey, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 5, number of rows: 1, number of positions: 5, number of connections: 5, product range: IMC 1,5/...-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com