

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection in accordance with Class E_A (CAT6_A), for Gigabit Ethernet (up to 10 Gbps), token ring, FDDI/CDDI, ISDN, and DS1. Suitable for Power over Ethernet (PoE++ / 4PPoE) "Mode A" and "Mode B". RJ45 attachment plug with separate grounding cable and ground connection snap-on foot for NS 35 DIN rails.

Your advantages

- Can be used in applications up to 10 Gbps with adapted protective circuit
- High power transmission with PoE++ / 4PPoE support
- Easy network integration via RJ45 jacks
- Can be installed in a control cabinet by removing the ground connection adapter
- Suitable for category 6 high-speed data networks

Commercial data

Item number	2881007
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL24
Product key	CL3112
Catalog page	Page 142 (C-4-2017)
GTIN	4046356151900
Weight per piece (including packing)	314.857 g
Weight per piece (excluding packing)	314.1 g
Customs tariff number	85363010
Country of origin	DE

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Technical data

Product properties

IEC test classification	B2
	C1
	C2
	C3
	D1
Type	Attachment plug for DIN rail mounting
Product type	Surge protection for information technology
Product family	DATATRAB
Number of positions	8
Wire pairs per module	4


Insulation characteristics

Overvoltage category	II
Pollution degree	2

Connection data

Cross section AWG	(converted acc. to IEC)
Connection method	RJ45

Dimensions

Dimensional drawing	
Width	25 mm
Height	102 mm
Depth	63.5 mm

Material specifications

Color	Silver
Housing material	Zinc die-cast

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Line-Line & Line-Ground/Shield
---------------------	--------------------------------

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Maximum continuous voltage U_C (line-line)	$\leq 3.3 \text{ V DC } (\pm 60 \text{ V DC / PoE})$
Rated current	$\leq 1.5 \text{ A } (25^\circ \text{C})$
Operating effective current I_C at U_C	$\leq 1 \mu\text{A}$
Residual current I_{PE}	$\leq 400 \mu\text{A}$
Nominal discharge current I_n (8/20) μs (line-line)	100 A
Nominal discharge current I_n (8/20) μs (line-ground)	2 kA (per signal pair)
Pulse discharge current I_{imp} (10/350) μs (line-earth)	1 kA
Total discharge current I_{total} (8/20) μs	10 kA
Nominal pulse current I_{an} (10/700) μs (line-line)	$\leq 40 \text{ A}$
Nominal pulse current I_{an} (10/700) μs (line-earth)	$\leq 160 \text{ A}$
Output voltage limitation at 1 kV/ μs (line-line) spike	$\leq 85 \text{ V (PoE)}$
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 700 \text{ V}$
Output voltage limitation at 1 kV/ μs (line-line) static	$\leq 9 \text{ V}$
Output voltage limitation at 1 kV/ μs (line-earth) static	$\leq 700 \text{ V}$
Residual voltage at I_n (conductor-conductor)	$\leq 15 \text{ V}$ $\leq 100 \text{ V (PoE)}$
Voltage protection level U_p (line-line)	$\leq 9 \text{ V (B2 - 1 kV / 25 A)}$ $\leq 100 \text{ V (B2 - 1 kV / 25 A - PoE)}$ $\leq 12 \text{ V (C3 - 20 A)}$
Voltage protection level U_p (line-earth)	$\leq 900 \text{ V (B2 - 4 kV / 100 A)}$ $\leq 700 \text{ V (C2 - 4 kV / 2 kA)}$ $\leq 1 \text{ kV (C3 - 80 A)}$
Response time t_A (line-line)	$\leq 1 \text{ ns}$
Response time t_A (line-earth)	$\leq 100 \text{ ns}$
Input attenuation aE, sym.	$\leq 1 \text{ dB (up to 100 MHz/direct measuring)}$ $\leq 1 \text{ dB (up to 250 MHz/direct measuring)}$ $\leq 3 \text{ dB (up to 500 MHz/direct measuring)}$
Near-end crosstalk attenuation	$\geq 35 \text{ dB (250 MHz/100 } \Omega/\text{link)}$ $\geq 45 \text{ dB (100 MHz / 100 } \Omega / \text{Link)}$ $\geq 27 \text{ dB (500 MHz / 100 } \Omega / \text{Link)}$ $\geq 39 \text{ dB (250 MHz/100 } \Omega/\text{direct measuring)}$
Capacity (Core-Core)	typ. 12 pF ($f= 1 \text{ MHz / VR}= 0 \text{ V}$)
Capacity (Core-Earth)	typ. 2 pF ($f= 1 \text{ MHz / VR}= 0 \text{ V}$)
Surge protection fault message	none
Impulse durability (line-line)	B2 - 1 kV / 25 A C3 - 20 A
Impulse durability (line-earth)	B2 - 4 kV / 100 A C2 - 4 kV / 2 kA C3 - 80 A D1 - 1 kA

Environmental and real-life conditions

Ambient conditions

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Altitude	≤ 4000 m (amsl)
Permissible humidity (operation)	5 % ... 85 %

Standards and regulations

Standards/specifications	IEC 61643-21
Note	2002
Standards/specifications	EN 50173-1
Note	2002
Standards/specifications	ISO/IEC 11801-Am.1
Note	2006

Mounting

Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
---------------	---

DT-LAN-CAT.6+ - Surge protection device


2881007

<https://www.phoenixcontact.com/us/products/2881007>




Drawings

Dimensional drawing

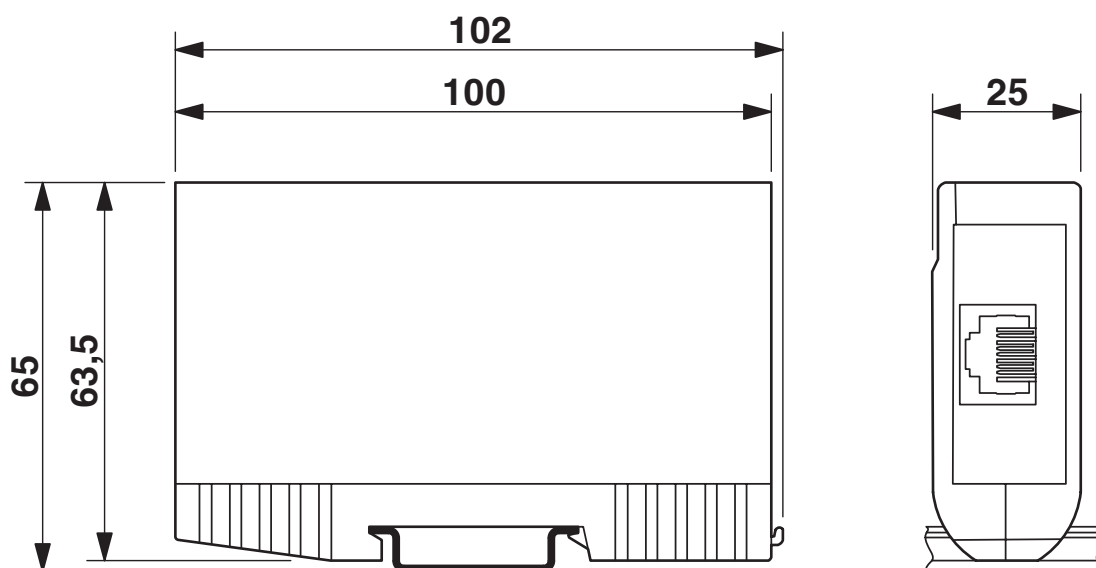

Circuit diagram

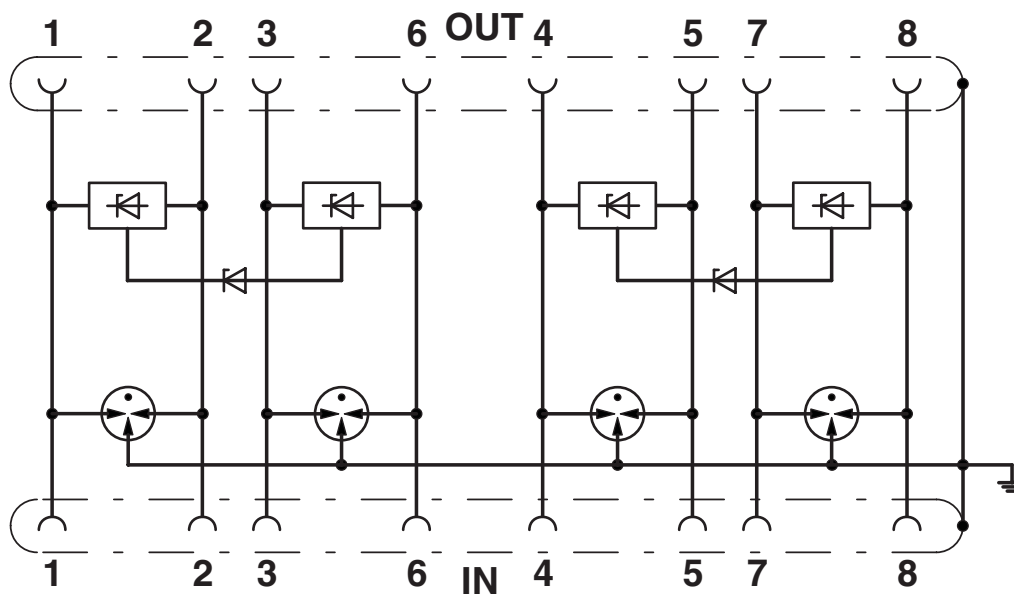


DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Application drawing

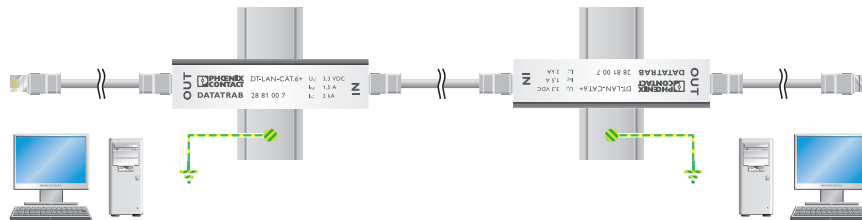

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2881007>



EAC

Approval ID: EAC-Zulassung



EAC

Approval ID: RU C-DE.*09.B.00169



UL Listed

Approval ID: FILE E 138168

UAE-RoHS

Approval ID: 23-10-88352

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Classifications

ECLASS

ECLASS-11.0	27130807
ECLASS-13.0	27171503

ETIM

ETIM 9.0	EC001466
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

DT-LAN-CAT.6+ - Surge protection device



2881007

<https://www.phoenixcontact.com/us/products/2881007>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

DT-LAN-CAT.6+ - Surge protection device



2881007


<https://www.phoenixcontact.com/us/products/2881007>

Accessories

FL CAT6 PATCH 0,5 - Patch cable

2891288

<https://www.phoenixcontact.com/us/products/2891288>



Patch cable, CAT6, preassembled, 0.5 m

FL CAT6 PATCH 1,0 - Patch cable

2891385

<https://www.phoenixcontact.com/us/products/2891385>



Patch cable, CAT6, preassembled, 1.0 m

DT-LAN-CAT.6+ - Surge protection device

2881007

<https://www.phoenixcontact.com/us/products/2881007>




FL CAT6 PATCH 2,0 - Patch cable

2891589

<https://www.phoenixcontact.com/us/products/2891589>

Patch cable, CAT6, preassembled, 2.0 m



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com