

2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Attachment connector with surge protection for mains sockets, mains control lamp, optical power and error display. For country-specific use in: D, A, I, NL, S, N, FIN, E, P. Color: White

Commercial data

Item number	2882213
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CL1421
Catalog page	Page 88 (C-4-2019)
GTIN	4046356073547
Weight per piece (including packing)	125.3 g
Weight per piece (excluding packing)	69.35 g
Customs tariff number	85363010
Country of origin	DE

MNT-1 D/WH - Type 3 surge protection device



2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Technical data

Product properties

Product type	Device protection
Product family	MAINTRAB
IEC power supply system	TN
	TT
Type	Attachment plug
Number of positions	2
For country-specific use in	D, A, NL, E, S, FIN, TR
Surge protection fault message	optical


Insulation characteristics

Overvoltage category	III
Pollution degree	2
IEC test classification	III
	T3
EN type	T3
Number of ports	One

Connection data

Connection method	Grounding plug/socket
-------------------	-----------------------

Dimensions

Dimensional drawing	
Width	56 mm
Height	76 mm
Depth	78 mm

Material specifications

Color	white (RAL 9010)
	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	400
	600
Insulating material	PA 6
Housing material	PA 6

Protective circuit

MNT-1 D/WH - Type 3 surge protection device



2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Mode of protection	L-N
	L-PE
	N-PE
Direction of action	L(N)-PE
Nominal voltage U_N	230/400 V AC (TN/TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous operating voltage U_C (L-N)	275 V AC
Maximum continuous operating voltage U_C (L-PE)	360 V AC
Maximum continuous operating voltage U_C (N-PE)	360 V AC
Rated load current I_L	16 A (30 °C)
Residual current I_{PE}	$\leq 5 \mu A$
Standby power consumption P_C	$\leq 1.00 VA$
Reference test voltage U_{REF}	255 V AC
Combination wave U_{OC}	6 kV
Voltage protection level U_p	$\leq 1.5 kV$
TOV behavior at U_T (L-N)	460 V AC (5 s / withstand mode)
	460 V AC (120 min / safe failure mode)
TOV behavior at U_T (L-PE)	460 V AC (5 s / withstand mode)
	460 V AC (120 min / withstand mode)
	1455 V AC (200 ms / safe failure mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / safe failure mode)
Response time t_A (L-N)	$\leq 25 ns$
Response time t_A (L-PE)	$\leq 100 ns$
Response time t_A (N-PE)	$\leq 100 ns$
Max. required back-up fuse	16 A (gG / B / C)
Short-circuit current rating I_{SCCR}	1.5 kA AC

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (Child-proofing)
Ambient temperature (operation)	-25 °C ... 75 °C
Ambient temperature (storage/transport)	-25 °C ... 75 °C
Altitude	$\leq 2000 m$ (amsl)
Permissible humidity (operation)	5 % ... 95 %

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2019

Mounting

Mounting type	Plugging into the mains socket
---------------	--------------------------------

MNT-1 D/WH - Type 3 surge protection device




2882213


<https://www.phoenixcontact.com/pc/products/2882213>

Drawings

Dimensional drawing

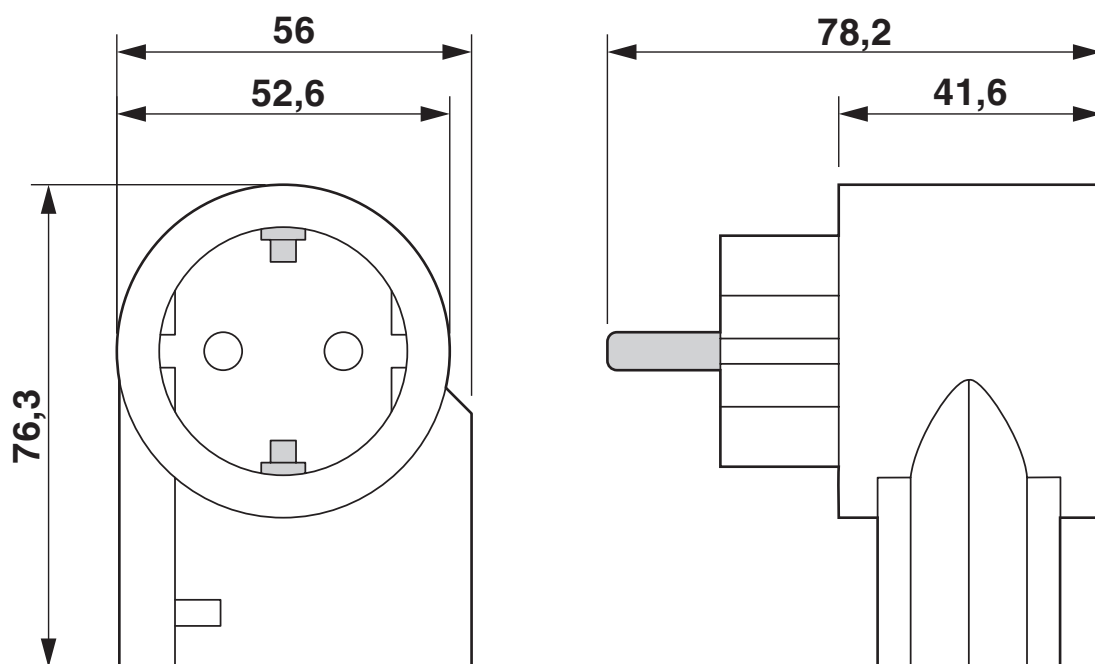

Application drawing

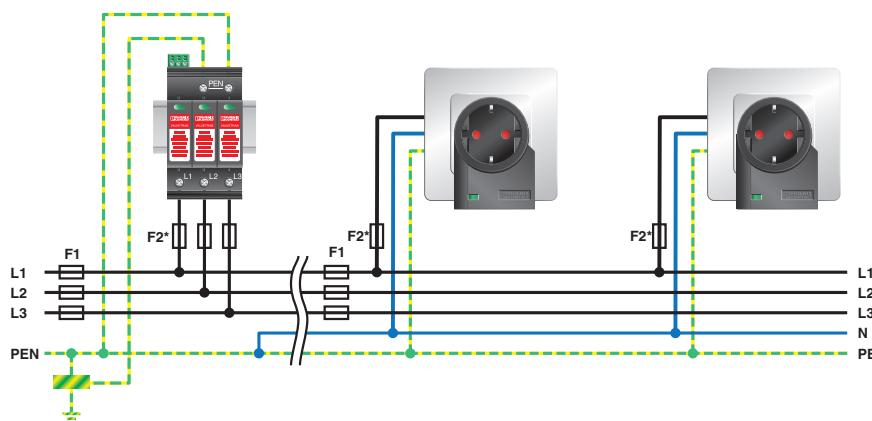


MNT-1 D/WH - Type 3 surge protection device


2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Circuit diagram

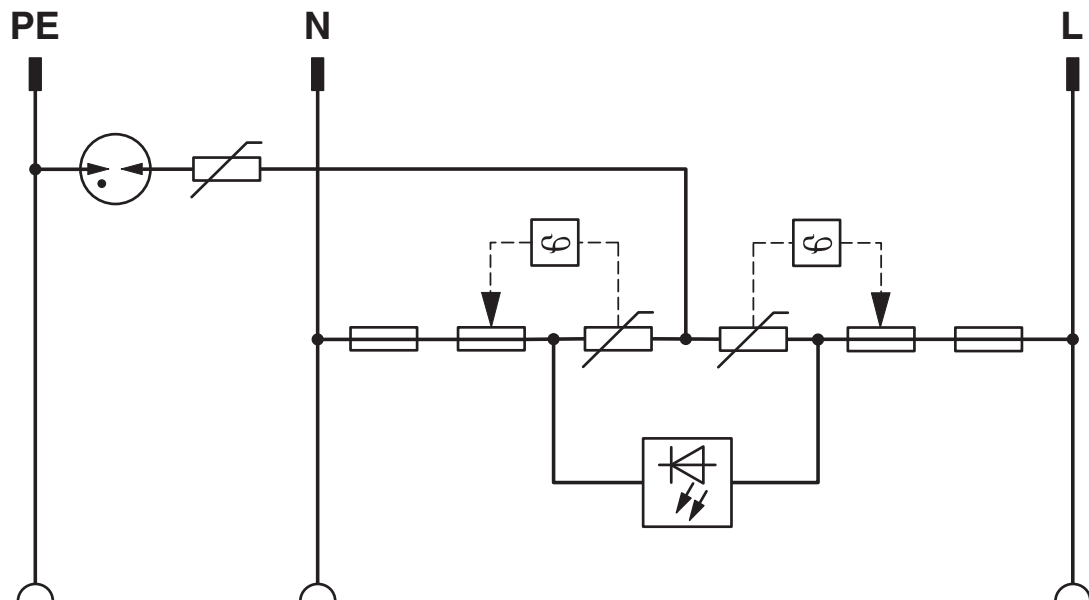

Application drawing

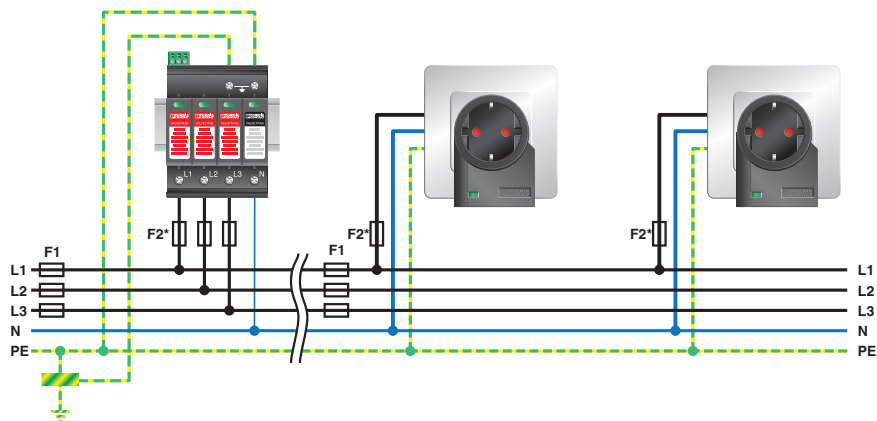

MNT-1 D/WH - Type 3 surge protection device



2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2882213>



EAC

Approval ID: RU C-DE.*09.B.00169

MNT-1 D/WH - Type 3 surge protection device



2882213

<https://www.phoenixcontact.com/pc/products/2882213>

Classifications

ECLASS

ECLASS-11.0	27130806
ECLASS-13.0	27171203

ETIM

ETIM 9.0	EC000942
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

MNT-1 D/WH - Type 3 surge protection device



2882213
<https://www.phoenixcontact.com/pc/products/2882213>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	c00a3aed-36c5-4c34-abc3-31617e627a6d

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com