

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

DIN rail housing, Upper housing part for connectors with header, width: 35.2 mm, height: 99 mm, depth: 45.85 mm, color: black (similar RAL 9005)



## Your advantages

- Tool-free mounting
- Available in overall widths from 12.5 mm to 90 mm, modular extension possible
- Flammability rating V0 in accordance with UL 94
- Variety of connection technology
- Can be mounted on the DIN rail
- With integrated or DIN-rail-mountable bus connector as an option

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 2896869                        |
| Packing unit                         | 10 pc                          |
| Minimum order quantity               | 100 pc                         |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | ACH                            |
| Product key                          | ACHAAD                         |
| GTIN                                 | 4046356118248                  |
| Weight per piece (including packing) | 23.51 g                        |
| Weight per piece (excluding packing) | 16.89 g                        |
| Customs tariff number                | 85389099                       |
| Country of origin                    | DE                             |

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

## Technical data


### Notes

|         |                                                             |
|---------|-------------------------------------------------------------|
| General | Refer to the data sheet for the range in the download area. |
|---------|-------------------------------------------------------------|

### Product properties

|                              |                                               |
|------------------------------|-----------------------------------------------|
| Product type                 | Upper housing part                            |
| Product family               | ME..OT-MSTBO                                  |
| Housing series               | ME                                            |
| Number of positions          | 24                                            |
|                              | 36                                            |
| Max. number of positions     | 32 (pitch: 3.5 mm)                            |
|                              | 24 (pitch: 5 mm)                              |
|                              | 16 (pitch: 7.25 mm)                           |
| Number of rows               | 2                                             |
| Type                         | Upper housing part for connectors with header |
| Housing type                 | DIN rail housing                              |
| Ventilation openings present | no                                            |

### Dimensions

|                                 |                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing             |  |
| Width                           | 35.2 mm                                                                              |
| Height                          | 99 mm                                                                                |
| Depth                           | 45.85 mm                                                                             |
| Depth from base support surface | 38.5 mm                                                                              |

### PCB design

|               |                   |
|---------------|-------------------|
| PCB thickness | 1.4 mm ... 1.8 mm |
|---------------|-------------------|

### Material specifications

|                                        |                  |
|----------------------------------------|------------------|
| Color (Housing)                        | black (RAL 9005) |
| Flammability rating according to UL 94 | V0               |
| CTI according to IEC 60112             | 600              |
| Housing material                       | Polyamide        |
| Surface characteristics                | untreated        |

### Environmental and real-life conditions

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

## Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.15 mm (10 Hz ... 58.1 Hz) |
| Acceleration           | 2g (58.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |
| Test directions        | X-, Y- and Z-axis           |

## Glow-wire test

|                  |                        |
|------------------|------------------------|
| Specification    | IEC 60695-2-11:2014-02 |
| Temperature      | 850 °C                 |
| Time of exposure | 30 s                   |

## Thermal stability / ball thrust test

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-10-2:2014-02 |
| Temperature   | 125 °C                 |
| Test duration | 1 h                    |
| Force         | 20 N                   |

## Mechanical strength / tumbling barrel

|                |                     |
|----------------|---------------------|
| Specification  | IEC 60998-1:2002-12 |
| Height of fall | 50 cm               |
| Frequency      | 10                  |

## Shocks

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Half-sine                         |
| Acceleration                   | 15g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

## Degree of protection (IP code)

|               |                                                   |
|---------------|---------------------------------------------------|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
|---------------|---------------------------------------------------|

## Ambient conditions

|                                         |                                                    |
|-----------------------------------------|----------------------------------------------------|
| Max. IP code to attain                  | IP20                                               |
| Ambient temperature (operation)         | -40 °C ... 105 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -40 °C ... 55 °C                                   |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                   |
| Relative humidity (storage/transport)   | 80 %                                               |

## PCB data

|                       |      |
|-----------------------|------|
| Number of PCB holders | 2    |
| Type of PCB mount     | Slot |

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

|                      |                   |
|----------------------|-------------------|
| Thickness of the PCB | 1.4 mm ... 1.8 mm |
|----------------------|-------------------|

## Mounting

|                   |                                  |
|-------------------|----------------------------------|
| Mounting type     | Latching with lower housing part |
| Mounting position | Vertical (horizontal DIN rail)   |

## Packaging specifications

|                      |                     |
|----------------------|---------------------|
| Type of packaging    | packed in cardboard |
| Outer packaging type | Carton              |

# ME 35 OT-MSTBO BK - Upper housing part


2896869

<https://www.phoenixcontact.com/sk/products/2896869>



## Drawings

Dimensional drawing

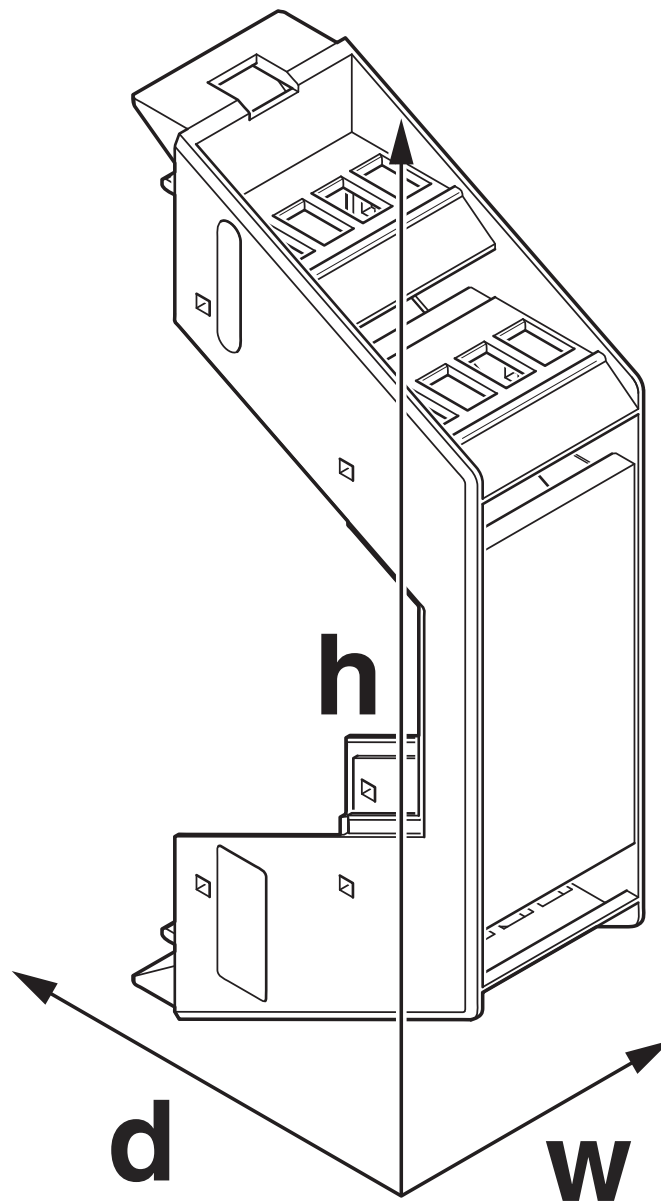

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# ME 35 OT-MSTBO BK - Upper housing part

2896869

<https://www.phoenixcontact.com/sk/products/2896869>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sk/products/2896869>



**UL Recognized**

Approval ID: FILE E 240868

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27182702 |
| ECLASS-13.0 | 27190603 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002779 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# ME 35 OT-MSTBO BK - Upper housing part



2896869

<https://www.phoenixcontact.com/sk/products/2896869>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.  
Námestie Mateja Korvína 1  
811 07 Bratislava  
+421 2 3210 1470  
[obchod.sk@phoenixcontact.com](mailto:obchod.sk@phoenixcontact.com)