

ST-REL3-SG-B 24/21/M - Relay connectors



2898155

<https://www.phoenixcontact.com/us/products/2898155>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay plug, fitted with remanence miniature switching relay, contacts (AgSnO): small to large loads, 1 changeover contact, input voltage 24 V DC, polarity protection and freewheeling diode, negative switching

Commercial data

Item number	2898155
Packing unit	10 pc
Minimum order quantity	10 pc
Note	Made to order (non-returnable)
Sales key	C460
Product key	CK6122
Catalog page	Page 88 (IF-2005)
GTIN	4017918078782
Weight per piece (including packing)	34.13 g
Weight per piece (excluding packing)	34.13 g
Customs tariff number	85364190
Country of origin	DE

Technical data

Product properties

Product type	Relay Module
Operating mode	100% operating factor
Mechanical service life	approx. 10^7 cycles

Insulation characteristics

Insulation	Basic insulation
------------	------------------

Insulation characteristics: Air clearances and creepage distances between the power circuits

Insulation	Basic insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	0.19 W
Test voltage (Winding/contact)	2 kV _{rms} (50 Hz, 1 min., winding/contact)

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage	2.5 kV

Input data

Coil side

Nominal input voltage U_N	24 V DC
Input voltage range	19.2 V DC ... 26.4 V DC (20 °C)
Drive and function	bistable
Drive (polarity)	polarized
Typical input current at U_N	typ. 8 mA
Typical response time	5 ms
Typical release time	5 ms
Pulse time range	30 ms ... 5 s
Coil voltage	24 V DC
Protective circuit	Freewheeling diode; Freewheeling diode Reverse polarity protection; Polarity protection diode

Output data

Switching

Contact switching type	1 changeover contact
Type of switch contact	Single contact
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (At 5 V)

ST-REL3-SG-B 24/21/M - Relay connectors



2898155

<https://www.phoenixcontact.com/us/products/2898155>

	24 V (at 24 V)
Limiting continuous current	6 A
Maximum inrush current	8 A
Min. switching current	1 mA (at 24 V) 100 mA (At 5 V)
Interrupting rating (ohmic load) max.	144 W (at 24 V DC) 43 W (at 48 V DC) 42 W (at 60 V DC) 55 W (at 110 V DC) 100 W (at 220 V DC) 1500 VA (for 250 V AC)

Switching: when the gold layer is destroyed

Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	8 A
Interrupting rating (ohmic load) max.	120 W (at 24 V DC) 40 W (at 48 V DC) 35 W (at 60 V DC) 30 W (at 110 V DC) 55 W (at 220 V DC) 1500 VA (for 250 V AC)

Dimensions

Width	20.8 mm
Height	33 mm
Depth	66.5 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 50178
-----------------------	--------------

Mounting

Mounting type	Plug-in mounting
Assembly instructions	in rows with zero spacing
Mounting position	any


ST-REL3-SG-B 24/21/M - Relay connectors

2898155

<https://www.phoenixcontact.com/us/products/2898155>

Drawings

Circuit diagram

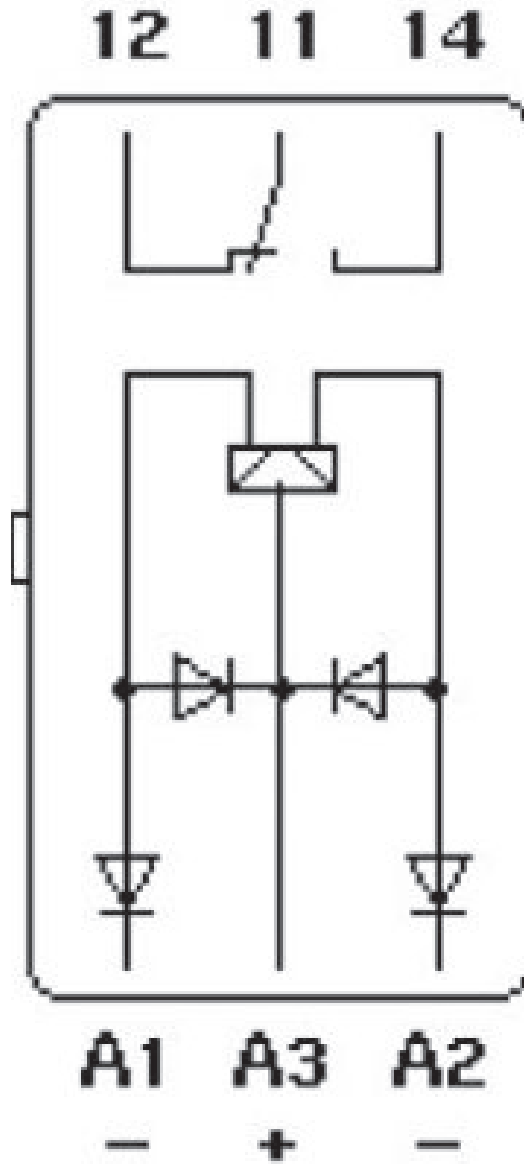

ST-REL3-SG-B 24/21/M - Relay connectors



2898155

<https://www.phoenixcontact.com/us/products/2898155>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2898155>



EAC

Approval ID: TR_TS_D_00573_c



EAC

Approval ID: RU*C-DE.*08.B.00010

ST-REL3-SG-B 24/21/M - Relay connectors



2898155

<https://www.phoenixcontact.com/us/products/2898155>

Classifications

ECLASS

ECLASS-11.0	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601

ETIM

ETIM 8.0	EC001437
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

2898155

<https://www.phoenixcontact.com/us/products/2898155>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	bd5338a0-bc17-4d60-8298-51343fb7235c

ST-REL3-SG-B 24/21/M - Relay connectors

2898155


<https://www.phoenixcontact.com/us/products/2898155>

Accessories

URELG 3-PMTK - Basic terminal block

2820709

<https://www.phoenixcontact.com/us/products/2820709>



Basic terminal blocks with test pick-off on both sides and knife disconnection for NS 32 and NS 35/7,5 DIN rail, with end cover, for ST-REL..., ST-OV..., and ST-OE... plugs, 3-pos.

UDK-RELG 3 - Basic terminal block

2777043

<https://www.phoenixcontact.com/us/products/2777043>



Basic terminal blocks with test pick-off on both sides and double connections with the same potential for NS 32 and NS 35/7,5 DIN rail, with end cover, for ST-REL..., ST-OV..., and ST-OE... plugs, 3-pos.

ST-REL3-SG-B 24/21/M - Relay connectors




2898155

<https://www.phoenixcontact.com/us/products/2898155>

URELG 3 - Basic terminal block

2820136

<https://www.phoenixcontact.com/us/products/2820136>



Basic termination blocks with screw connection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com