2901643

https://www.phoenixcontact.com/us/products/2901643

PHŒNIX CONTACT

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch panel, one RJ45 jack to 8 screw connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

Product description

Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

Your advantages

- · Safe shield connection to ground potential
- CAT5e
- · Mounting on a DIN rail
- 10/100/1000 Mbps
- Optional shield connection via jumpers
- · Shipbuilding approval in accordance with DNV GL
- PoE-capable in accordance with IEEE 802.3bt, type 4

Commercial data

Item number	2901643
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN07
Product key	DNC331
Catalog page	Page 363 (C-6-2019)
GTIN	4046356623391
Weight per piece (including packing)	56.85 g
Weight per piece (excluding packing)	58.08 g
Customs tariff number	85366990
Country of origin	US

2901643

https://www.phoenixcontact.com/us/products/2901643



Technical data

Notes

CCCex note	Use in potentially explosive areas is not permitted in China.
duct properties	
Product type	Patch panel
MTBF	6702 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	2962 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

Connection method	Screw connection
Cross section AWG	(converted acc. to IEC)

Interfaces

Data: Ethernet interface,	10/100/1000Base-T(X)	in accordance with IEEE 802.3
---------------------------	----------------------	-------------------------------


Serial transmission speed	10/100/1000 Mbps
Connection method	Screw connection
No. of channels	1
Tightening torque	0.22 Nm 0.25 Nm
Pin assignment	1:1
Transmission length	100 m (including patch cables)
Single conductor/terminal point, rigid	0.14 mm ² 1.5 mm ²
Single-wire/terminal point, flexible	0.14 mm ² 1 mm ²
Single-wire/terminal point, rigid AWG max.	16
Single-wire/terminal point, rigid AWG min.	26

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Connection method	RJ45 CAT5e
No. of channels	1

Dimensions

Dimensional drawing



Width

29 mm

2901643

https://www.phoenixcontact.com/us/products/2901643

Height	90 mm
Depth	53 mm
terial specifications	
Material	PVC / PA
ble/line	
External cable diameter ()	6 mm 10 mm
Cable impedance	100 Ω
chanical properties	
Mechanical data	
Insertion/withdrawal cycles	≤ 2500
Ambient conditions Degree of protection	IP20
Ambient temperature (operation)	-25 °C 70 °C
Ambient temperature (operation) Ambient temperature (storage/transport)	-25 °C 85 °C
Ambient temperature (assembly)	
	-10 °C 70 °C
Permissible humidity (operation)	-10 °C 70 °C 25 % 95 % (non-condensing)
Permissible humidity (operation)	
Permissible humidity (operation) oprovals ATEX	25 % 95 % (non-condensing)
Permissible humidity (operation) pprovals ATEX Identification	25 % 95 % (non-condensing)
Permissible humidity (operation) oprovals ATEX Identification Certificate Note	25 % 95 % (non-condensing) Image: Second state of the sec
Permissible humidity (operation) oprovals ATEX Identification Certificate Note	25 % 95 % (non-condensing) Image: Second state of the sec
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX	25 % 95 % (non-condensing) Image: Second state of the sec
Permissible humidity (operation) provals ATEX Identification Certificate Note UKEX Identification Certificate	25 % 95 % (non-condensing) I 3 G Ex ec IIC Gc PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! II 3 G Ex ec IIC Gc
Permissible humidity (operation) provals ATEX Identification Certificate Note UKEX Identification Certificate	25 % 95 % (non-condensing) I 3 G Ex ec IIC Gc PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! I 3 G Ex ec IIC Gc
Permissible humidity (operation) Provals ATEX Identification Certificate Note UKEX Identification Certificate Identification Certificate	25 % 95 % (non-condensing) Image: Second state of the sec
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX Identification Certificate Identification Certificate	25 % 95 % (non-condensing) Image: Second state of the sec
Permissible humidity (operation) Provals ATEX Identification Certificate Note UKEX Identification Certificate Ourrosive gas test Identification Shipbuilding Identification	 25 % 95 % (non-condensing) I 3 G Ex ec IIC Gc PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! I 3 G Ex ec IIC Gc PxCIMA21UKEX2901642U ISA-S71.04-1985 G3 Harsh Group A
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX Identification Certificate Orrosive gas test Identification Shipbuilding Identification	 25 % 95 % (non-condensing) I 3 G Ex ec IIC Gc PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! I 3 G Ex ec IIC Gc PxCIMA21UKEX2901642U ISA-S71.04-1985 G3 Harsh Group A
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX Identification Certificate Corrosive gas test Identification Shipbuilding Identification	25 % 95 % (non-condensing) Image: Second Seco
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX Identification Certificate Orrosive gas test Identification Shipbuilding Identification DNV GL data Temperature Humidity Vibration	25 % 95 % (non-condensing) Image: Second structure Image: Second structure PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! Image: Second structure Image: Second structure I
Permissible humidity (operation) oprovals ATEX Identification Certificate Note UKEX Identification Certificate Corrosive gas test Identification Shipbuilding Identification DNV GL data Temperature Humidity	25 % 95 % (non-condensing) I 3 G Ex ec IIC Gc PxCIF14ATEX2901642U Please follow the special installation instructions in the documentation! II 3 G Ex ec IIC Gc PxCIMA21UKEX2901642U ISA-S71.04-1985 G3 Harsh Group A ISA ISA B A

PHŒNIX CONTACT



https://www.phoenixcontact.com/us/products/2901643




Mounting


Mounting type	DIN rail mounting
Connection method	Screw connection



https://www.phoenixcontact.com/us/products/2901643

Drawings

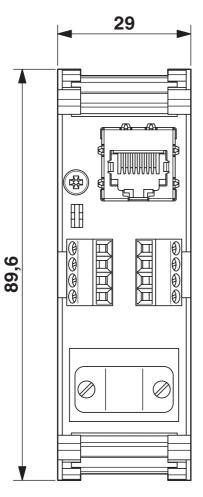

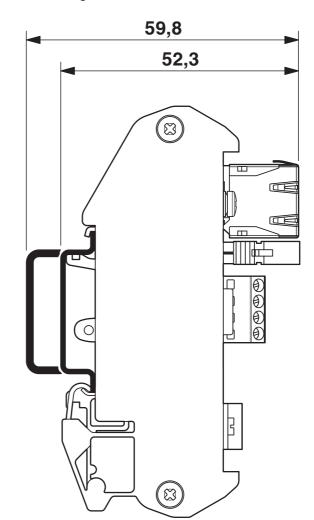

Dimensional drawing

Dimensional drawing


JPHŒN

X



https://www.phoenixcontact.com/us/products/2901643



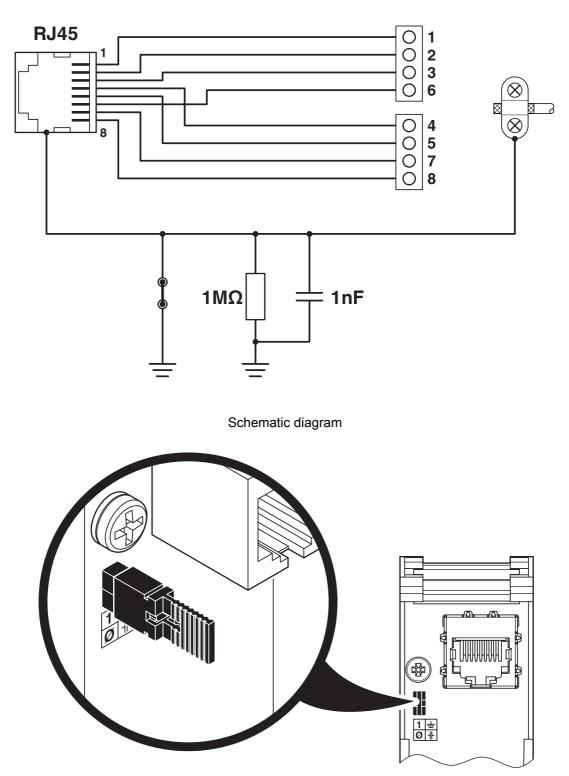

Circuit diagram


Shield connection direct to PE



2901643 https://www.phoenixcontact.com/us/products/2901643



Schematic diagram

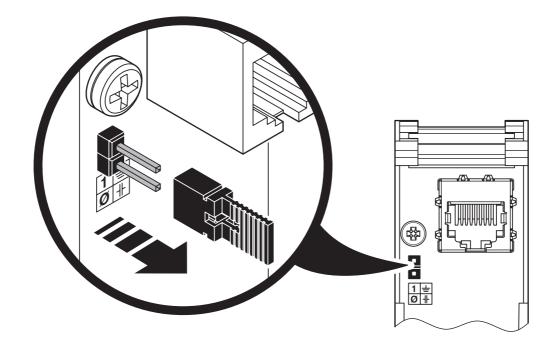

Shield connection to PE via RC element

2901643

https://www.phoenixcontact.com/us/products/2901643



Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2901643



DNV GL Approval ID: TAA00001KR



https://www.phoenixcontact.com/us/products/2901643



Classifications

ECLASS

ECLASS-11.0	19170112
ECLASS-12.0	19170112
ECLASS-13.0	19170112

ETIM

	ETIM 9.0	EC002697	
UN	UNSPSC		
	UNSPSC 21.0	43223309	



2901643 https://www.phoenixcontact.com/us/products/2901643



Environmental product compliance

China RoHS

Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

2901643

https://www.phoenixcontact.com/us/products/2901643



Accessories

FL CRIMPTOOL - Assembly tool

2744869 https://www.phoenixcontact.com/us/products/2744869

Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site



SZF 0-0,4X2,5 - Screwdriver

1204504 https://www.phoenixcontact.com/us/products/1204504



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: $0.4 \times 2.5 \times 75$ mm, 2-component grip, with non-slip grip

2901643 https://www.phoenixcontact.com/us/products/2901643 **PHŒNIX** CONTACT

FL ISOLATOR 100-RJ/RJ - Network isolator

2313931

https://www.phoenixcontact.com/us/products/2313931



Passive network isolator for electrical isolation in Ethernet networks. This protects Ethernet devices from potential differences of up to 4 kV. Can be used for transmission speeds of up to 100 Mbps. Possible to connect two RJ45 plugs.

FL ISOLATOR 1000-RJ/RJ - Network isolator

2313915 https://www.phoenixcontact.com/us/products/2313915



Passive network isolator for electrical isolation in Ethernet networks. This protects Ethernet devices from potential differences of up to 4 kV. Can be used for transmission speeds of up to 1 Gbps. Possible to connect two RJ45 plugs.

2901643

https://www.phoenixcontact.com/us/products/2901643



FL ISOLATOR 100-M12 - Network isolator

2902985

https://www.phoenixcontact.com/us/products/2902985



Passive network isolator for electrical isolation in Ethernet networks. For the protection of Ethernet devices against potential differences of up to 4 kV. Can be used for transmission speeds of up to 100 Mbps. Ethernet connection via two M12 sockets (D-coded).

FL CAT5 PATCH 0,3 - Patch cable

2832250 https://www.phoenixcontact.com/us/products/2832250



Patch cable, CAT5, assembled, 0.3 m

2901643

https://www.phoenixcontact.com/us/products/2901643



FL CAT5 PATCH 0,5 - Patch cable

2832263 https://www.phoenixcontact.com/us/products/2832263

Patch cable, CAT5, assembled, 0.5 m



FL CAT5 PATCH 1,0 - Patch cable

2832276 https://www.phoenixcontact.com/us/products/2832276



Patch cable, CAT5, assembled, 1 m

2901643

https://www.phoenixcontact.com/us/products/2901643



FL CAT5 PATCH 1,5 - Patch cable

2832221 https://www.phoenixcontact.com/us/products/2832221

Patch cable, CAT5, assembled, 1.5 m



FL CAT5 PATCH 2,0 - Patch cable

2832289 https://www.phoenixcontact.com/us/products/2832289



Patch cable, CAT5, assembled, 2 m

2901643

https://www.phoenixcontact.com/us/products/2901643



FL CAT5 PATCH 3,0 - Patch cable

2832292

https://www.phoenixcontact.com/us/products/2832292

Patch cable, CAT5, assembled, 3 m



NBC-R4AC-R4AC-IE8A/.../... - Patch cable

1411854 https://www.phoenixcontact.com/us/products/1411854



Patch cable, degree of protection: IP20, number of positions: 8, 10 Gbps, ${\rm CAT6}_{\rm A},$ cable outlet: straight, Ethernet

2901643

https://www.phoenixcontact.com/us/products/2901643



NBC-R4AC/10G-R4AC/10G-94F/2,0 - Patch cable

1408360

https://www.phoenixcontact.com/us/products/1408360



Patch cable, $CAT6_A$, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 2.0 m

NBC-R4AC/10G-R4AC/10G-94F/3,0 - Patch cable

1408365

https://www.phoenixcontact.com/us/products/1408365



Patch cable, $CAT6_A$, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 3.0 m

2901643

https://www.phoenixcontact.com/us/products/2901643



NBC-R4AC/1,0-93B/R4AC - Patch cable

1408968

https://www.phoenixcontact.com/us/products/1408968



Patch cable, degree of protection: IP20, cable length: 1 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

NBC-R4AC/2,0-93B/R4AC - Patch cable

1408969 https://www.phoenixcontact.com/us/products/1408969



Patch cable, degree of protection: IP20, cable length: 2 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

2901643 https://www.phoenixcontact.com/us/products/2901643



VS-08-RJ45-10G/Q - RJ45 connector

1419001

https://www.phoenixcontact.com/us/products/1419001



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, $CAT6_A$, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 24, cable outlet: straight, color: black, Ethernet

VS-CABLE-STRIP-VARIO - Stripping tool

1657407 https://www.phoenixcontact.com/us/products/1657407

Stripping tool, for the multi-level stripping of shielded cables



2901643 https://www.phoenixcontact.com/us/products/2901643



VS-08-RJ45-5-Q/IP20 - RJ45 connector

1656725

https://www.phoenixcontact.com/us/products/1656725



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 23, cable outlet: straight, color: traffic grey A RAL 7042, Ethernet

VS-08-RJ45-5-Q/IP20 BK - RJ45 connector

1658008

https://www.phoenixcontact.com/us/products/1658008



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 23, cable outlet: straight, color: black, Ethernet

2901643 https://www.phoenixcontact.com/us/products/2901643



VS-PN-RJ45-5-Q/IP20 - RJ45 connector

1658435

https://www.phoenixcontact.com/us/products/1658435



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 4, 100 Mbps, CAT5, material: Plastic, connection method: Insulation displacement connection, cable outlet: straight, color: traffic grey A RAL 7042, PROFINET

FL-PP-RJ45-SCC - Patch panel

2901642 https://www.phoenixcontact.com/us/products/2901642



Patch panel, one RJ45 jack to 8 spring-force connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers



https://www.phoenixcontact.com/us/products/2901643



FL-PP-RJ45-LSA - Patch panel

2901645

https://www.phoenixcontact.com/us/products/2901645



Patch panel, one RJ45 jack to 8 LSA connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via bridges

FL-PP-RJ45/RJ45 - Patch panel

2901646 https://www.phoenixcontact.com/us/products/2901646



Patch panel, two RJ45 jacks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com