

2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Replacement plug for type 3 device protection from the PLUGTRAB SEC T3 product range. 230 V nominal voltage.

Commercial data

Item number	2905235
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	31BCL
Product key	CL14A1
Catalog page	Page 71 (C-4-2017)
GTIN	4046356939768
Weight per piece (including packing)	47 g
Weight per piece (excluding packing)	43.78 g
Customs tariff number	85363030
Country of origin	DE

PLT-SEC-T3-230-P - Type 3 surge protection plug



2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Technical data

Product properties

IEC power supply system	TN-S
	TT
Type	Male
Product type	Replacement plug
Product family	SEC Family
Number of positions	2
Surge protection fault message	optical


Insulation characteristics

Overvoltage category	III
Pollution degree	2
IEC test classification	III
	T3
EN type	T3

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	60.9 mm
Depth	44.8 mm
Horizontal pitch	1 Div.

Material specifications

Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR 20 % GF
	PA 6.6-FR
Material group	I
Housing material	PA 6.6-FR 20 % GF
	PA 6.6-FR

Protective circuit

L-N

PLT-SEC-T3-230-P - Type 3 surge protection plug



2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Mode of protection	L-PE
	N-PE
	(L+) - (L-)
	(L+/L-) - PE
Direction of action	1L-N & N-PE
Nominal voltage U_N	230 V AC (TN-S)
	230 V AC (TT - only in use with RCD)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	264 V AC
	230 V DC
Residual current I_{PE}	$\leq 5 \mu A$
Standby power consumption P_C	$\leq 275 \text{ mVA (at } U_{REF})$
	$\leq 300 \text{ mVA (at } U_C)$
Reference test voltage U_{REF}	255 V AC
Nominal discharge current I_n (8/20) μs	3 kA
Combination wave U_{OC}	6 kV
Voltage protection level U_p (L-N)	$\leq 1.35 \text{ kV}$
Voltage protection level U_p (L-PE)	$\leq 1.5 \text{ kV}$
Voltage protection level U_p (N-PE)	$\leq 1.5 \text{ kV}$
TOV behavior at U_T (L-N)	440 V AC (5 s / withstand mode)
	440 V AC (120 min / withstand mode)
TOV behavior at U_T (L-PE)	440 V AC (5 s / withstand mode)
	440 V AC (120 min / withstand mode)
	1455 V AC (200 ms / safe failure mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / safe failure mode)
Response time t_A (L-N)	$\leq 25 \text{ ns}$
Response time t_A (L-PE)	$\leq 100 \text{ ns}$
Response time t_A (N-PE)	$\leq 100 \text{ ns}$
Short-circuit current rating I_{SCCR}	1.5 kA AC
	0.25 kA DC

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	$\leq 2000 \text{ m (amsl)}$
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	5g (10 ... 150 Hz/20 cycles/axis/X, Y, Z)

Approvals

PLT-SEC-T3-230-P - Type 3 surge protection plug



2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

UL specifications

Maximum continuous operating voltage MCOV	255 V AC
	230 V DC
Nominal discharge current I_n	3 kA
Mode of protection	L-N
	L-G
	N-G
	(L+) - (L-)
	(L+) - G
	(L-) - G
Nominal voltage	230 V DC
Power distribution system	Single phase
Nominal frequency	50/60 Hz
Measured limiting voltage MLV (L-N)	1290 V
Measured limiting voltage MLV (L-G)	1310 V
Measured limiting voltage MLV (N-G)	1310 V
Measured limiting voltage MLV (L+) - (L-)	1290 V
Measured limiting voltage MLV (L+) - G	1310 V
Measured limiting voltage MLV (L-) - G	1310 V
SPD Type	4CA

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011

EN 61643-11

Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	on base element
---------------	-----------------

PLT-SEC-T3-230-P - Type 3 surge protection plug




2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Drawings

Dimensional drawing

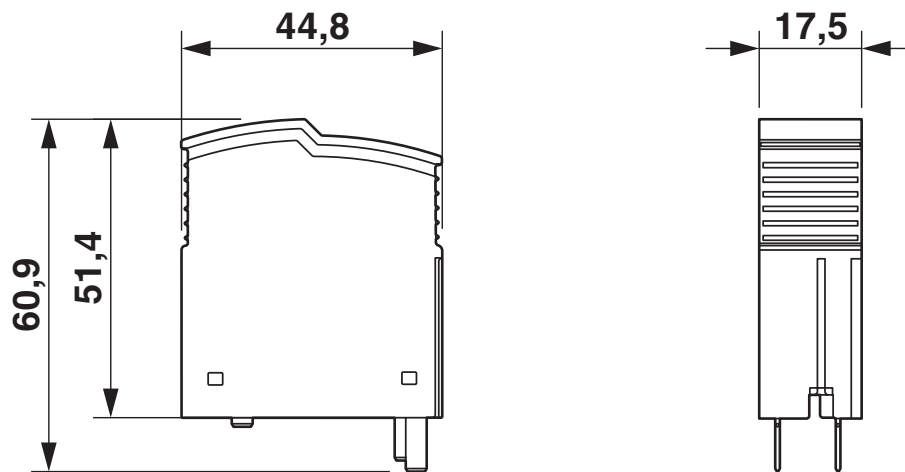

PLT-SEC-T3-230-P - Type 3 surge protection plug


2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>



Circuit diagram

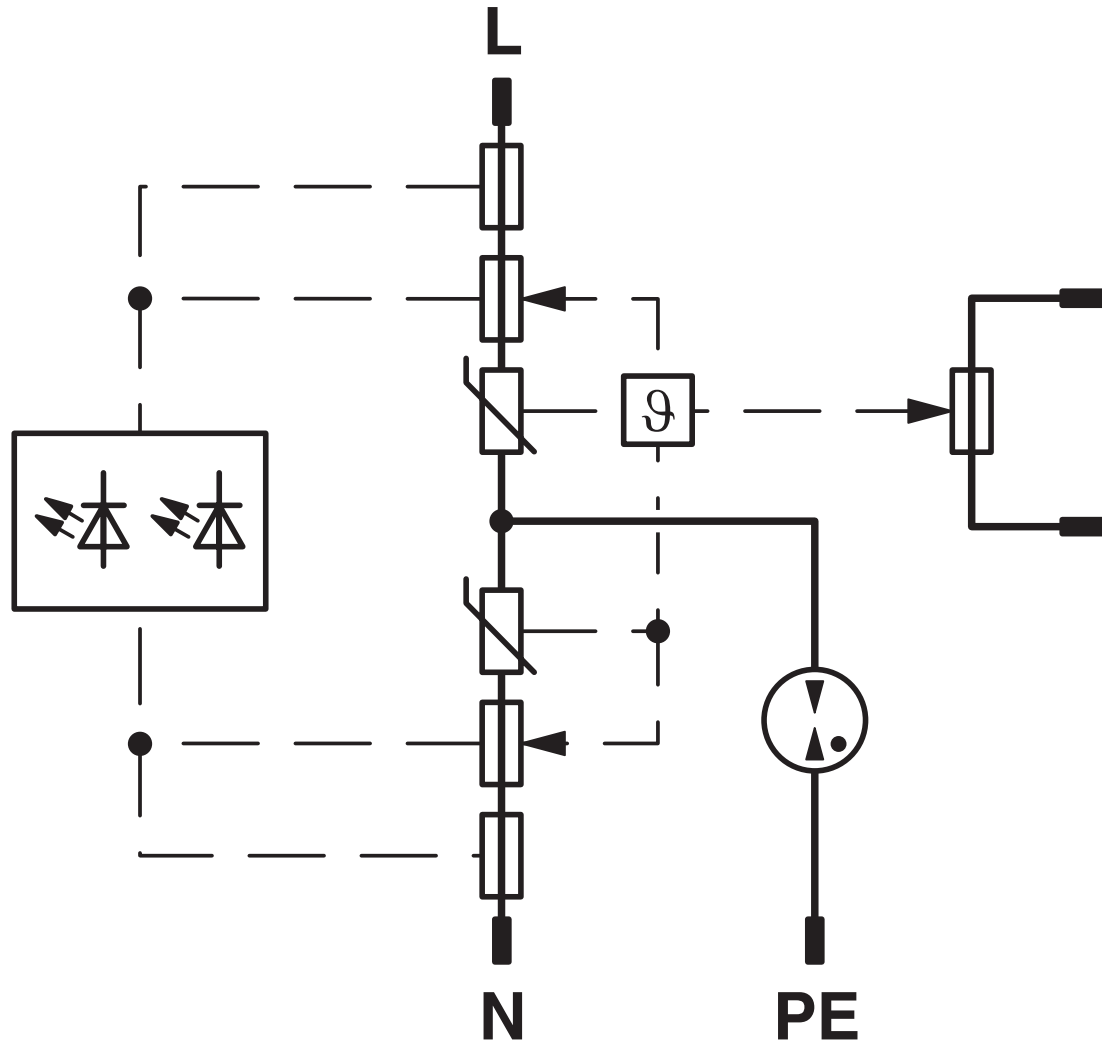

PLT-SEC-T3-230-P - Type 3 surge protection plug



2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Classifications

UNSPSC

UNSPSC 21.0	39121620
-------------	----------

PLT-SEC-T3-230-P - Type 3 surge protection plug



2905235

Electrical number: 1658194

<https://www.phoenixcontact.com/no/products/2905235>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS
Strømsveien 344
N-1081 Oslo
+47 22 07 68 00
norge@phoenixcontact.com