


UM-FLK10/DI/FU/ROC800 - Passive module



2905959

<https://www.phoenixcontact.com/us/products/2905959>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module intended for use with the ROC800 controller digital input cards. UL recognized to Class I, Div. 2.

Your advantages

- Two-level screw terminals for field wiring
- Per channel pluggable fusing, TE5 style, 200 mA
- FLK10 connection on the control side
- UM-PRO housing
- Per channel blown fuse indication
- FLK10 connection on the control side
- Tested for continuity

Commercial data

Item number	2905959
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C421
Product key	CK21A2
GTIN	4055626047461
Weight per piece (including packing)	161.2 g
Weight per piece (excluding packing)	161.2 g
Customs tariff number	85369010
Country of origin	US

UM-FLK10/DI/FU/ROC800 - Passive module



2905959

<https://www.phoenixcontact.com/us/products/2905959>

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	16
No. of channels	8

Electrical properties

Nominal voltage U_N	24 V DC
Supported controller EMERSON ROC800	
Suitable I/O card	ROC800 DI

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Number of positions	16
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	10
Pitch	2.54 mm

Signaling

Status display present	Yes, if the fuse fails
------------------------	------------------------

Dimensions

Item dimensions

Width	54 mm
Height	92.3 mm
Depth	65.5 mm

Material specifications

Housing insulation material	Polyamide PA non-reinforced
-----------------------------	-----------------------------

Environmental and real-life conditions

UM-FLK10/DI/FU/ROC800 - Passive module



2905959

<https://www.phoenixcontact.com/us/products/2905959>

Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C

Mounting


Mounting type	DIN rail mounting
Mounting position	any

Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
---------	--

Drawings

Circuit diagram

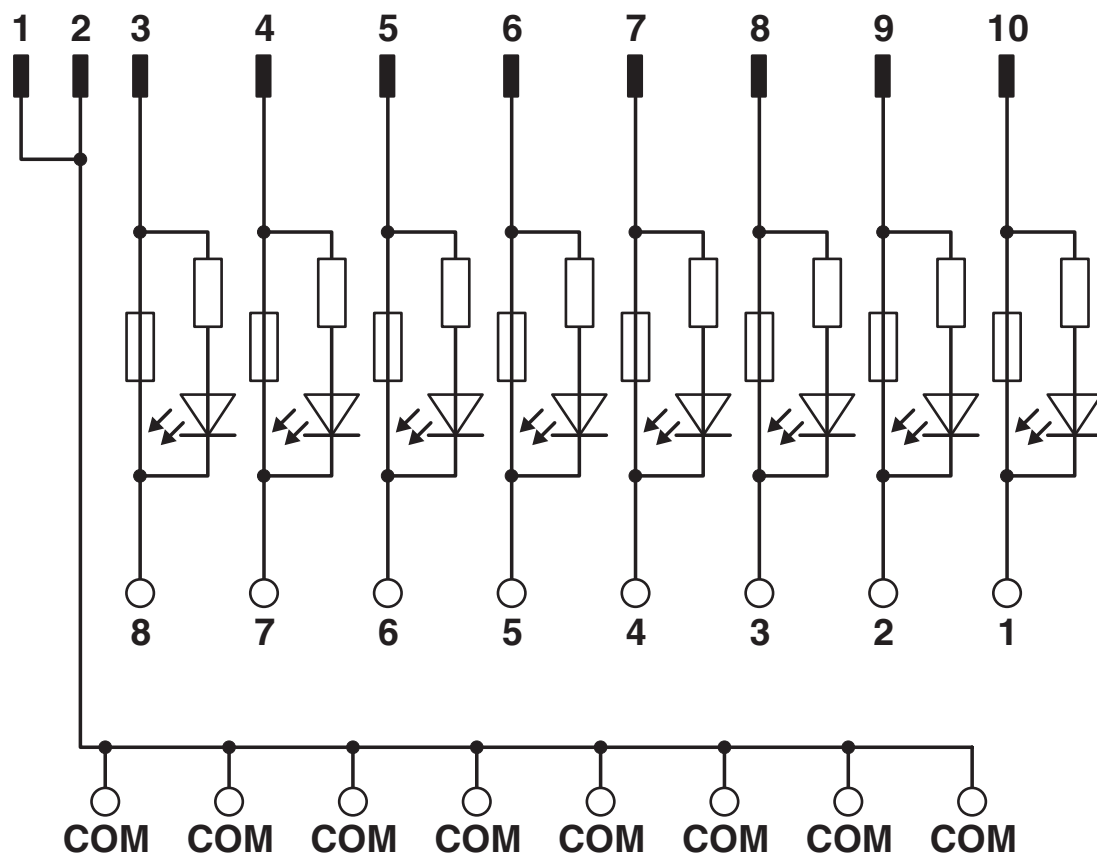

UM-FLK10/DI/FU/ROC800 - Passive module





2905959


<https://www.phoenixcontact.com/us/products/2905959>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905959>

 cUL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	0.2 A	30 - 12	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	0.2 A	30 - 12	-

 cUL Recognized Approval ID: FILE E 196811				
--	--	--	--	--

 UL Recognized Approval ID: FILE E 196811				
--	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

UM-FLK10/DI/FU/ROC800 - Passive module



2905959

<https://www.phoenixcontact.com/us/products/2905959>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-13.0	27141152
ECLASS-12.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UM-FLK10/DI/FU/ROC800 - Passive module



2905959

<https://www.phoenixcontact.com/us/products/2905959>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com