

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker

2907195
<https://www.phoenixcontact.com/ca/products/2907195>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HMC series of supplemental circuit protector modules, 7.5 A rating

Your advantages

- Optional T-bus for reduced wiring
- UL recognized for hazardous locations Class I, Division 2, Groups A, B, C, and D
- Dual-rated for 50 V DC and 120 V AC
- Hydraulic-magnetic technology provides extended temperature stability

Commercial data

Item number	2907195
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL34
Product key	CLA181
GTIN	4055626342382
Weight per piece (including packing)	222.222 g
Weight per piece (excluding packing)	222.222 g
Country of origin	US

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker

2907195

<https://www.phoenixcontact.com/ca/products/2907195>

Technical data

Notes

Trade restriction		
CE note		The products are offered exclusively for export outside the EU and the European Economic Area.

Product properties

Product type	Device circuit breakers
Product family	HMC
Number of positions	4
Number of rows	1


Electrical properties

General		
Nominal current I _N		7.5 A
Rated voltage		120 V AC (50/60 Hz)
		50 V DC
Rated short-circuit switching capacity I _{cn}		1 kA ()
Fuse		Hydraulic magnetic circuit breaker

Connection data

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	7 mm
Conductor cross section rigid	0.2 mm² ... 2.5 mm²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)

Dimensions

Dimensional drawing	
Width	22.6 mm
Height	93.6 mm
Depth	109.2 mm

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker



2907195

<https://www.phoenixcontact.com/ca/products/2907195>

Material specifications

Color	light grey (RAL 7035)
Material	Polyamide
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 65 °C

Standards and regulations

Standards/specifications	UL 1077
--------------------------	---------

Mounting

Mounting type	DIN rail: 35 mm
Mounting position	As desired on 35 mm DIN rail in acc. with EN 60715

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker




2907195

<https://www.phoenixcontact.com/ca/products/2907195>

Drawings

Dimensional drawing

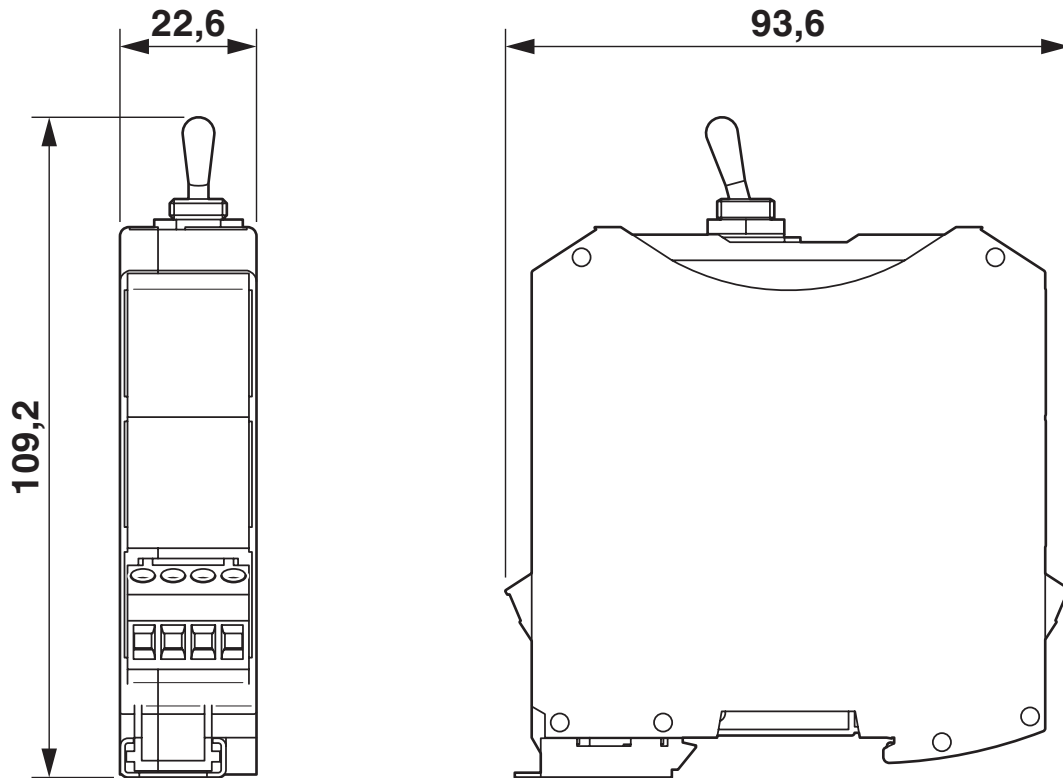


HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker



2907195

<https://www.phoenixcontact.com/ca/products/2907195>

Diagram

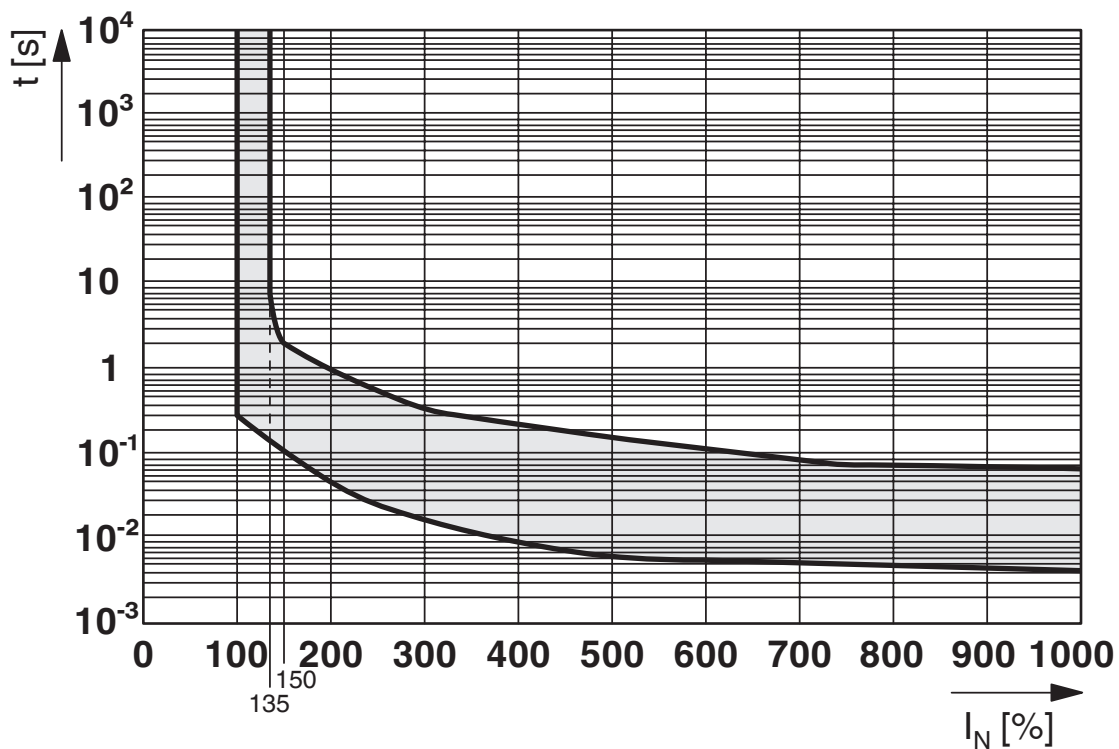

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker



2907195
<https://www.phoenixcontact.com/ca/products/2907195>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/2907195>



cUL Recognized
Approval ID: FILE E 140459



UL Recognized
Approval ID: FILE E 140459



cUL Recognized
Approval ID: FILE E 360692



UL Recognized
Approval ID: FILE E 360692

cULus Recognized

cULus Recognized

HMC 11 120AC 7.5A C1D2 - Hydraulic-magnetic circuit breaker



2907195
<https://www.phoenixcontact.com/ca/products/2907195>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27140401

2907195
<https://www.phoenixcontact.com/ca/products/2907195>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Not applicable, Not qualified for the European market
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
8240 Parkhill Drive
Milton, Ontario L9T 5V7
1-800-890-2820
cdinfo@phoenixcontact.ca