

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204
<https://www.phoenixcontact.com/ae/products/2907204>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HMC series of supplemental circuit protector busbar modules, 7.5 A rating

Your advantages

- T-bus for up to 15 A power distribution
- UL recognized for hazardous locations Class I, Division 2, Groups A, B, C, and D
- Dual-rated for 50 V DC and 120 V AC
- Hydraulic-magnetic technology provides extended temperature stability

Commercial data

Item number	2907204
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CLA
Product key	CLA181
GTIN	4055626342467
Weight per piece (including packing)	222.222 g
Weight per piece (excluding packing)	222.222 g
Country of origin	US

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204

<https://www.phoenixcontact.com/ae/products/2907204>

Technical data

Notes

Trade restriction

CE note	The products are offered exclusively for export outside the EU and the European Economic Area.
---------	--

Product properties

Product type	Device circuit breakers
Product family	HMC
Number of positions	4
Number of rows	1

Electrical properties


General

Nominal current I_N	7.5 A
Rated voltage	120 V AC (50/60 Hz)
	50 V DC
Rated short-circuit switching capacity I_{cn}	1 kA ()
Fuse	Hydraulic magnetic circuit breaker

Connection data

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	7 mm
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 12 (converted acc. to IEC)

Dimensions

Dimensional drawing	
Width	29.2 mm
Height	93.6 mm
Depth	109.2 mm

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204

<https://www.phoenixcontact.com/ae/products/2907204>

Material specifications

Color	light grey (RAL 7035)
Material	Polyamide
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 65 °C

Standards and regulations

Standards/specifications	UL 1077
--------------------------	---------

Mounting

Mounting type	DIN rail: 35 mm
Mounting position	As desired on 35 mm DIN rail in acc. with EN 60715

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker




2907204

<https://www.phoenixcontact.com/ae/products/2907204>

Drawings

Dimensional drawing

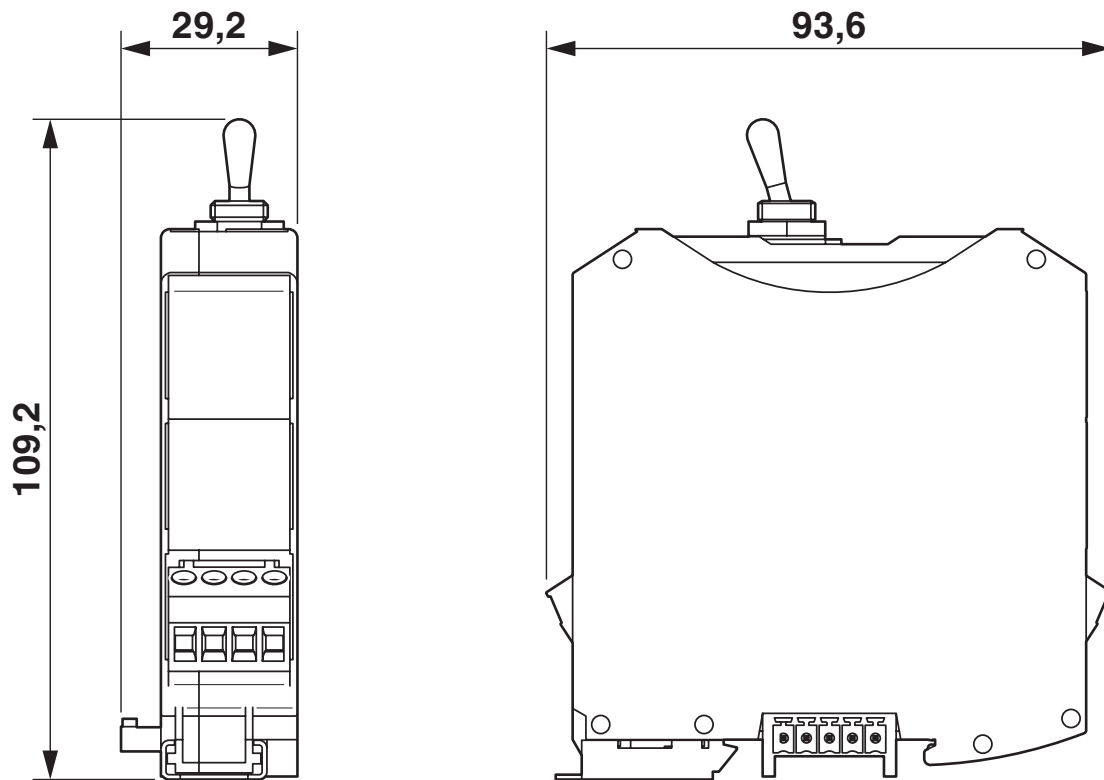


HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204

<https://www.phoenixcontact.com/ae/products/2907204>

Diagram

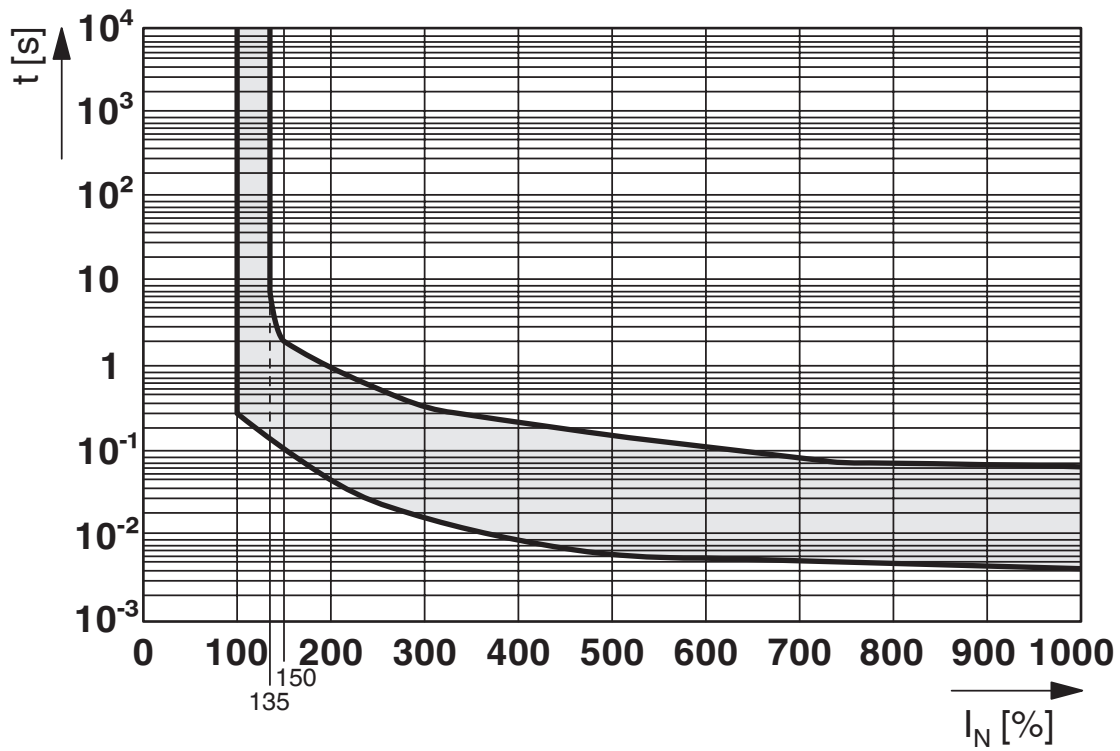

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204

<https://www.phoenixcontact.com/ae/products/2907204>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ae/products/2907204>



cUL Recognized
Approval ID: FILE E 140459



UL Recognized
Approval ID: FILE E 140459



cUL Recognized
Approval ID: FILE E 360692



UL Recognized
Approval ID: FILE E 360692

cULus Recognized

cULus Recognized

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker



2907204
<https://www.phoenixcontact.com/ae/products/2907204>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27140401

HMC 11 120AC 7.5A C1D2 TBUS - Hydraulic-magnetic circuit breaker

2907204
<https://www.phoenixcontact.com/ae/products/2907204>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Middle East FZ LLC
1201N-1206N, Dubai Science Park Towers – North
P.O. Box 345002, Dubai, United Arab Emirates
(+971) 4 437-0324
info-me@phoenixcontact.com