

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Module set for the optical monitoring and floating remote signaling of adjacent surge protective devices in the TERMITRAB complete or CLIXTRAB product family. Suitable for directly grounded DIN rails.

## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Collective remote monitoring of up to 40 protective devices via optical monitoring
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2907811             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | 31BCL               |
| Product key                          | CL226Z              |
| Catalog page                         | Page 127 (C-4-2019) |
| GTIN                                 | 4055626244419       |
| Weight per piece (including packing) | 74.114 g            |
| Weight per piece (excluding packing) | 71.7 g              |
| Customs tariff number                | 85363010            |
| Country of origin                    | DE                  |

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

## Technical data

### Product properties

|                |                            |
|----------------|----------------------------|
| Type           | DIN rail module, one-piece |
| Product type   | Remote signaling set       |
| Product family | TERMITRAB complete         |

### Insulation characteristics

|                  |   |
|------------------|---|
| Pollution degree | 2 |
|------------------|---|

### Electrical properties

#### Indicator/remote signaling

|                    |             |
|--------------------|-------------|
| Switching function | N/C contact |
|--------------------|-------------|

#### Supply: Status indicator/remote signaling

|                   |                     |
|-------------------|---------------------|
| Operating voltage | 10 V DC ... 36 V DC |
| Operating current | 30 mA DC (24 V)     |
|                   | 60 mA DC (10 V)     |


### Connection data

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Push-in connection                          |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section AWG      | 24 ... 12                                   |

### Ex data

|          |                 |
|----------|-----------------|
| Altitude | ≤ 2000 m (amsl) |
|----------|-----------------|

### Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 12.6 mm +0.1 mm                                                                      |
| Height              | 105.8 mm                                                                             |
| Depth               | 83.5 mm (incl. DIN rail 7.5 mm)                                                      |

### Material specifications

|                                        |                 |
|----------------------------------------|-----------------|
| Color                                  | gray (RAL 7042) |
|                                        | gray (RAL 7042) |
| Flammability rating according to UL 94 | V-0             |

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

|                     |     |
|---------------------|-----|
| Insulating material | PBT |
| Housing material    | PBT |

## Protective circuit

|                                |                                   |
|--------------------------------|-----------------------------------|
| Surge protection fault message | Optical, remote indicator contact |
|--------------------------------|-----------------------------------|

## Environmental and real-life conditions

### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -40 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude                                | ≤ 4000 m (amsl)  |
| Permissible humidity (operation)        | 5 % ... 95 %     |

## Approvals

### Conformity/Approvals

|                  |                                        |
|------------------|----------------------------------------|
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4A |
|------------------|----------------------------------------|

## Standards and regulations

|                          |                |
|--------------------------|----------------|
| Standards/specifications | EN 61000-6-2   |
| Note                     | 2005           |
| Standards/specifications | EN 61000-6-3   |
| Note                     | 2007 + A1:2011 |
| Standards/specifications | EN IEC 60079-0 |
| Note                     | 2018           |
| Standards/specifications | EN IEC 60079-7 |
| Note                     | 2015 + A1:2018 |
| Standards/specifications | IEC 60079-0    |
| Note                     | 2017           |
| Standards/specifications | IEC 60079-7    |
| Note                     | 2017           |

## Mounting

|               |                          |
|---------------|--------------------------|
| Mounting type | DIN rail: TH 35 - 7.5 mm |
|---------------|--------------------------|

# TTC-6-FMRS-PT - Remote signaling set


2907811

Electrical number: 1678740


<https://www.phoenixcontact.com/no/products/2907811>

## Drawings

Circuit diagram

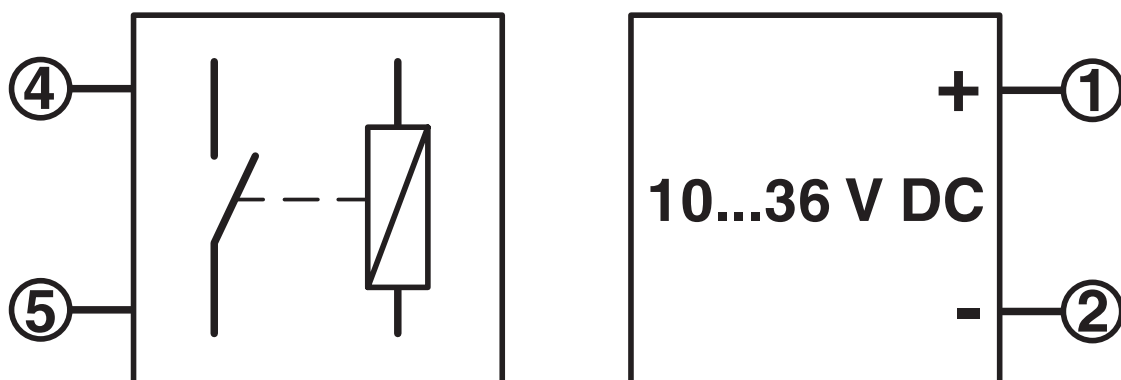

Dimensional drawing

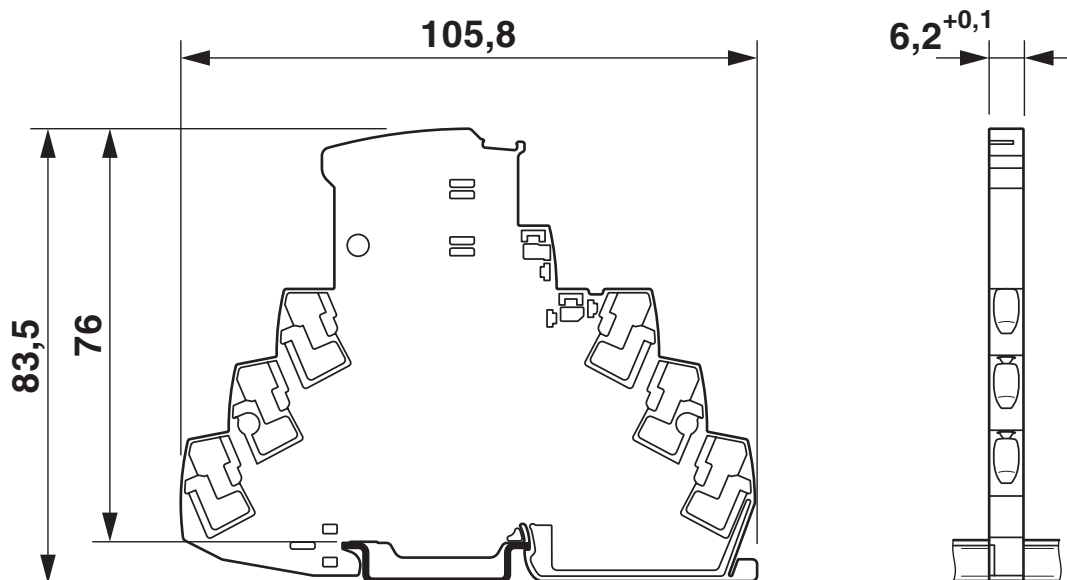

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/2907811>



**CSA**

Approval ID: 70136717



**DNV GL**

Approval ID: TAE000027G



**UL Listed**

Approval ID: FILE E 138168



**CSAus**

Approval ID: 70136717

**UAE-RoHS**

Approval ID: 22-06-16192



**cUL Listed**

Approval ID: FILE E 333250



**UL Listed**

Approval ID: FILE E 333250



**IECEx**

Approval ID: IECEx BVS 21.0057X



**CCC**

Approval ID: 2022122304116080



**ATEX**

Approval ID: BVS 21 ATEX E 052 X

**cCSAus**

# TTC-6-FMRS-PT - Remote signaling set

2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>



cULus Listed

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27130813 |
| ECLASS-13.0 | 27171501 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001625 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

# TTC-6-FMRS-PT - Remote signaling set



2907811

Electrical number: 1678740

<https://www.phoenixcontact.com/no/products/2907811>

## Environmental product compliance

|            |                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                               |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                               |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS  
Strømsveien 344  
N-1081 Oslo  
+47 22 07 68 00  
[norge@phoenixcontact.com](mailto:norge@phoenixcontact.com)