

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protective device, three channel with remote indicator contact for 347/600V and 400/690 V AC, 4-wire.

## Your advantages

- With floating remote indication contact
- UL open terminal listed SPD
- Optical, mechanical status indication for the individual arresters
- Mechanical coding of all slots
- Plugs can be checked with CHECKMASTER
- Multi-channel type 2 protective devices
- Disconnect device on each individual plug

## Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 2910383            |
| Packing unit                         | 1 pc               |
| Minimum order quantity               | 1 pc               |
| Product key                          | CL132U             |
| Catalog page                         | Page 95 (C-4-2019) |
| GTIN                                 | 4055626445212      |
| Weight per piece (including packing) | 382.2 g            |
| Weight per piece (excluding packing) | 354.39 g           |
| Customs tariff number                | 85363030           |
| Country of origin                    | DE                 |

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## Technical data

### Product properties

|                                          |                                              |
|------------------------------------------|----------------------------------------------|
| Product type                             | Surge protection for NEMA power supply units |
| Product family                           | VALVETRAB US                                 |
| IEC test classification                  | II                                           |
|                                          | T2                                           |
| EN type                                  | T2                                           |
| IEC power supply system                  | TN-C                                         |
| Type                                     | DIN rail module, two-section, divisible      |
| Distance between live and grounded parts | 5 mm                                         |
| Number of positions                      | 3                                            |
| Surge protection fault message           | Optical, remote indicator contact            |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree     | 2   |

### Electrical properties

|                         |               |
|-------------------------|---------------|
| Nominal frequency $f_N$ | 50 Hz (60 Hz) |
|-------------------------|---------------|

### Indicator/remote signaling

|                    |                                |
|--------------------|--------------------------------|
| Connection name    | Remote fault indicator contact |
| Switching function | Changeover contact             |
| Operating voltage  | 5 V AC ... 250 V AC            |
|                    | 30 V DC                        |
| Operating current  | 5 mA AC ... 1.5 A AC           |
|                    | 1 A DC                         |

### Connection data

|                                  |                                                     |
|----------------------------------|-----------------------------------------------------|
| Connection method                | Screw connection                                    |
| Screw thread                     | M5                                                  |
| Tightening torque                | 3 Nm (1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> )  |
|                                  | 4.5 Nm (25 mm <sup>2</sup> ... 35 mm <sup>2</sup> ) |
| Stripping length                 | 16 mm                                               |
| Conductor cross section flexible | 1.5 mm <sup>2</sup> ... 25 mm <sup>2</sup>          |
| Conductor cross section rigid    | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>          |
| Conductor cross section AWG      | 15 ... 2                                            |
| Connection method                | Fork-type cable lug                                 |
| Conductor cross section flexible | 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>          |

### Remote fault indicator contact

|                   |                                       |
|-------------------|---------------------------------------|
| Connection method | Plug-in/screw connection via COMBICON |
| Screw thread      | M2                                    |
| Tightening torque | 0.25 Nm                               |

# VAL-US-347/30/3+0-FM - Type 1 surge protection device




2910383

<https://www.phoenixcontact.com/pc/products/2910383>

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| Stripping length                 | 7 mm                                         |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section rigid    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 28 ... 16                                    |

## Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 53.4 mm                                                                            |
| Height              | 98.7 mm                                                                            |
| Depth               | 65.7 mm (incl. DIN rail 7.5 mm)                                                    |
| Horizontal pitch    | 3 Div.                                                                             |

## Material specifications

|                                        |                  |
|----------------------------------------|------------------|
| Color                                  | black (RAL 9005) |
| Flammability rating according to UL 94 | V-0              |
| CTI value of material                  | 600              |
| Insulating material                    | PA 6.6/PBT       |
| Material group                         | I                |
| Housing material                       | PA 6.6<br>PBT    |

## Protective circuit

|                                               |                                                                                         |
|-----------------------------------------------|-----------------------------------------------------------------------------------------|
| Mode of protection                            | L-PEN                                                                                   |
| Direction of action                           | 3L-GND                                                                                  |
| Nominal voltage $U_N$                         | 400/690 V AC (TN-C)<br>347/600 V AC (TN-C)                                              |
| Nominal frequency $f_N$                       | 50 Hz (60 Hz)                                                                           |
| Maximum continuous voltage $U_C$              | 580 V AC                                                                                |
| Standby power consumption $P_C$               | ≤ 150.00 mVA                                                                            |
| Nominal discharge current $I_n$ (8/20) μs     | 15 kA                                                                                   |
| Maximum discharge current $I_{max}$ (8/20) μs | 30 kA                                                                                   |
| Short-circuit current rating $I_{SCCR}$       | 25 kA                                                                                   |
| Voltage protection level $U_p$                | ≤ 2.5 kV                                                                                |
| Residual voltage $U_{res}$                    | ≤ 2.5 kV (at $I_n$ )<br>≤ 2.3 kV (at 10 kA)<br>≤ 2.1 kV (at 5 kA)<br>≤ 1.9 kV (at 3 kA) |
| TOV behavior at $U_T$                         | 690 V AC (5 s / withstand mode)<br>762 V AC (120 min / withstand mode)                  |
| Max. backup fuse with branch wiring           | 125 A (gG)                                                                              |

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                               |
|-----------------------------------------|-----------------------------------------------|
| Degree of protection                    | IP20 (only when all terminal points are used) |
| Ambient temperature (operation)         | -40 °C ... 80 °C                              |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                              |
| Altitude                                | ≤ 2000 m (amsl)                               |
| Permissible humidity (operation)        | 5 % ... 95 %                                  |
| Shock (operation)                       | 25g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)       |
| Vibration (operation)                   | 5g (10 ... 500 Hz / 2.5 h / X, Y, Z)          |

## Approvals

### UL specifications

|                                                 |                            |
|-------------------------------------------------|----------------------------|
| Maximum continuous operating voltage MCOV (L-L) | 750 V AC                   |
| Maximum continuous operating voltage MCOV (L-G) | 580 V AC                   |
| Short-circuit current rating (SCCR)             | 200 kA                     |
| Voltage protection rating VPR (L-L)             | 4000 V                     |
| Voltage protection rating VPR (L-G)             | 2000 V                     |
| UL type                                         | type 1                     |
| Nominal discharge current $I_n$                 | 20 kA                      |
| Maximum Surge Current per Phase                 | 30 kA                      |
| Mode of protection                              | L-L                        |
|                                                 | L-G                        |
| Nominal voltage                                 | 347/600 V AC (3-phase Wye) |
|                                                 | 400/690 V AC (3-phase Wye) |
| Power distribution system                       | Wye                        |
| Nominal frequency                               | 50/60 Hz                   |
| SPD Type                                        | 1                          |

### UL indicator/remote signaling

|                      |          |
|----------------------|----------|
| Operating voltage    | 125 V AC |
| AC operating current | 1 A AC   |

### UL connection data

|                             |                         |
|-----------------------------|-------------------------|
| Tightening torque           | 30 lb <sub>f</sub> -in. |
| Conductor cross section AWG | 14 ... 2                |

## Standards and regulations

### Air clearances and creepage distances

|                          |                          |
|--------------------------|--------------------------|
| Standards/regulations    | EN 60664-1 / EN 61643-11 |
| Standards/specifications | IEC 61643-11             |
| Note                     | 2011                     |
| Standards/specifications | EN 61643-11              |
| Note                     | 2012                     |

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383  
<https://www.phoenixcontact.com/pc/products/2910383>

## Mounting

|               |                 |
|---------------|-----------------|
| Mounting type | DIN rail: 35 mm |
|---------------|-----------------|

# VAL-US-347/30/3+0-FM - Type 1 surge protection device




2910383


<https://www.phoenixcontact.com/pc/products/2910383>

## Drawings

Dimensional drawing

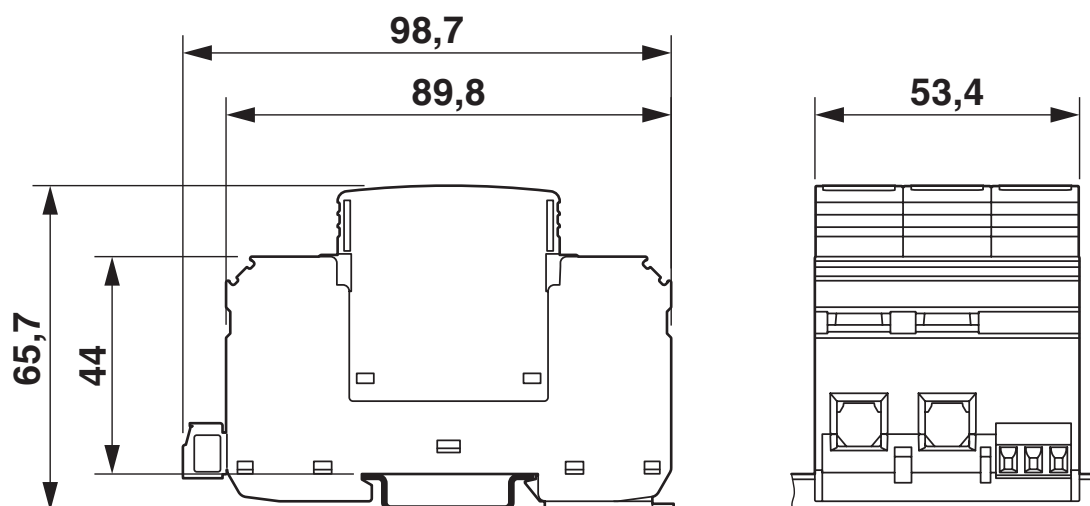

Circuit diagram

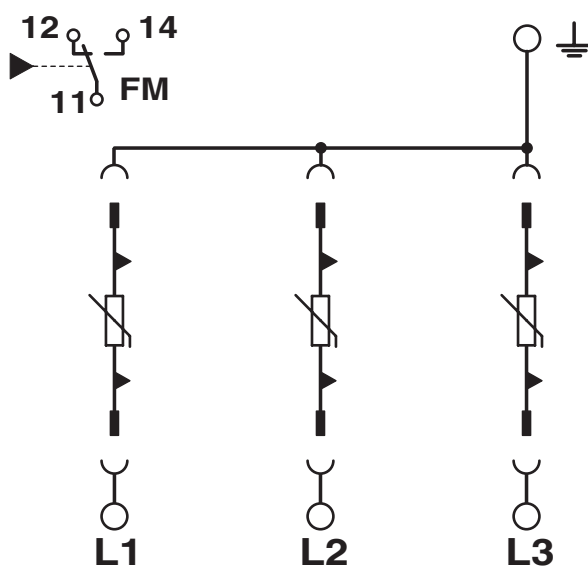

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383  
<https://www.phoenixcontact.com/pc/products/2910383>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2910383>



**UL Listed**  
Approval ID: FILE E 330181



**cUL Listed**  
Approval ID: FILE E 330181

**cULus Listed**

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383  
<https://www.phoenixcontact.com/pc/products/2910383>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27130805 |
| ECLASS-13.0 | 27171202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000941 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|



# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383  
<https://www.phoenixcontact.com/pc/products/2910383>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## Accessories

### MPB F600X16/ 1GS - Wiring bridge

2818355

<https://www.phoenixcontact.com/pc/products/2818355>



Wiring bridge flexible, diameter: 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 600 mm

---

### MPB F200X16/ 1GS - Wiring bridge

2818339

<https://www.phoenixcontact.com/pc/products/2818339>



Wiring bridge flexible, diameter 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 200 mm

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/1-10/1.0.0 - Wiring bridge

2830443

<https://www.phoenixcontact.com/pc/products/2830443>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 10 pitches with contact sequence 1-0-0

---

## MPB 18/4-12 - Wiring bridge

2809296

<https://www.phoenixcontact.com/pc/products/2809296>



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 12-pos.

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/4- 8 - Wiring bridge

2809283

<https://www.phoenixcontact.com/pc/products/2809283>




Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 8-pos.

---

## MPB 18/3- 6 - Wiring bridge

2809241

<https://www.phoenixcontact.com/pc/products/2809241>



Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/1-57 - Wiring bridge

2809238

<https://www.phoenixcontact.com/pc/products/2809238>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.

---

## MPB 18/1-12 - Wiring bridge

2748593

<https://www.phoenixcontact.com/pc/products/2748593>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/1- 9 - Wiring bridge

2748580

<https://www.phoenixcontact.com/pc/products/2748580>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

---

## MPB 18/1- 8 - Wiring bridge

2748577

<https://www.phoenixcontact.com/pc/products/2748577>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/1- 6 - Wiring bridge

2748564

<https://www.phoenixcontact.com/pc/products/2748564>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

---

## MPB 18/1- 4 - Wiring bridge

2809225

<https://www.phoenixcontact.com/pc/products/2809225>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## MPB 18/1- 3 - Wiring bridge

2809212

<https://www.phoenixcontact.com/pc/products/2809212>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.

---

## MPB 18/1- 2 - Wiring bridge

2809209

<https://www.phoenixcontact.com/pc/products/2809209>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.



# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## ZBN 18,LGS:ERDE - Marker for terminal blocks

2749589

<https://www.phoenixcontact.com/pc/products/2749589>



Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

---

## ZBN 18,LGS:L1-N,ERDE - Marker for terminal blocks

2749576

<https://www.phoenixcontact.com/pc/products/2749576>



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## ZBN 18:UNBEDRUCKT - Zack marker strip

2809128

<https://www.phoenixcontact.com/pc/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

---

## DK-BIC-35 - Feed-through terminal block

2749880

<https://www.phoenixcontact.com/pc/products/2749880>



Feed-through terminal block for VAL and FLT applications

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/pc/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

# VAL-US-347/30/3+0-FM - Type 1 surge protection device



2910383

<https://www.phoenixcontact.com/pc/products/2910383>

## VAL-US-347/30-P - Type 1 surge protection plug

2910339

<https://www.phoenixcontact.com/pc/products/2910339>



UL Recognized type 1 SPD and IEC type 2 surge protection plug with a varistor and thermal disconnect for use with VAL-US base elements, mechanical and visual fault warning

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)