

Busbar

Part no.

EVG-16/1PHAS/2MODUL

Article no.


291464



Delivery programme

|                |       |               |                                        |
|----------------|-------|---------------|----------------------------------------|
| Range          |       |               | Accessories                            |
| Basic function |       |               | EVG busbars                            |
|                |       |               | no end caps required<br>do not shorten |
| Rated current  | $I_n$ | A             | 100                                    |
| Cross-section  |       | $\text{mm}^2$ | 16                                     |
| For use with   |       |               | FAZ...<br>FI...                        |
| Phases         |       | Number        | 1                                      |
| Devices        |       | Number        | 2                                      |

Notes

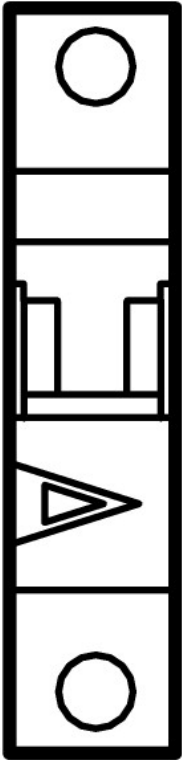


Technische Daten nach ETIM 4.0

|                                               |  |               |                  |
|-----------------------------------------------|--|---------------|------------------|
| Insulated                                     |  |               | true             |
| Number of phases                              |  |               | 1                |
| Cross-section                                 |  | $\text{mm}^2$ | 16 $\text{mm}^2$ |
| Rated uninterrupted current $I_u$             |  | A             | 80 A             |
| Length                                        |  | mm            | 35.6 mm          |
| Rated conditional short-circuit current $I_q$ |  | kA            | 25 kA            |
| Rated impulse voltage                         |  | kV            | 4 kV             |
| Design of electrical connection               |  |               | Fork connector   |
| Rated short-time withstand current $I_{cw}$   |  | kA            | 0 kA             |
| Suitable for devices with auxiliary contacts  |  |               | false            |
| Suitable for devices with neutral pole        |  |               | false            |
| Suitable for number of devices                |  |               | 0                |

|                                 |  |    |       |
|---------------------------------|--|----|-------|
| Max. rated operating voltage Ue |  | V  | 415 V |
| Unit width                      |  | mm | 0 mm  |

Dimensions

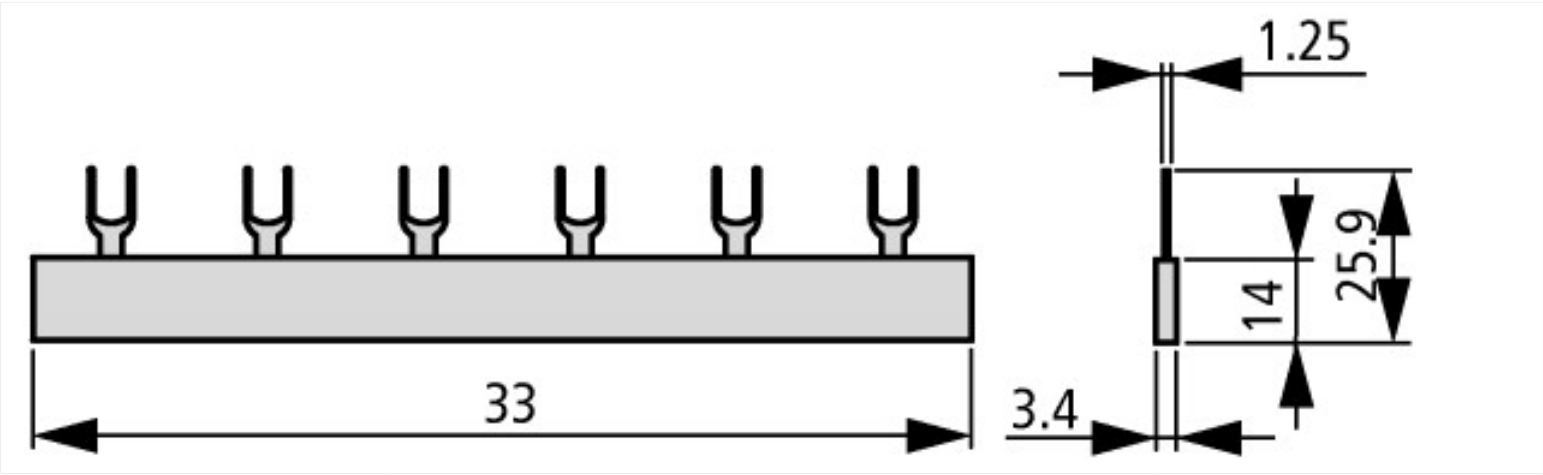

Additional product information (links)