

Specifications

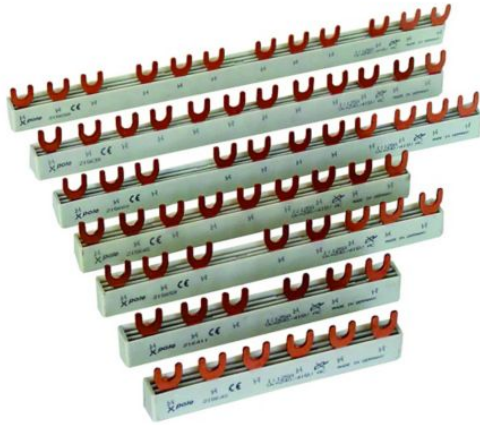


Photo is representative

Eaton 291474

Eaton Moeller series xPole - Busbar. EV busbars 3Ph., 20HP, 80A for PLS. CLS. PKN., PFIM, PFHM, PFNM

General specifications

| | |
|----------------------|-----------------------------|
| PRODUCT NAME | Eaton Moeller series busbar |
| CATALOG NUMBER | 291474 |
| MODEL CODE | EVG-16/3PHAS/20MODUL |
| EAN | 4015082914745 |
| PRODUCT LENGTH/DEPTH | 33 mm |
| PRODUCT HEIGHT | 10.4 mm |
| PRODUCT WIDTH | 350 mm |
| PRODUCT WEIGHT | 0.202 kg |
| COMPLIANCES | RoHS conform |

Product specifications

| | |
|--|--|
| USED WITH | EVG Busbar |
| TYPE | <ul style="list-style-type: none">• Busbar• EVG |
| FEATURES | Insulated |
| ACCESSORY/SPARE PART TYPE | Busbar for combined residual current/power circuit breaker Busbar for residual current circuit breakers Busbar for miniature circuit breaker |
| ELECTRIC CONNECTION TYPE | Fork |
| RATED SURGE VOLTAGE | 4 kV |
| RATED UNINTERRUPTED CURRENT (IU) | 80 A |
| SUITABLE FOR NUMBER OF DEVICES | 9 |
| NUMBER OF POLES | Three-pole |
| COLOR | Other |
| RATED SHORT-TIME WITHSTAND CURRENT (ICW) | 0 kA |
| CROSS SECTION | 16 mm ² |
| NUMBER OF MODULAR SPACINGS | 20 |
| NUMBER OF PHASES | 3 |
| PITCH DIMENSIONS | 0 mm |
| RATED OPERATIONAL VOLTAGE (UE) - MAX | 415 V |
| RATED CONDITIONAL SHORT-CIRCUIT CURRENT (IQ) | 25 kA |
| FUNCTIONS | Busbar |
| SUITABLE FOR | 6 devices |

Resources

DECLARATIONS OF CONFORMITY

[DA-DC-03_EVG](#)

DRAWINGS

[eaton-mcb-busbar-dimensions-011.eps](#)

[eaton-busbar-3d-drawing.jpg](#)

| |
|-----------------|
| PROJECT NAME: |
| PROJECT NUMBER: |
| PREPARED BY: |
| DATE: |



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

