

Surge protection device - TT-2-PE/S1-M-24DC - 2920638

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Double-level modular terminal block with two-stage surge protection for one two-wire impedance-sensitive signal circuit, disconnect knife on both signal paths, separate ground connection, nominal voltage: 24 V DC.

Why buy this product

- ✓ Versions with and without disconnect knife
- ✓ Protection of a floating double wire in which the introduction of additional resistors for decoupling the protection stages leads to problems
- ✓ Multi-stage modular terminal blocks with screw connection technology
- ✓ Disconnection of signal circuits by disconnect knife



Key Commercial Data

Packing unit	14 STK
GTIN	 4 046356 160186
GTIN	4046356160186

Technical data

Dimensions

Height	94.8 mm
Width	6.2 mm
Depth	69.1 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Degree of protection	IP20 (with end cover)

General

Housing material	PA 6.6
Flammability rating according to UL 94	V-0

Surge protection device - TT-2-PE/S1-M-24DC - 2920638

Technical data

General

Color	jet black RAL 9005
Mounting type	DIN rail: 35 mm
Type	Double-level terminal block with PE foot – separate PE connection
Number of positions	2
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous voltage U_C	30 V DC
	21 V AC
Rated current	10 A (40 °C)
Operating effective current I_C at U_C	$\leq 5 \mu A$
Residual current I_{PE}	$\leq 2 \mu A$
Nominal discharge current I_n (8/20) μs (line-line)	300 A
Nominal discharge current I_n (8/20) μs (line-earth)	5 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	500 A
Total discharge current I_{total} (8/20) μs	10 kA
Nominal pulse current I_{an} (10/1000) μs (line-line)	60 A
Nominal pulse current I_{an} (10/1000) μs (line-earth)	100 A
Output voltage limitation at 1 kV/ μs (line-line) spike	$\leq 45 V$
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 650 V$
Output voltage limitation at 1 kV/ μs (line-line) static	$\leq 45 V$
Output voltage limitation at 1 kV/ μs (line-earth) static	$\leq 650 V$
Residual voltage at I_n (line-line)	$\leq 55 V$
Residual voltage with I_{an} (10/1000) μs (line-line)	$\leq 50 V$
Voltage protection level U_p (line-line)	$\leq 50 V$ (C1 - 500 V / 250 A)
Response time t_A (line-line)	$\leq 1 ns$
Response time t_A (line-earth)	$\leq 100 ns$
Input attenuation aE, sym.	typ. 0.1 dB ($\leq 1 MHz / 50 \Omega$)
	typ. 0.1 dB ($\leq 400 kHz / 150 \Omega$)
Cut-off frequency f_g (3 dB), sym. in 50 Ohm system	typ. 7 MHz
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	typ. 2 MHz
Capacity (line-line)	$< 2.5 nF$
Resistance in series	$< 5 m\Omega$
Surge protection fault message	none
Max. required back-up fuse	10 A (gL/gG/C)
Impulse durability (line-line)	C1 - 500 V / 250 A

Surge protection device - TT-2-PE/S1-M-24DC - 2920638

Technical data

Protective circuit

	C3 - 25 A
Impulse durability (line-earth)	C2 - 10 kV/5 kA
	D1 - 500 A

Connection data

Connection method	Screw connection
Connection method IN	Screw terminal blocks
Connection method OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.6 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 14

Standards and Regulations


Standards/specifications	EN 61643-21 2001
	IEC 61643-21 2000

Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Diagram

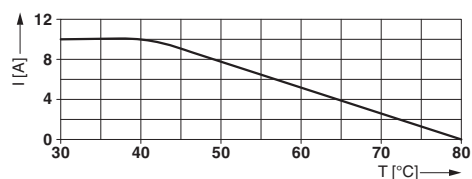


Dimensional drawing

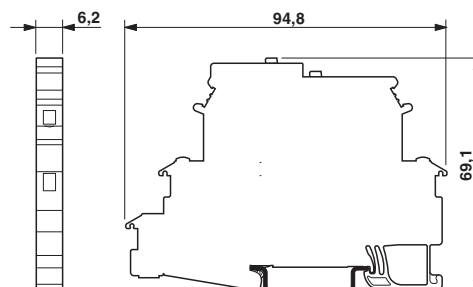

Surge protection device - TT-2-PE/S1-M-24DC - 2920638

Circuit diagram

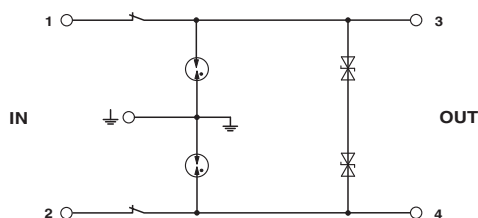

Approvals

Approvals

Approvals

EAC / EAC / UL Listed / DNV GL

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	---	---------------

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 138168
-----------	---	---

DNV GL	http://exchange.dnv.com/tari/	TAE00001N7
--------	---	------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>