

EMG 75-NZG/G 5/2 - Power supply unit



2941060

<https://www.phoenixcontact.com/pc/products/2941060>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Voltage regulator module, secondary switched-mode, default, input 10 V-29 V AC/ 12 V-30 V DC, output 5,1 V DC/2 A

Commercial data

Item number	2941060
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CMPL91
GTIN	4017918104542
Weight per piece (including packing)	289.8 g
Weight per piece (excluding packing)	276.5 g
Customs tariff number	85044083
Country of origin	DE

EMG 75-NZG/G 5/2 - Power supply unit



2941060

<https://www.phoenixcontact.com/pc/products/2941060>

Technical data

Product properties

Operating mode	100% operating factor
----------------	-----------------------

Input data

Nominal input voltage range	10 V AC ... 29 V AC
Input voltage range	12 V DC ... 30 V DC
Input voltage range DC	12 V DC ... 30 V DC
AC frequency range	50 Hz ... 60 Hz
Nominal power consumption	approx. 60 VA
Input fuse	4 A (slow-blow TR 5, internal, solderable)

Output data

Nominal output voltage	5 V DC $\pm 2\%$ (settable from 5.1 V DC ... 24.5 V DC)
Nominal output current (I_N)	2 A
Residual ripple	$\leq 400 \text{ mV}_{PP}$
Protective circuit	Electronic current limitation at 2.8 A; Varistor

Connection data

Input

Connection method	Screw connection
Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3

Output

Connection method	Screw connection
Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3

Signaling

Operating voltage display	Green LED
---------------------------	-----------

EMG 75-NZG/G 5/2 - Power supply unit



2941060

<https://www.phoenixcontact.com/pc/products/2941060>

Dimensions

Width	75 mm
Height	70.5 mm
Depth	75 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C

Mounting

Assembly instructions	Can be aligned with spacing = 5 mm
Mounting position	On horizontal DIN rail

EMG 75-NZG/G 5/2 - Power supply unit


2941060

<https://www.phoenixcontact.com/pc/products/2941060>



Drawings

Circuit diagram

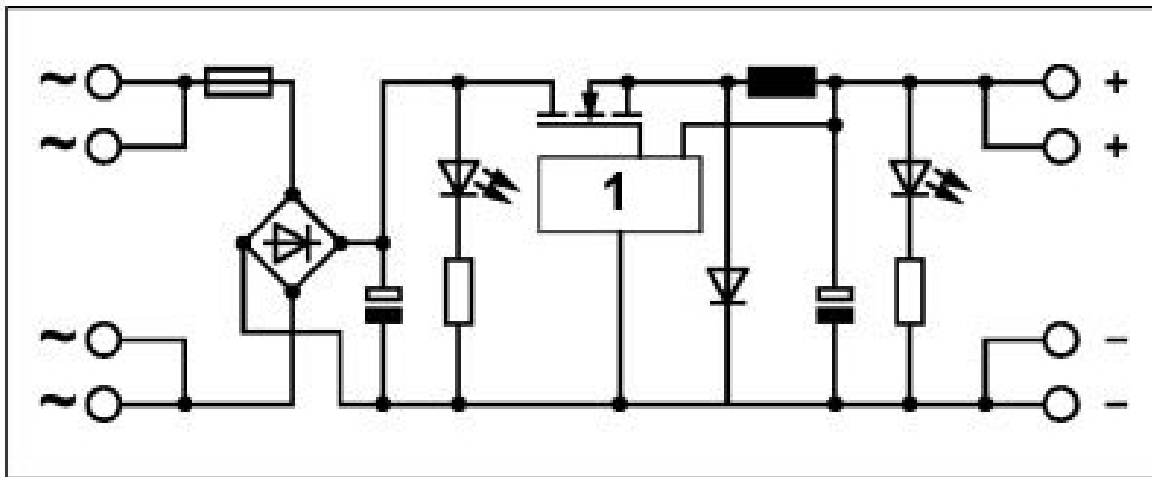


EMG 75-NZG/G 5/2 - Power supply unit

2941060

<https://www.phoenixcontact.com/pc/products/2941060>



Diagram

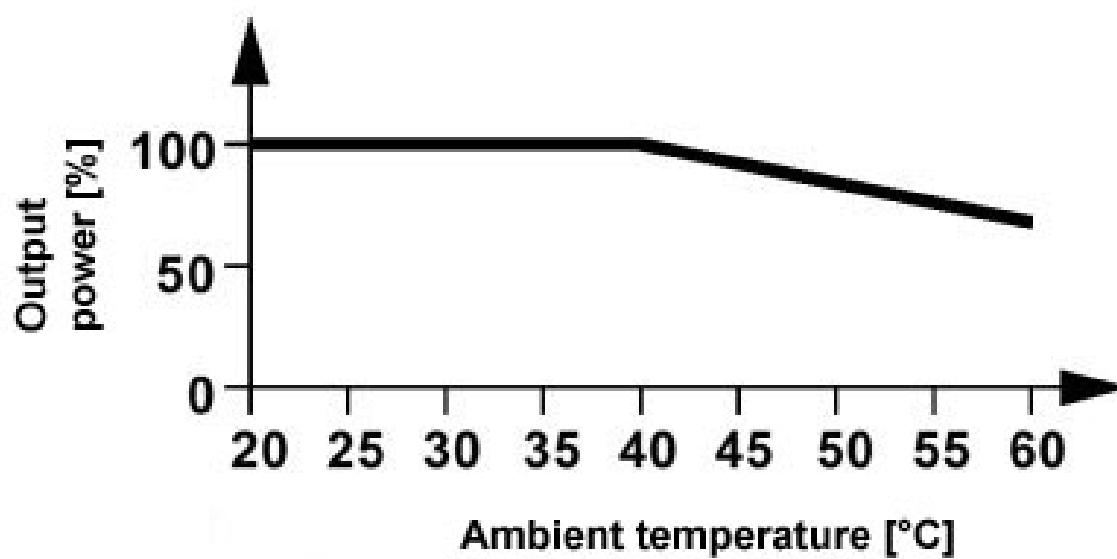

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com