

EMUG 22- 4REL/KSR-G 24/ 1 - Multiple relay module



2943754

<https://www.phoenixcontact.com/it/products/2943754>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay module, multi-channel, with 4 soldered-in miniature switching relays for DC voltage with light indicator and 1 N/O contact each, contact for medium to large loads, input voltage 24 V DC

Commercial data

Item number	2943754
Packing unit	5 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	CK6
Product key	CK6162
GTIN	4017918081300
Weight per piece (including packing)	86.4 g
Weight per piece (excluding packing)	82.6 g
Customs tariff number	85364190
Country of origin	DE

EMUG 22- 4REL/KSR-G 24/ 1 - Multiple relay module



2943754

<https://www.phoenixcontact.com/it/products/2943754>

Technical data

Product properties

Product type	Relay Module
Operating mode	100% operating factor
Mechanical service life	approx. 2×10^7 cycles

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	0.29 W
Test voltage (Winding/contact)	2.5 kV AC (50 Hz, 1 min., winding/contact)

Input data

Coil side

Nominal input voltage U_N	24 V DC
Input voltage range	19.2 V DC ... 26.4 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Drive and function	monostable
Typical input current at U_N	12 mA
Typical response time	6 ms
Typical release time	10 ms
Protective circuit	Damping diode, polarity protection; Damping diode, polarity protection diode
Operating voltage display	yes

Output data

Switching

Contact switching type	Single contact, 1 N/O contact
Type of switch contact	Single contact
Contact material	Silver cadmium oxide (AgCdO)
Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	6 A
Interrupting rating (ohmic load) max.	144 W (at 24 V DC)
	70 W (at 48 V DC)
	55 W (at 60 V DC)
	50 W (at 110 V DC)
	50 W (at 220 V DC)
	1500 VA (for 250 V AC)

EMUG 22- 4REL/KSR-G 24/ 1 - Multiple relay module



2943754

<https://www.phoenixcontact.com/it/products/2943754>

Dimensions

Width	22.5 mm
Height	60 mm
Depth	79 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
---------------------------------	------------------

Standards and regulations


Standards/regulations	IEC 60664
	IEC 60664A
	DIN VDE 0110
	DIN VDE 0109-11, draft
	DIN EN 50178/VDE 0160
	IEC 60255/DIN VDE 0435 (in relevant parts)

Mounting

Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any

Drawings

Circuit diagram

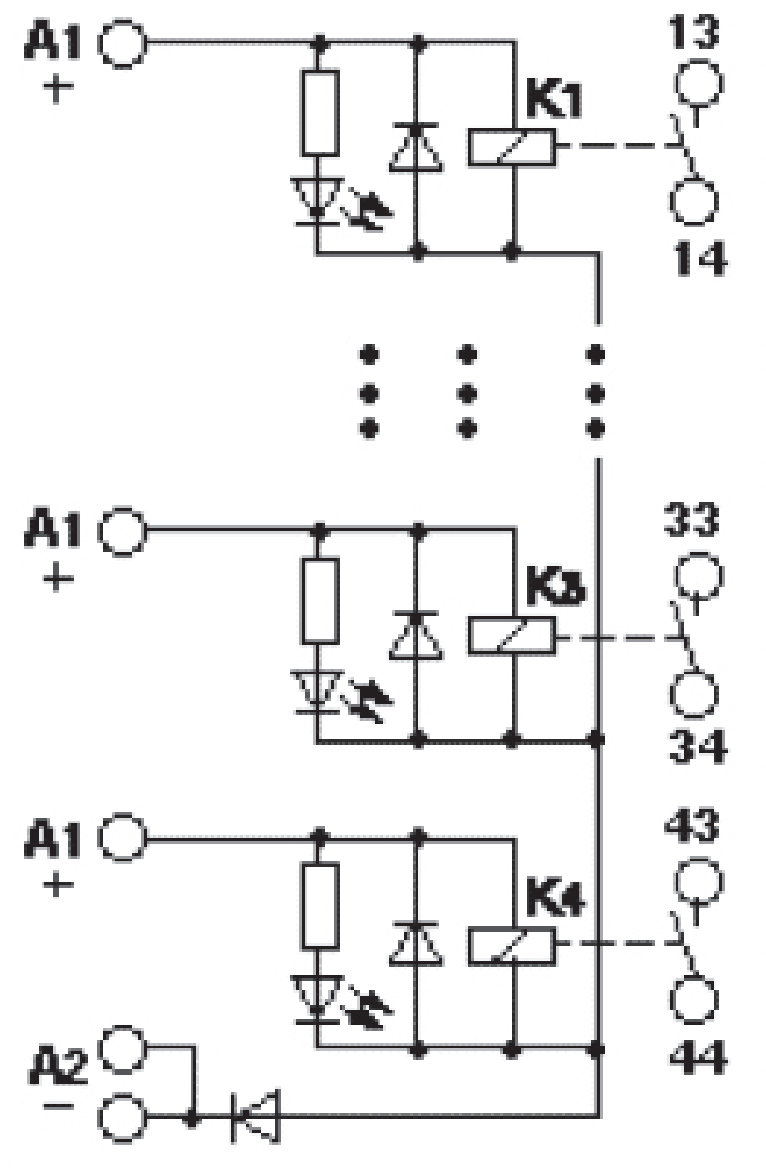

EMUG 22- 4REL/KSR-G 24/ 1 - Multiple relay module



2943754

<https://www.phoenixcontact.com/it/products/2943754>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

EMUG 22- 4REL/KSR-G 24/ 1 - Multiple relay module



2943754

<https://www.phoenixcontact.com/lt/products/2943754>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com