2950996

https://www.phoenixcontact.com/no/products/2950996

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay module, with 1 plug-in base for industrial relays size 1, contact: 4 changeover contacts, input voltage 24-48 V DC, with LED display, freewheeling and polarity protection diode

Commercial data

Item number	2950996
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	31BC61
Product key	CK6132
Catalog page	Page 104 (IF-2002)
GTIN	4017918084165
Weight per piece (including packing)	99.44 g
Weight per piece (excluding packing)	99.44 g
Customs tariff number	85364190
Country of origin	DE

PHŒNIX

2950996

https://www.phoenixcontact.com/no/products/2950996



Technical data

Notes

General	For the protection of relay coils and contacts, inductive loads must be dampened with an efficient protection circuit.
Product properties	
Product type	Relay socket
Insulation characteristics	
Overvoltage category	II
Pollution degree	2

Connection data

Input s	side
---------	------

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm ² 2.5 mm ²
Conductor cross section AWG	24 12

Output side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm ² 2.5 mm ²
Conductor cross section AWG	24 12

Dimensions

Width	45 mm
Height	75 mm
Depth	82.5 mm

Material specifications

green (RAL 0021)	Color	green (RAL 6021)
------------------	-------	------------------

Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-20 °C 50 °C
Ambient temperature (storage/transport)	-20 °C 70 °C

Mounting



https://www.phoenixcontact.com/no/products/2950996

Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any

PHŒNIX CONTACT




2950996 https://www.phoenixcontact.com/no/products/2950996



Drawings

Circuit diagram

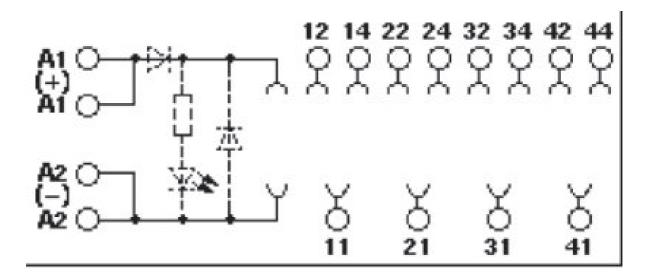

2950996

https://www.phoenixcontact.com/no/products/2950996



Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/no/products/2950996

EAC Approval ID: RU C-DE.A*30.B.01082

2950996

https://www.phoenixcontact.com/no/products/2950996



Classifications

ECLASS

ECLASS-11.0	27371603
ECLASS-12.0	27371603
ECLASS-13.0	27371603

ETIM

	ETIM 9.0	EC001456
UN	ISPSC	
	UNSPSC 21.0	39122300

2950996

https://www.phoenixcontact.com/no/products/2950996



Environmental product compliance

REACh SVHC China RoHS	Lead 7439-92-1
	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the
	manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT AS Strømsveien 344 N-1081 Oslo +47 22 07 68 00 norge@phoenixcontact.com