

# REL-MR-G 24/1 - Single relay

2961037

<https://www.phoenixcontact.com/us/products/2961037>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Pluggable replacement miniature relay, 1 N/O contact, input voltage 24 V DC



## Commercial data

Item number	2961037
Packing unit	8 pc
Minimum order quantity	8 pc
Note	Made to order (non-returnable)
Sales key	C460
Product key	CK6191
Catalog page	Page 524 (C-5-2019)
GTIN	4017918087074
Weight per piece (including packing)	6.675 g
Weight per piece (excluding packing)	4.387 g
Customs tariff number	85364190
Country of origin	DE

# REL-MR-G 24/1 - Single relay



2961037

<https://www.phoenixcontact.com/us/products/2961037>

## Technical data

### Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	approx. $2 \times 10^7$ cycles

### Electrical properties

Maximum power dissipation for nominal condition	0.12 W
Test voltage (Winding/contact)	2 kV AC (50 Hz, 1 min., winding/contact)

### Input data

#### Coil side

Nominal input voltage $U_N$	24 V DC
Input voltage range	19.2 V DC ... 26.4 V DC (20 °C)
Drive and function	monostable
Drive (polarity)	non-polarized
Typical input current at $U_N$	5 mA
Typical response time	5 ms
Typical release time	2 ms
Coil resistance	4800 $\Omega \pm 10 \%$

### Output data

#### Switching

Contact switching type	1 N/O contact
Type of switch contact	Double contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC 125 V DC
Minimum switching voltage	5 V DC
Limiting continuous current	3 A
Maximum inrush current	5 A
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	72 W (at 24 V DC) 60 W (at 48 V DC) 50 W (at 60 V DC) 50 W (at 110 V DC) 750 VA (for 230 V AC)

### Dimensions

Width	5 mm
Height	23 mm
Depth	17 mm

# REL-MR-G 24/1 - Single relay



2961037

<https://www.phoenixcontact.com/us/products/2961037>

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

## Standards and regulations

Standards/regulations	DIN VDE 0110
	IEC 255/DIN VDE 0435 (in relevant parts)

## Mounting

Mounting position	any
-------------------	-----

# REL-MR-G 24/1 - Single relay


2961037

<https://www.phoenixcontact.com/us/products/2961037>



## Drawings

### Schematic diagram

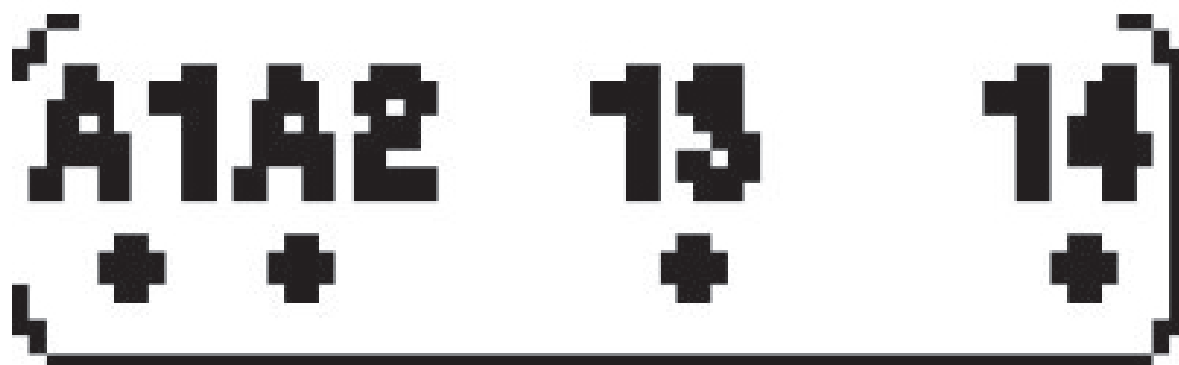


# REL-MR-G 24/1 - Single relay

2961037

<https://www.phoenixcontact.com/us/products/2961037>



Circuit diagram

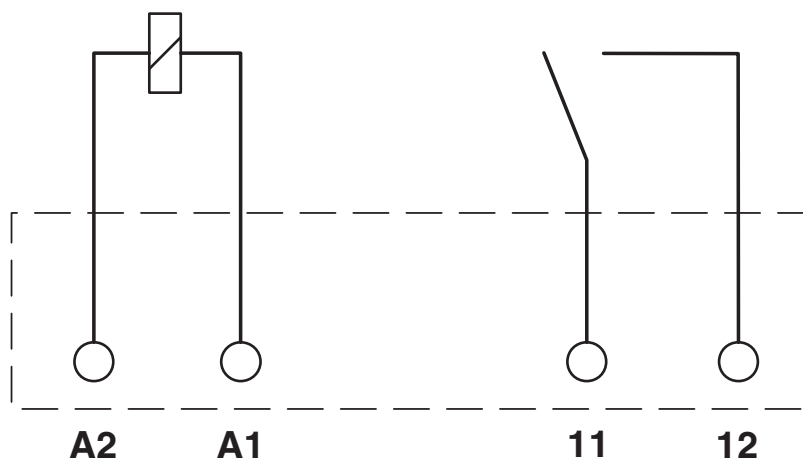

# REL-MR-G 24/1 - Single relay



2961037

<https://www.phoenixcontact.com/us/products/2961037>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2961037>



**EAC**

Approval ID: TR\_TS\_D\_00573\_c



**EAC**

Approval ID: RU\*C-DE.\*08.B.00010

# REL-MR-G 24/1 - Single relay



2961037

<https://www.phoenixcontact.com/us/products/2961037>

## Classifications

### ECLASS

ECLASS-11.0	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601

### ETIM

ETIM 8.0	EC001437
----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

# REL-MR-G 24/1 - Single relay



2961037

<https://www.phoenixcontact.com/us/products/2961037>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)