

UM 45-IB-DI/SIM8 - Interface module

2962997

<https://www.phoenixcontact.com/us/products/2962997>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE switch module, with COMBICON connector, for simulation, for 8 signals, for mounting DIN rail NS 35

Commercial data

Item number	2962997
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C422
Product key	CK2261
GTIN	4017918184643
Weight per piece (including packing)	84.6 g
Weight per piece (excluding packing)	52.6 g
Customs tariff number	85365019
Country of origin	DE

UM 45-IB-DI/SIM8 - Interface module



2962997

<https://www.phoenixcontact.com/us/products/2962997>

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE
Operating mode	100% operating factor

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics: Air clearances and creepage distances

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Operating voltage range	19.2 V DC ... 26.4 V DC
Current (per branch)	≤ 0.05 A
Current (Voltage supply)	≤ 0.4 A

Air clearances and creepage distances

Rated insulation voltage	50 V
Rated surge voltage	0.5 kV (1.2/50 µs)

Connection data

Connection 1 (control level)

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	14
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Connection 2 (field level)

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of positions	12
Conductor cross section rigid	0.14 mm² ... 1.5 mm²
Conductor cross section flexible	0.14 mm² ... 1.5 mm²
Conductor cross section AWG	26 ... 16

Signaling

Status display	Yellow LED
Status display present	Yes

UM 45-IB-DI/SIM8 - Interface module



2962997

<https://www.phoenixcontact.com/us/products/2962997>

Operating voltage display

Green LED

Dimensions

Item dimensions

Width

75 mm

Height

45 mm

Depth

41 mm

Material specifications

Color

green (RAL 6021)

Environmental and real-life conditions

Ambient conditions

Degree of protection (Module)

IP00

Degree of protection (Installation location)
--

≥ IP54

Ambient temperature (operation)

-20 °C ... 50 °C

Ambient temperature (storage/transport)

-20 °C ... 70 °C

Altitude

≤ 2000 m

Approvals

UKCA

Certificate

UKCA-compliant

Standards and regulations

Air clearances and creepage distances

Standards/regulations

EN IEC 60664-1

Mounting

Mounting type

DIN rail mounting

Mounting position

any

Notes

General

For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--

UM 45-IB-DI/SIM8 - Interface module




2962997

<https://www.phoenixcontact.com/us/products/2962997>

Drawings

Circuit diagram

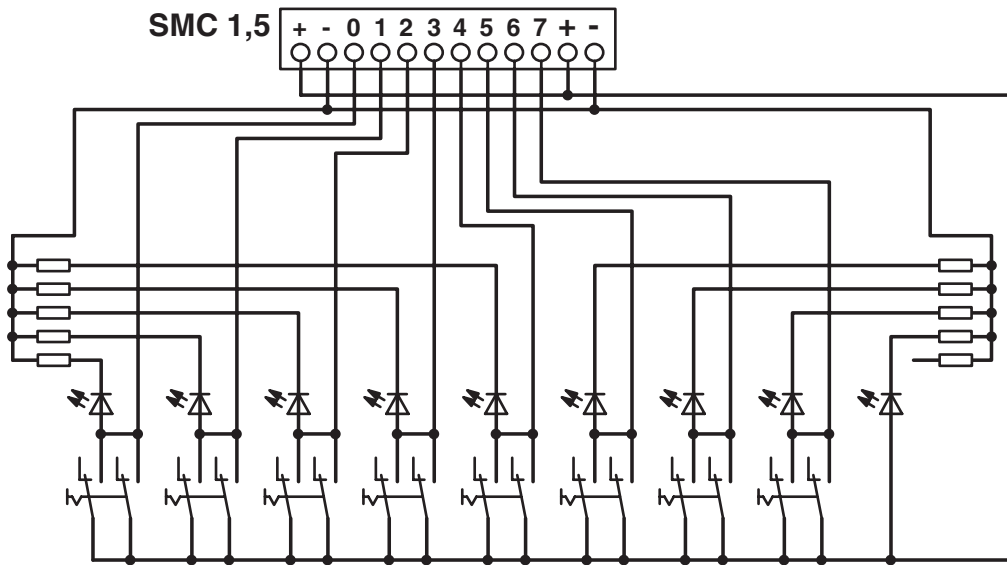

UM 45-IB-DI/SIM8 - Interface module



2962997

<https://www.phoenixcontact.com/us/products/2962997>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UM 45-IB-DI/SIM8 - Interface module



2962997
<https://www.phoenixcontact.com/us/products/2962997>

Environmental product compliance

REACH SVHC	Hexahydromethylphthalic anhydride
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com