

2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e in accordance with EN ISO 13849, single- or two-channel operation, 8 enabling current paths, $U_S = 24\text{ V DC}$, pluggable Push-in terminal block

Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Manually monitored and automatic activation in a single device
- 1- and 2-channel control
- 8 enabling current paths, 1 signaling current path

Commercial data

Item number	2963996
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	DNA114
Catalog page	Page 229 (C-6-2019)
GTIN	4017918904814
Weight per piece (including packing)	420.34 g
Weight per piece (excluding packing)	334.92 g
Customs tariff number	85371098
Country of origin	DE

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Technical data

Product properties

Product type	Safety relays
Product family	PSRclassic
Application	Emergency stop
	Safety door
Mechanical service life	approx. 10^7 cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Electrical properties

Maximum power dissipation for nominal condition	31.7 W ($U_S = 26.4$ V, $I_L^2 = 144$ A ² , $P_{Total\ max} = 2.9$ W + 28.8 W)
Nominal operating mode	100% operating factor

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V
Rated surge voltage/insulation	Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between A1/A2 and 63/64, 73/74, 83/84 between S10/S11/S12/S33/S34/S35 and 63/64, 73/74, 83/84 between 63/64, 73/74, 83/84 among one another

Input data

General

Rated control circuit supply voltage U_S	24 V DC -15 % / +10 %
Power consumption at U_S	typ. 2.4 W (DC)
Rated control supply current I_S	typ. 100 mA DC (at U_S)
Inrush current	3.5 A ($\Delta t = 2$ ms at U_S)
	max. 150 mA ($\Delta t = 1$ ms, with U_S/I_x at S10)
	max. 200 mA ($\Delta t = 1$ ms, with U_S/I_x at S12)
	max. -180 mA ($\Delta t = 1$ ms, with U_S/I_x at S22)
	< 10 mA (with U_S/I_x to S34)
	< 10 mA (with U_S/I_x to S35)
Current consumption	50 mA (with U_S/I_x to S10)
	50 mA (with U_S/I_x to S12)
	-50 mA (with U_S/I_x to S22)
	0 mA (with U_S/I_x to S34)
	1 mA (with U_S/I_x to S35)
Voltage at input/start and feedback circuit	24 V DC -15 % / +10 %
Filter time	2 ms (at A1 in the event of voltage dips at U_S)
	max. 1.5 ms (at S10, S12; test pulse width)
	7.5 ms (at S10, S12; test pulse rate)
	Test pulse rate = 5 x Test pulse width

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Typical response time	< 120 ms (automatic start)
	< 140 ms (manual start)
Typ. starting time with U_s	< 200 ms (when controlled via A1)
Typical release time	< 20 ms (when controlled via S11/S12 and S21/S22)
	< 50 ms (when controlled via A1)
Concurrence	∞
Recovery time	< 500 ms (following demand of the safety function)
	< 1 s (Boot time)
Maximum switching frequency	0.5 Hz
Protective circuit	Surge protection; Suppressor diode
Max. permissible overall conductor resistance	11 Ω (Input sensor circuit S10,S12,S22)
	50 Ω (S34,S35 start circuit input)
Operating voltage display	1 x green LED
Status display	2 x green LEDs

Output data

Contact switching type	8 enabling current paths
	1 signaling current path
Contact material	AgSnO ₂
Maximum switching voltage	250 V AC
Minimum switching voltage	5 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	6 A
Inrush current, minimum	10 mA
Sq. Total current	144 A ² (Enabling current paths)
	36 A ² (Signaling current path)
Switching capacity min.	50 mW
Switching capacity in accordance with IEC 60947-5-1	5 A (DC13)
	3 A (AC15)
	0.5 A (AC15)
Output fuse	10 A gL/gG (Enabling current paths)
	6 A gL/gG (Signaling current path)

Connection data

Connection technology	
pluggable	yes

Conductor connection	
Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

Dimensions

Width	45 mm
Height	112 mm
Depth	114.5 mm

Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

Characteristics

Safety data

Stop category	0
---------------	---

Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (3 A DC13; 3 A AC15; 8760 switching cycles/year)

Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

Approvals

CE

Certificate	CE-compliant
-------------	--------------

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 60947-1
-----------------------	----------------

Mounting


Mounting type	DIN rail mounting
Assembly instructions	See derating curve
Mounting position	vertical or horizontal

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996
<https://www.phoenixcontact.com/pc/products/2963996>

Drawings

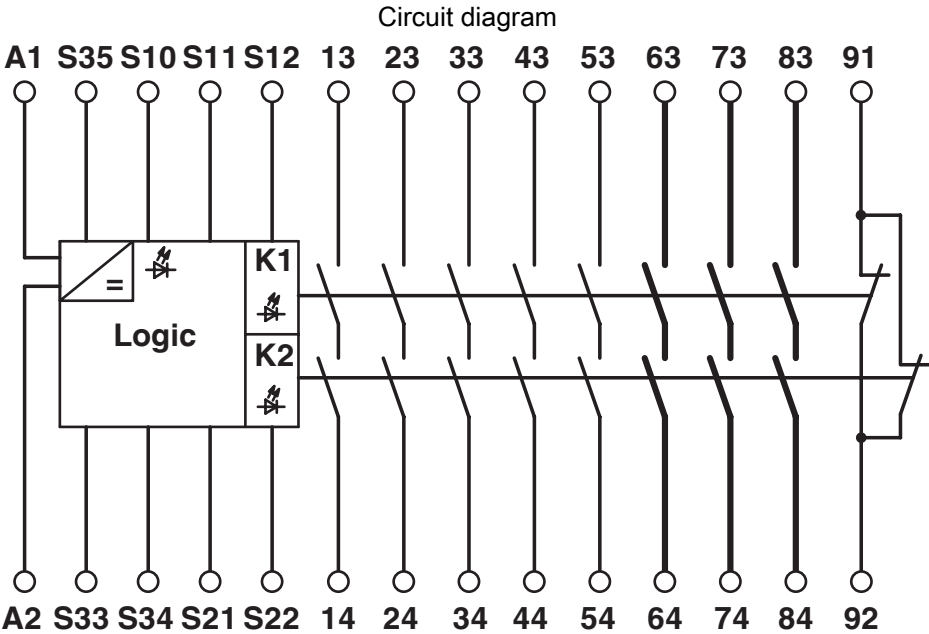

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays





2963996


<https://www.phoenixcontact.com/pc/products/2963996>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/2963996>

**EAC**
Approval ID: TR_TS_D_00573_c

**UL Listed**
Approval ID: FILE E 140324

**cUL Listed**
Approval ID: FILE E 140324

**Functional Safety**
Approval ID: 01/205/5363.03/22

**Functional Safety**
Approval ID: 968/EZ 622.03/22

cULus Listed

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/pc/products/2963996>

Classifications

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

ETIM

ETIM 9.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996
<https://www.phoenixcontact.com/pc/products/2963996>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	01173c64-6e5f-4621-878f-998922d82156

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com