


UMK- PVB 6 - Potential distributors



2972136
<https://www.phoenixcontact.com/it/products/2972136>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with six equipotential busbars (P1, P2, P3, P4, P5, P6) for potential distribution, for mounting on NS 35/7.5 or NS 32

Your advantages

- Consecutive numbering
- Separate supply
- Two potential levels

Commercial data

Item number	2972136
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK2
Product key	CK2272
Catalog page	Page 599 (C-5-2017)
GTIN	4017918088613
Weight per piece (including packing)	385 g
Weight per piece (excluding packing)	385 g
Customs tariff number	85369010
Country of origin	DE

Technical data

Notes

General	The necessary requirements for insulation (basic insulation or reinforced insulation) from adjacent modules (in DIN-rail direction) must be realized by applying suitable measures (e. g., partition plates).
General	Ensure that the supply voltage of the device has a common reference potential.
General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.

Product properties

Product type	Potential distributor
Product family	VARIOFACE
Potential connections	Per potential (P1...P6) 2 power/12 distributor terminal blocks

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics

Insulation	Functional insulation
Pollution degree	2

Electrical properties

Nominal voltage U_N	250 V AC/DC
Max. current carrying capacity per branch	16 A
Max. total current of all branches	16 A (per potential)
Rated insulation voltage	250 V
Rated surge voltage	2.5 kV

Input data

Potential connections	Per potential (P1...P6) 2 power/12 distributor terminal blocks
-----------------------	--

Connection data

Service Entrance

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of connections	6
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 10

UMK- PVB 6 - Potential distributors



2972136

<https://www.phoenixcontact.com/it/products/2972136>

Distribution

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Dimensions

Width	124 mm
Height	77 mm
Depth	71 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	EN 60664-1
-----------------------	------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

UMK- PVB 6 - Potential distributors


2972136

<https://www.phoenixcontact.com/it/products/2972136>



Drawings

Circuit diagram

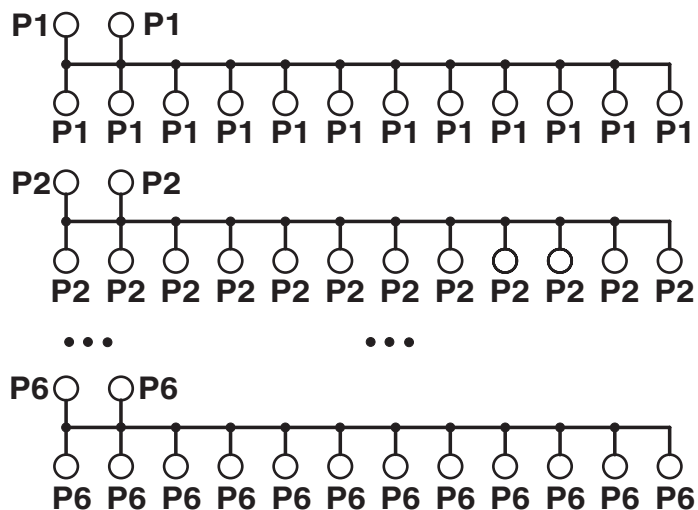

UMK- PVB 6 - Potential distributors



2972136

<https://www.phoenixcontact.com/lt/products/2972136>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/lt/products/2972136>



EAC

Approval ID: RU*DE.*09.B.00387/20

UMK- PVB 6 - Potential distributors



2972136

<https://www.phoenixcontact.com/it/products/2972136>

Classifications

ECLASS

ECLASS-11.0	27400609
ECLASS-12.0	27400609
ECLASS-13.0	27400609

ETIM

ETIM 9.0	EC001894
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UMK- PVB 6 - Potential distributors



2972136
<https://www.phoenixcontact.com/lt/products/2972136>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com