

Connectors IP67 16-32 A

Enclosure : Thermoplastic polyester (PBT)


Cable entry : Compression gland

Cable area for 16A : 1.0 - 2.5 mm²

Cable area for 32A : 2.5 - 6 mm²

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
2P+E	216C4W	4h	Yellow	100-130	50/60	2CMA166536R1000	1	0.22	16
2P+E	216C6W	6h	Blue	200-250	50/60	2CMA166538R1000	1	0.22	16
3P+N+E	432C6W	6h	Red	346-415	50/60	2CMA166618R1000	1	0.41	32

Dimensions

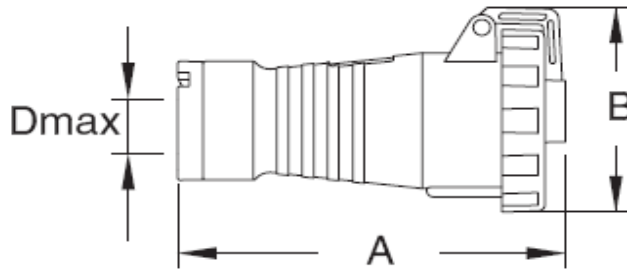

Type	A	B	D _{max}
216...W	170	97	17
232...W	182	109	21.5