


Plugs IP67 63-125 A

Enclosure : Thermoplastic polyester (PBT)
 Cable entry : Compression gland, internal and external cable clamp
 Cable area for 63 A : 4.0 - 16 mm²
 Cable area for 125 A : 16 - 50 mm²

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
3P+N+E	463P6W	6h	Red	346-415	50/60	2CMA166798R1000	1	0.75	63
3P+N+E	4125P6W	6h	Red	346-415	50/60	2CMA166828R1000	1	1.35	125

Dimensions

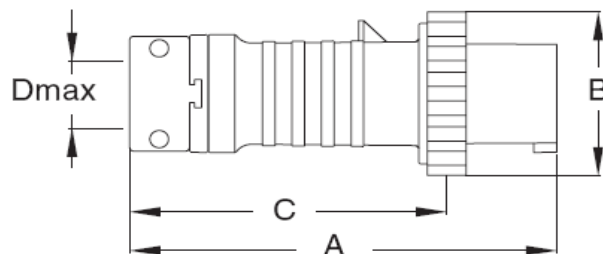

Type	A	B	C	Dmax
263-463P..W	275	114	213	41
2125-4125P..W	313	130	242	48