


Socket-outlet for panel mounting IP67 unified flange, straight 63 A

Enclosure : Thermoplastic (PBT)
Cable area : 6 - 25 mm²

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
3P+N+E	463RU6W	6h	Red	346-415	50/60	2CMA167396R1000	1	0.76	63

Dimensions

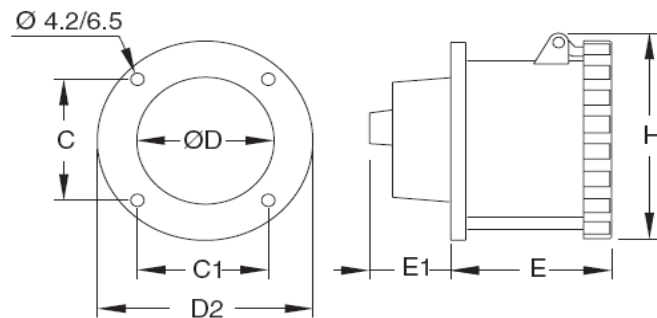

Type	C	C1	D	D2	E	E1	H
463RU..W	61	61	70	108	89	48	112