

## Surface socket-outlet IP44

Enclosure : Thermoplastic


Flexible membrane and metric threaded M20 insert for top cable entry.Rear knock-out cable entry.

Cable area for 16A : 1.5 - 4 mm<sup>2</sup>

Cable area for 32A : 2.5 - 10 mm<sup>2</sup>

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
2P+E	216RS4	4h	Yellow	100-130	50/60	2CMA193097R1000	10	0.190	16
2P+E	216RS6	6h	Blue	200-250	50/60	2CMA193098R1000	10	0.190	16
3P+N+E	416RS6	6h	Red	346-415	50/60	2CMA193115R1000	10	0.250	16
2P+E	232RS6	6h	Blue	200-250	50/60	2CMA193122R1000	10	0.300	32
3P+N+E	432RS6	6h	Red	346-415	50/60	2CMA193139R1000	10	0.340	32

### Dimensions

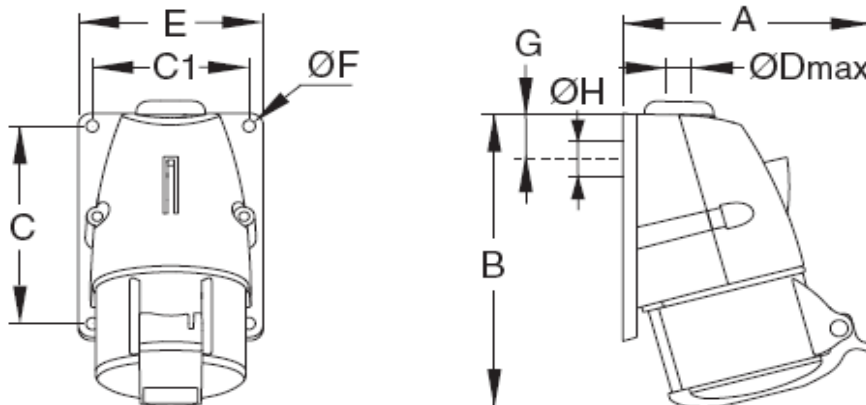

Type	A	B	C	C1	Dmax	E	F	G	H
216RS..	91	117	75	54	18/M20	66	5.5	27	23
316RS..	100	132	91	67	18/M20	79	5.5	30	23
416RS..	104	134	91	67	18/M20	79	5.5	30	23
232RS..	118	163	111	72	22/M25	85	5.5	34	29
332RS..	116	163	111	72	22/M25	85	5.5	34	29
432RS..	121	164	111	72	22/M25	85	5.5	34	29