


Socket-outlet for panel mounting IP44
unified flange, straight
16 A

Enclosure : Thermoplastic
Cable area : 1.5 - 4 mm²

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
2P+E	216RU6	6h	Blue	200-250	50/60	2CMA193170R1000	10	0.150	16

Dimensions

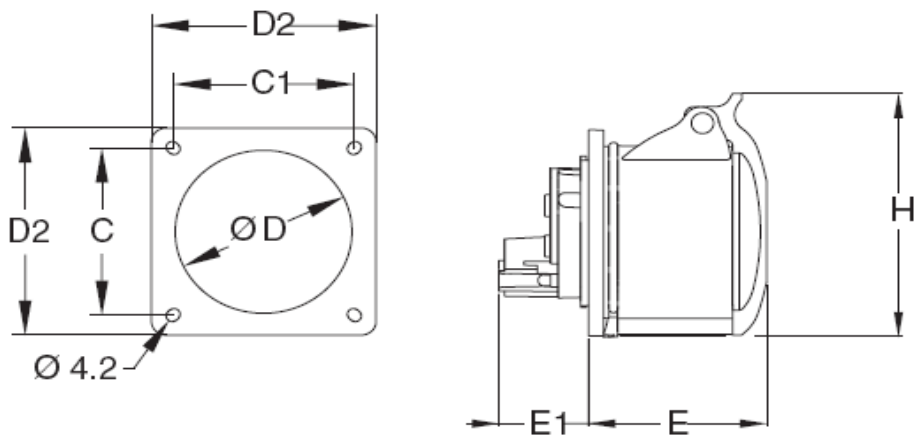

Type	C	C1	D	D2	E	E1	H
216RU..	60-61	60-61	49	75	56	29	79