


Connectors IP44 16-32 A

Enclosure : Polyamide
Cable entry : Compression gland
Cable area for 16A : 1 - 2.5 mm²
Cable area for 32A : 2.5 - 6 mm²

Terminals/ Poles	Type	Earthing position	Color code	Voltage V	Frequency Hz	Order Code	Pack. Qty	Weight kg/pce	Rated Current
2P+E	216-C4	4h	Yellow	100-130	50/60	2CMA193520R1000	1	0.157	16
2P+E	216-C6	6h	Blue	200-250	50/60	2CMA193521R1000	1	0.157	16
2P+E	232-C6	6h	Blue	200-250	50/60	2CMA193528R1000	1	0.258	32
3P+N+E	432-C6	6h	Red	346-415	50/60	2CMA193531R1000	1	0.300	32

Dimensions

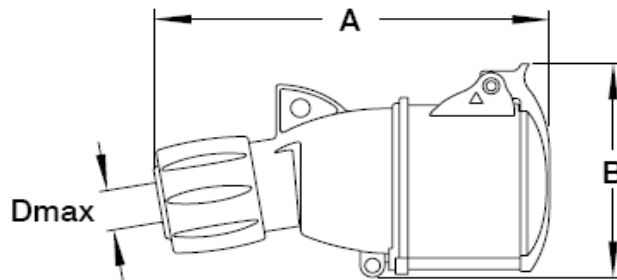

	216-C..	316-C..	416-C..	232-C..	332-C..	432-C..
A	134	154	154	177	177	177
B	75	86	90	96	96	100
Dmax	13	17	17	21.5	21.5	21.5