

SAFETY PRODUCTS

# Sense 6Z Series

## Magnetic Non-Contact Safety Switch

### Data Sheet

Sense 6Z is a magnetic non-contact safety switch used for interlocking doors and hatches.

The switch is mounted on the frame and the actuator on the moving part of the guard.

Sense 6Z offers an interlocking function reaching PLe/SIL 3 with low level coding. It also has a stainless-steel housing that is designed for harsh environments and extreme temperatures, suitable for splash zones in accordance with EHEDG guidelines.



#### Easy to install

**Compact size**

Compact in size to make it easy to position and hide on gates and hatches.

**Large sensing distance**

With a large sensing distance and a high tolerance for misalignment makes it easy to install.



#### Continuous operation

**Robust Design**

Stainless steel housing and integral back plate make it resistant to harsh environments with both dirt and water.

**No wear, no mechanical breakage**

Non-contact sensing means no mechanical wear and the large sensing tolerance gives a better tolerance to vibrations, resulting in fewer unwanted process stops.



#### Optimum Interface

**Small Design**

Small footprint makes it easy to install in restricted space.

**Industry Footprint**


Standard industry footprint for smaller magnetic non-contact switches.

**Ordering Information**

Description	Material Housing	Type	Order code
Sense 6Z, 2m cable, Rt, 2NC/1NO	Stainless Steel	Sense 6Z	2TLA050074R4120
Sense 6Z, 5m cable, Rt, 2NC/1NO	Stainless Steel	Sense 6Z	2TLA050074R5120
Sense 6Z, 10m cable, Rt, 2NC/1NO	Stainless Steel	Sense 6Z	2TLA050074R6120
Sense 6Z, QC cable, Rt, 2NC/1NO	Stainless Steel	Sense 6Z	2TLA050074R2120


Note: Quick connect M12 versions fitted with 250mm (10") cable

**Dimensions (in mm)**

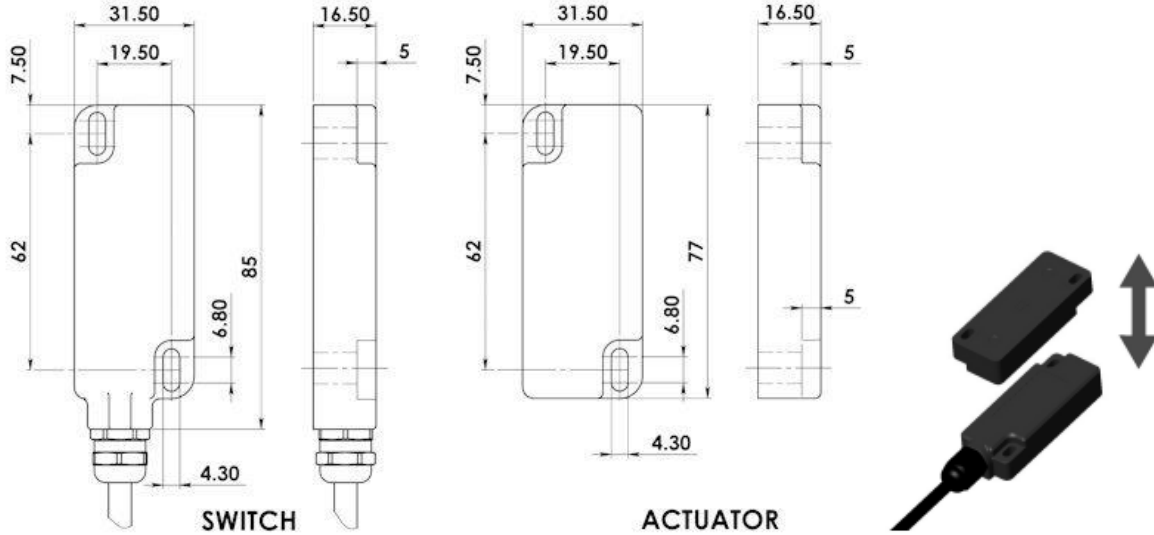

**Wiring**

Quick Connect (QC) M12 8pin	Flying Lead Colors	Circuit (Actuator Present)
2	Red	NC1
3	Blue	NC1
7	Black	NC2
1	White	Safety NC2
4	Yellow	Auxiliary NO
6	Green	Auxiliary NO

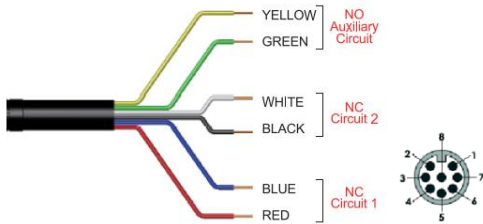

**Technical Data**

<b>Manufacturer</b>	
Address	ABB Electrification Sweden AB SE-721 61 Västerås Sweden
<b>Electrical characteristics</b>	
Minimum switched current	10VDC 1mA
Dielectric withstand	250 VAC
Safety channel 1-NC	250VAC 2A max. rating
Safety channel 2-NC	250VAC 2A max. rating
Safety channel 3-NO	24VDC 0.2 A max. rating
Insulation resistance	100 MOhms
Fuse	Internal 2.0A (F) External 1.6A (F) (User)
<b>General</b>	
Recommended setting gap	5 mm
Switching Distance (target to target)	S <sub>ao</sub> 8 mm close (ON) S <sub>ar</sub> 22 mm open (OFF)
Tolerance to misalignment	5 mm in any direction from 5 mm setting gap
Switching frequency	1.0 Hz maximum
Approach speed	200 mm/m to 1000 mm/s
Vibration resistance	IEC 68-2-6, 10-55 Hz 1 mm
Shock resistance	IEC 68-2-27, 11 ms, 30 g
Protection class	IP67, IP69K
Response Time (OFF)	<2ms
Cable Type	PVC 8 core 6 mm O.D
Ambient temperature	-25 °C to +70 °C, +105 °C for short duration during CIP/SIP cleaning
Size	85mm(length) x 31.5mm(width) x 16.5mm (height)
Material	316 Grade Stainless Steel
Color	Silver
Mounting Position	Any
Mounting Bolts	2 x M4 Tightening torque 1.0Nm
<b>Safety-related characteristic data and Conformity</b>	
Conformity	European Machinery Directive 2006/42/EC EN ISO 12100:2010, EN ISO 14119:2013, EN ISO 13849-1:2015, EN 60947-5-3:2013, EN60204-1
EN ISO 13849-1	Up to PLe Category 4 (if both channels are used with a PLe control device)
EN 62061	Up to SIL3 depending on system architecture
Coding Level according to EN ISO 14119	Low
<b>Safety data</b>	
B10d	3,300,000 cycles at 100mA load
Usage	8 cycles/hour 24hours/365 days per year MTTFd is 470 years
Certifications	TÜV, cULus
Information with regard to UL 508	Type 1 Enclosure Max. Temp: 70°C Maximum output 24V.dc 200mA. Powered by Class 2 or equivalent.

—  
ABB Inc.  
305 Gregson Drive  
Cary, North Carolina 27511  
United States  
electrification.us.abb.com/  
products/machine-motor-control

—  
We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

—  
We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.  
Copyright© 2022 ABB  
All rights reserved