


# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories)., With test socket screws for insertion of test plugs, nom. voltage: 500 V, nominal current: 41 A, 1 level, connection method: Bolt connection, Rated cross section: 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- The special clamping nuts can be actuated with a normal screwdriver
- Easy bridging and potential distribution using the patented plug-in bridges from the CLIPLINE complete system
- Quick and easy connection with fold-up hinged covers which hold the clamping nuts captive. With the covers folded open, the bolt is free to accept the cable lugs
- After closing and engaging the covers, the clamping nut automatically aligns with the threaded bolt and can be tightened easily.
- The screws are secured against loosening by captive spring-loaded spacers
- Large-surface labeling options in the terminal center and above the terminal points
- The use of the switching lock effectively prevents unintentional switching
- The hinged cover cover the live metal parts including the insulated cable lugs in the clamping area so that they are touch proof
- Testing with the standardized test adapters and test plugs of the CLIPLINE complete system

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3000565             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 25 pc               |
| Sales key                            | BE43                |
| Product key                          | BE4333              |
| Catalog page                         | Page 383 (C-1-2019) |
| GTIN                                 | 4055626019901       |
| Weight per piece (including packing) | 37.356 g            |
| Weight per piece (excluding packing) | 37.356 g            |
| Customs tariff number                | 85369010            |
| Country of origin                    | CN                  |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Technical data

### Notes

|         |                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------|
| General | Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories). |
|---------|-------------------------------------------------------------------------------------------------|

### Product properties

|                       |                                |
|-----------------------|--------------------------------|
| Product type          | Bolt connection terminal block |
| Area of application   | Machine building               |
|                       | Plant engineering              |
| Number of connections | 2                              |
| Number of rows        | 1                              |
| Potentials            | 1                              |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 1.31 W |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 6 mm <sup>2</sup> |
| Rated cross section AWG         | 10                |

### 1 level

|                                  |                                                                                           |
|----------------------------------|-------------------------------------------------------------------------------------------|
| Stripping length                 | The stripping length depends on the specification provided by the cable lug manufacturer. |
| Connection in acc. with standard | IEC 60947-7-1                                                                             |
| Nominal current                  | 41 A                                                                                      |
| Maximum load current             | 41 A                                                                                      |
| Nominal voltage                  | 500 V                                                                                     |
| Nominal cross section            | 6 mm <sup>2</sup>                                                                         |

### Disconnect slide

|              |    |
|--------------|----|
| Screw thread | M4 |
|--------------|----|

### Cable lug connection DIN 46234:1980-03

|                                  |                                           |
|----------------------------------|-------------------------------------------|
| Connection in acc. with standard | DIN 46234:1980-03                         |
| Cross section                    | 0.1 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Cross section range AWG          | 26 ... 10 (converted acc. to IEC)         |
| Hole diameter                    | 4.3 mm                                    |
| Width                            | 8 mm                                      |
| Bolt diameter                    | 4 mm                                      |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

|                                                  |                                           |
|--------------------------------------------------|-------------------------------------------|
| Screw thread                                     | M4                                        |
| Tightening torque                                | 1.5 ... 1.8 Nm                            |
| Connection in acc. with standard                 | DIN 46237:1970-07                         |
| Cross section                                    | 0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Cross section range AWG                          | 20 ... 10 (converted acc. to IEC)         |
| Hole diameter                                    | 4.3 mm                                    |
| Width                                            | 8 mm                                      |
| Bolt diameter                                    | 4 mm                                      |
| Screw thread                                     | M4                                        |
| Tightening torque                                | 1.5 ... 1.8 Nm                            |
| Identification color of ring cable lugs : red    | 1 mm <sup>2</sup>                         |
| Identification color of ring cable lugs : blue   | 2.5 mm <sup>2</sup>                       |
| Identification color of ring cable lugs : yellow | 6 mm <sup>2</sup>                         |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 12.3 mm |
| End cover width    | 2.2 mm  |
| Height             | 82.4 mm |
| Depth on NS 35/7,5 | 51 mm   |
| Depth on NS 35/15  | 58.5 mm |

## Material specifications

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Color                                                                   | gray        |
| Flammability rating according to UL 94                                  | V0          |
| Insulating material group                                               | I           |
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV      |
| Result                | Test passed |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Temperature-rise test

|                                                |                                     |
|------------------------------------------------|-------------------------------------|
| Requirement temperature-rise test              | Increase in temperature $\leq 45$ K |
| Result                                         | Test passed                         |
| Short-time withstand current 6 mm <sup>2</sup> | 0.72 kA                             |
| Result                                         | Test passed                         |

## Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV     |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35       |
| Test force setpoint     | 5 N         |
| Result                  | Test passed |

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |                                             |
|------------------------|---------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03         |
| Spectrum               | Service life test category 2, bogie-mounted |
| Frequency              | $f_1 = 5$ Hz to $f_2 = 250$ Hz              |
| ASD level              | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz   |
| Acceleration           | 3.12g                                       |
| Test duration per axis | 5 h                                         |
| Test directions        | X-, Y- and Z-axis                           |
| Result                 | Test passed                                 |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 30g                                 |
| Shock duration                 | 18 ms                               |
| Number of shocks per direction | 3                                   |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

|                 |                                   |
|-----------------|-----------------------------------|
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result          | Test passed                       |

## Ambient conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

# RT 4-T-P/P - Test disconnect terminal block


3000565

<https://www.phoenixcontact.com/us/products/3000565>



## Drawings

Connection diagram

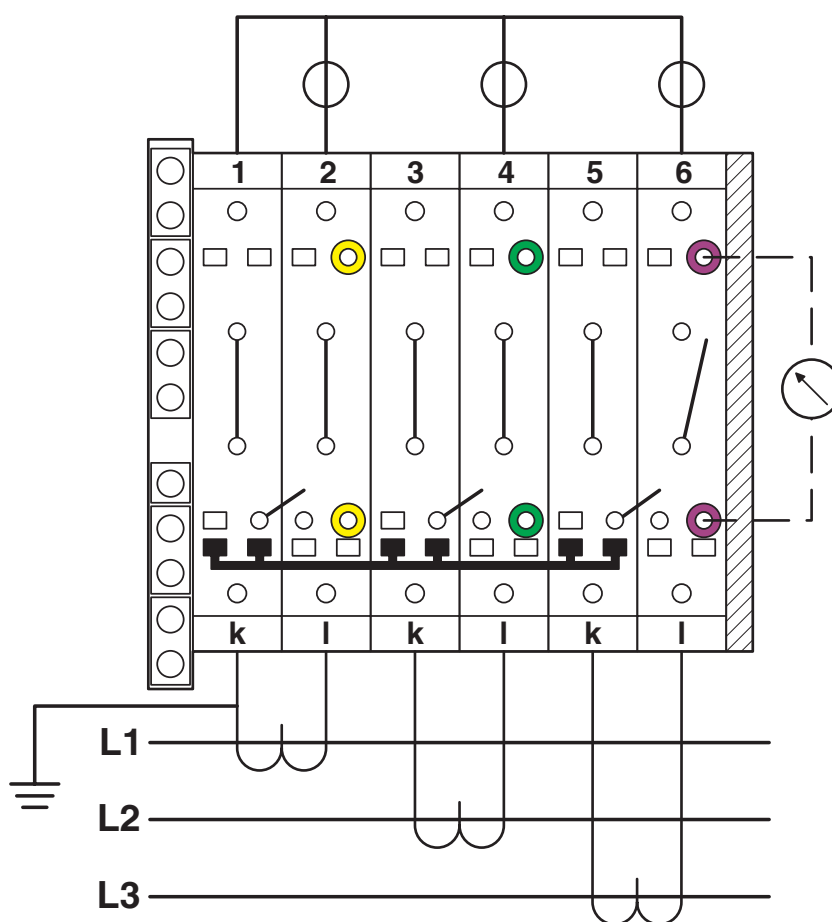

Three-phase transducer test set


# RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



Connection diagram

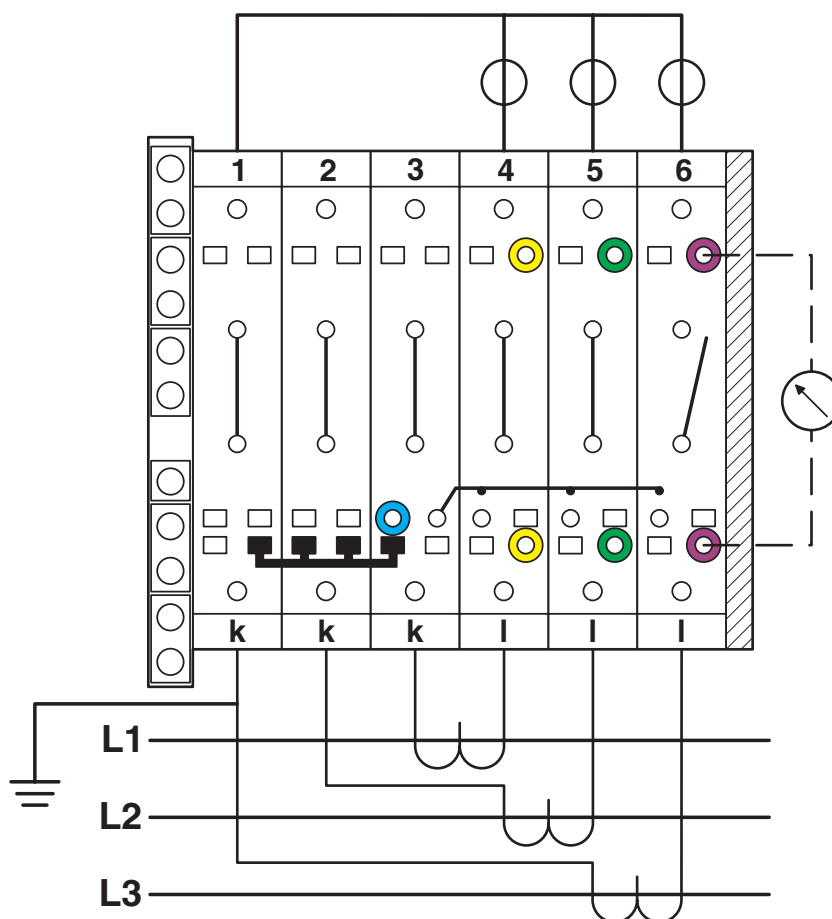

Three-phase linked transducer test set


# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

Circuit diagram

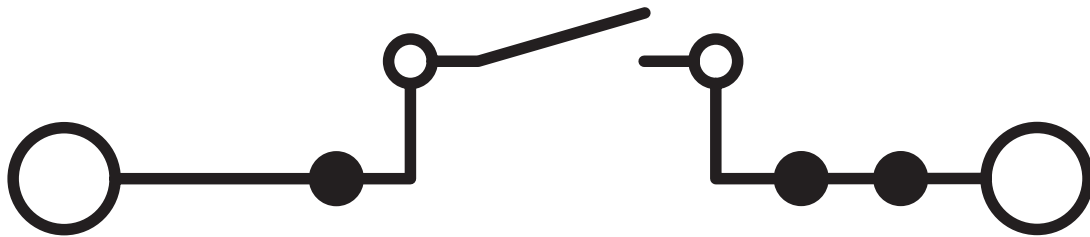




# RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



Connection diagram

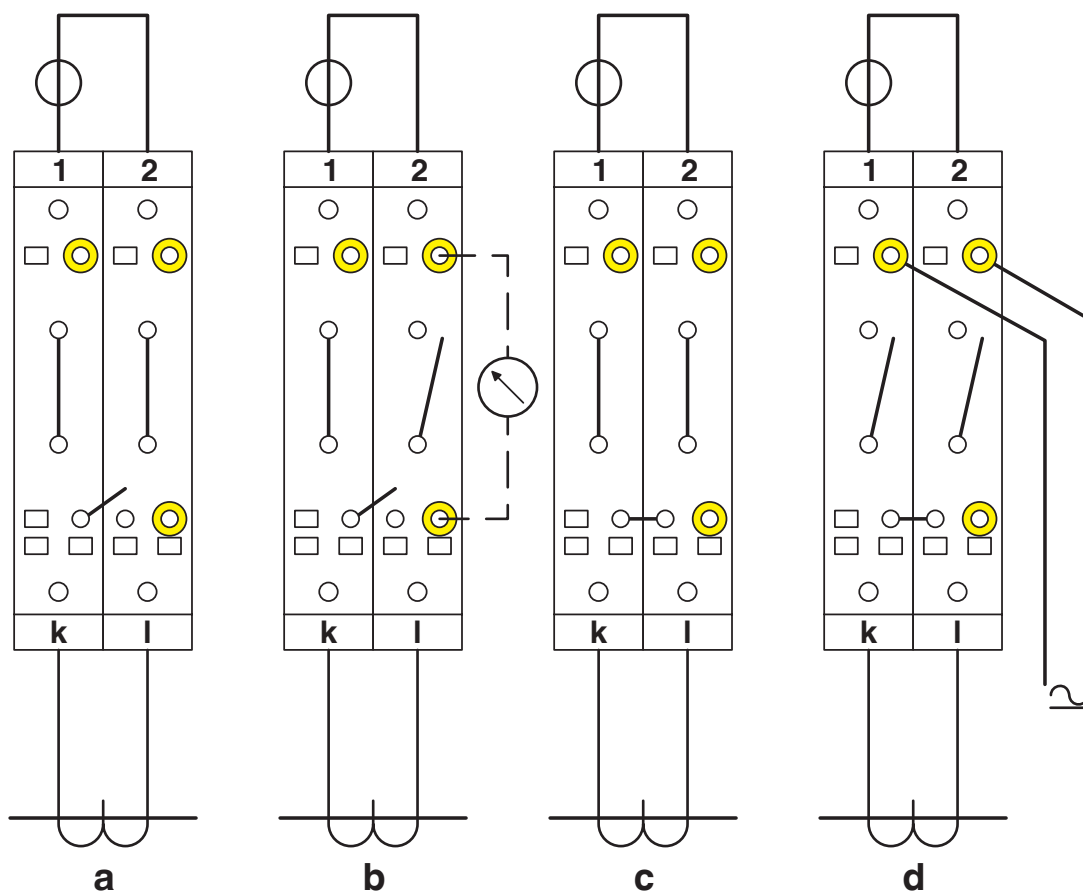

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer testing

d = relay testing

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3000565>

**EAC**

**EAC**  
Approval ID: RU C-DE.BL08.B.00540

|                                                                                                                                             |                       |                       |                   |                             |
|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div><b>cULus Recognized</b><br/>Approval ID: E60425</div> |                       |                       |                   |                             |
|                                                                                                                                             | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                                 |                       |                       |                   |                             |
|                                                                                                                                             | 600 V                 | 30 A                  | -                 | -                           |
| Use group C                                                                                                                                 |                       |                       |                   |                             |
|                                                                                                                                             | 600 V                 | 30 A                  | -                 | -                           |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141126 |
| ECLASS-13.0 | 27250101 |
| ECLASS-12.0 | 27141126 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000902 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

**i** Max. current carrying capacity: 32 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

**i** Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

---

## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A

---

## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A

---

## FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/us/products/3032224>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 32 A



# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

---

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## SB-ME 2-6 - Switching jumper

3035755

<https://www.phoenixcontact.com/us/products/3035755>



Switching jumper, pitch: 6.2 mm, number of positions: 2, length: 21 mm, color: gray/orange

 Max. current carrying capacity: 25 A

---

## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 32 A

# RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A

## RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

### D-RT 4-T - End cover

3000606

<https://www.phoenixcontact.com/us/products/3000606>

End cover, depth: 42.2 mm, width: 2.2 mm, height: 81.4 mm, color: gray



---

### TPNS-UK - Partition plate

0706647

<https://www.phoenixcontact.com/us/products/0706647>

Partition plate, depth: 70 mm, width: 2 mm, height: 80 mm, color: gray





## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## BE-RT 3/5 - Path extension

3049819

<https://www.phoenixcontact.com/us/products/3049819>



Path extension, color: gray

---

## S-URTK/SP - Switching lock

0311155

<https://www.phoenixcontact.com/us/products/0311155>



Switching lock, width: 8.2 mm, height: 12 mm, color: white

## RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

### LPS-6/E - Service connector

3270540

<https://www.phoenixcontact.com/us/products/3270540>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

---

### LPS-6 - Service connector

3270541

<https://www.phoenixcontact.com/us/products/3270541>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## LPO 4/E - Pick-up plug

3270519

<https://www.phoenixcontact.com/us/products/3270519>



Pick-up plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## LPO 4 - Pick-up plug

3270522

<https://www.phoenixcontact.com/us/products/3270522>



Pick-up plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

### NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

### NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

### NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

### NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

---

## ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

## RT 4-T-P/P - Test disconnect terminal block

3000565


<https://www.phoenixcontact.com/us/products/3000565>



## ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

## UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10



## RT 4-T-P/P - Test disconnect terminal block

3000565


<https://www.phoenixcontact.com/us/products/3000565>



## ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

---

## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red




---

### MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



---

### MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



---

### MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

---

## PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/us/products/3030996>



Test plug, Modular test plug, number of positions: 1, color: red

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/us/products/3038736>

Test plug, number of positions: 1, color: red



---

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray



# RT 4-T-P/P - Test disconnect terminal block



3000565

<https://www.phoenixcontact.com/us/products/3000565>

## E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



---

## E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



### PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

### PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## RT 4-T-P/P - Test disconnect terminal block

3000565

<https://www.phoenixcontact.com/us/products/3000565>



## SF-SL 0,8X4,0-100 - Screwdriver

1212551

<https://www.phoenixcontact.com/us/products/1212551>



Screwdriver, bladed (lasered), size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

## TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/us/products/3072821>



Separating plate, depth: 67.5 mm, width: 1 mm, height: 105.2 mm, color: gray

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)