

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Flat-type fuse terminal block, cross section: 0.2 - 6 mm², AWG: 26 - 8, width: 8.2 mm, color: black, with light indicator, voltage light indicator: 12 V DC, current light indicator: 2 mA

Your advantages

- Can be bridged with FBI ... fixed bridge
- For the use of KFZ flat-type fuses from the FSI/C series

Commercial data

Item number	3001925
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE12
Product key	BE1236
Catalog page	Page 499 (C-1-2019)
GTIN	4017918100964
Weight per piece (including packing)	21.12 g
Weight per piece (excluding packing)	21.12 g
Customs tariff number	85369095
Country of origin	TR

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Technical data

Product properties

Product type	Fuse terminal block
Number of positions	1
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Flat
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.31 W
Fuse	C
Voltage LED	12 V DC (LED red)
Current LED	2 mA DC (LED red)
Maximum current with single arrangement	30 A (special arrangements on request)

Input data

Voltage LED	12 V DC (LED red)
-------------	-------------------

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Cross section AWG	(converted acc. to IEC)

1 level

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	10 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm ² ... 10 mm ²
Cross section AWG	24 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 2.5 mm ²

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	30 A
Maximum load current	30 A
Nominal voltage	250 V
Nominal cross section	4 mm ²

Dimensions

Width	8.2 mm
Height	64 mm
Depth on NS 32	57 mm
Depth on NS 35/7,5	52 mm
Depth on NS 35/15	59.5 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

Drawings

Circuit diagram

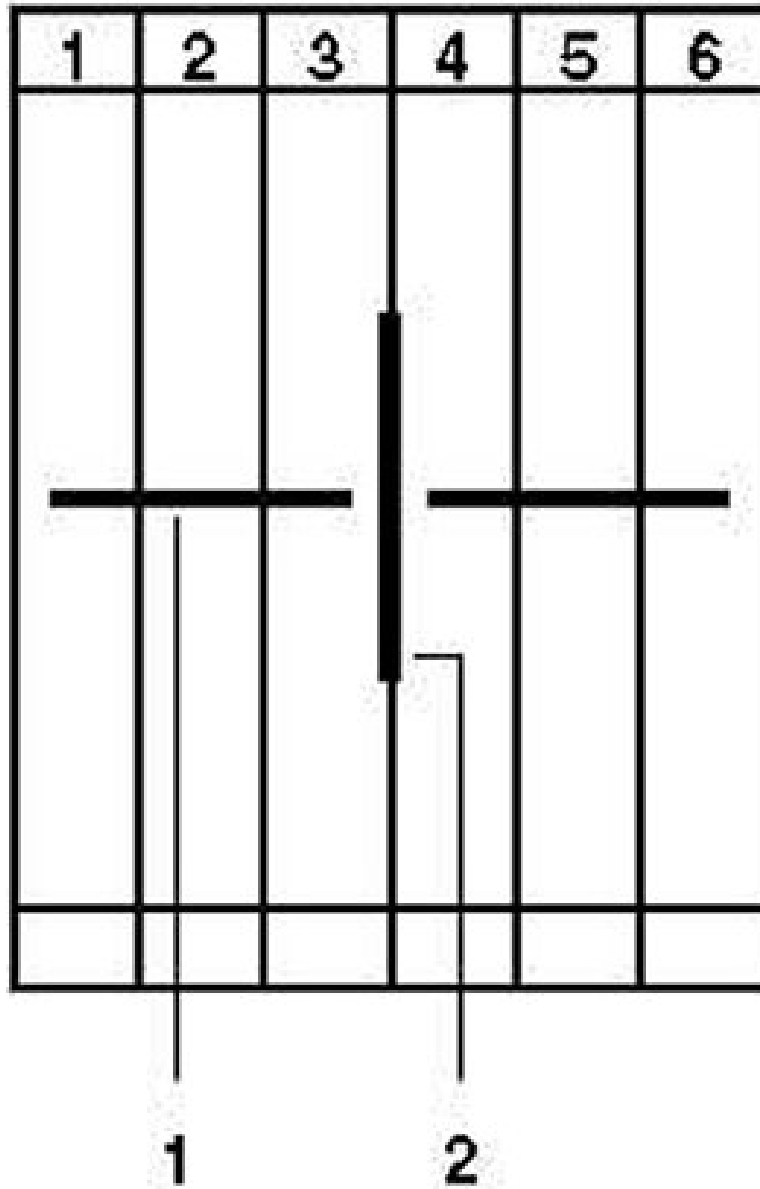

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3001925>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	12 V	30 A	26 - 8	-

 EAC Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	30 A	26 - 8	-
Use group C				
	300 V	30 A	26 - 8	-
Use group F				
	250 V	30 A	26 - 8	-
Use group D				
	600 V	5 A	26 - 8	-

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

Accessories

i Note: Applying some accessories below might limit this product.

FBI 2- 8 - Fixed bridge

0200020

<https://www.phoenixcontact.com/us/products/0200020>



Fixed bridge, pitch: 8 mm, number of positions: 2, color: silver

i Max. current carrying capacity: 34 A

FBI 3- 8 - Fixed bridge

0200059

<https://www.phoenixcontact.com/us/products/0200059>



Fixed bridge, pitch: 8 mm, number of positions: 3, color: silver

i Max. current carrying capacity: 34 A

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

FBI 4- 8 - Fixed bridge

0200046

<https://www.phoenixcontact.com/us/products/0200046>

Fixed bridge, pitch: 8 mm, number of positions: 4, color: silver



 Max. current carrying capacity: 34 A

FBI 10- 8 - Fixed bridge

0203263

<https://www.phoenixcontact.com/us/products/0203263>

Fixed bridge, pitch: 8 mm, number of positions: 10, color: silver



 Max. current carrying capacity: 34 A

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/us/products/0202154>




Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 57 A

EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/us/products/0202141>



Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 57 A

UK 6-FSI/C-LED12 - Fuse modular terminal block




3001925

<https://www.phoenixcontact.com/us/products/3001925>

EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/us/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 57 A

ISSBI 10- 8 - Bridge

0301534

<https://www.phoenixcontact.com/us/products/0301534>



Bridge, pitch: 8 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 38 A

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/us/products/0202142>

Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray



 Max. current carrying capacity: 57 A

EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/us/products/3072340>

Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray



 Max. current carrying capacity: 57 A

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/us/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 57 A

TS-KK 3 - Separating plate

2770215

<https://www.phoenixcontact.com/us/products/2770215>



Separating plate, depth: 16 mm, width: 0.5 mm, height: 14 mm, color: gray

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/us/products/1007235>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm

TCP 0,1A - Thermal device circuit breaker

0712107

<https://www.phoenixcontact.com/us/products/0712107>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 0,25A - Thermal device circuit breaker

0712123

<https://www.phoenixcontact.com/us/products/0712123>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 0,5A - Thermal device circuit breaker

0712152

<https://www.phoenixcontact.com/us/products/0712152>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 1A - Thermal device circuit breaker

0712194

<https://www.phoenixcontact.com/us/products/0712194>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 2A - Thermal device circuit breaker

0712217

<https://www.phoenixcontact.com/us/products/0712217>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 3A - Thermal device circuit breaker

0712233

<https://www.phoenixcontact.com/us/products/0712233>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 4A - Thermal device circuit breaker

0712259

<https://www.phoenixcontact.com/us/products/0712259>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



TCP 6A - Thermal device circuit breaker

0712275

<https://www.phoenixcontact.com/us/products/0712275>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 8A - Thermal device circuit breaker

0712291

<https://www.phoenixcontact.com/us/products/0712291>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 10A - Thermal device circuit breaker

0712314

<https://www.phoenixcontact.com/us/products/0712314>



Thermal miniature circuit breaker, pluggable in screw-type fuse terminal block UK 6-FSI/C and spring-cage fuse terminal block ST 4-FSI/C

TCP 5/DC32V - Thermal device circuit breaker

0700005

<https://www.phoenixcontact.com/us/products/0700005>



Thermal device circuit breaker, number of positions: 1, nominal current: 5 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 7,5/DC32V - Thermal device circuit breaker

0700007

<https://www.phoenixcontact.com/us/products/0700007>



Thermal device circuit breaker, number of positions: 1, nominal current: 7.5 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

TCP 10/DC32V - Thermal device circuit breaker

0700010

<https://www.phoenixcontact.com/us/products/0700010>



Thermal device circuit breaker, number of positions: 1, nominal current: 10 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 15/DC32V - Thermal device circuit breaker

0700015

<https://www.phoenixcontact.com/us/products/0700015>



Thermal device circuit breaker, number of positions: 1, nominal current: 15 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

TCP 20/DC32V - Thermal device circuit breaker

0700020

<https://www.phoenixcontact.com/us/products/0700020>



Thermal device circuit breaker, number of positions: 1, nominal current: 20 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

TCP 25/DC32V - Thermal device circuit breaker

0700025

<https://www.phoenixcontact.com/us/products/0700025>



Thermal device circuit breaker, number of positions: 1, nominal current: 25 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

TCP 30/DC32V - Thermal device circuit breaker

0700030

<https://www.phoenixcontact.com/us/products/0700030>



Thermal device circuit breaker, number of positions: 1, nominal current: 30 A, nom. voltage: 32 V, fuse type: Slow-blow, fuse type: Automatic device, mounting type: on base element

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925


<https://www.phoenixcontact.com/us/products/3001925>



ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>



UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UK 6-FSI/C-LED12 - Fuse modular terminal block




3001925

<https://www.phoenixcontact.com/us/products/3001925>

ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

UK 6-FSI/C-LED12 - Fuse modular terminal block

3001925

<https://www.phoenixcontact.com/us/products/3001925>




E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

SI FORM C 15 A DIN 72581 - Fuse

0913676

<https://www.phoenixcontact.com/us/products/0913676>



Flat-type plug-in fuse, type C, color code: light blue, nominal current: 15 A

UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SI FORM C 7,5 A DIN 72581 - Fuse

0913702

<https://www.phoenixcontact.com/us/products/0913702>

Flat-type plug-in fuse, type C, color code: brown, nominal current: 7.5 A



SI FORM C 10 A DIN 72581 - Fuse

0913715

<https://www.phoenixcontact.com/us/products/0913715>

Flat-type plug-in fuse, type C, color code: red, nominal current: 10 A



UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SI FORM C 25 A DIN 72581 - Fuse

0913757

<https://www.phoenixcontact.com/us/products/0913757>

Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A



SI FORM C 20 A DIN 72581 - Fuse

0913744

<https://www.phoenixcontact.com/us/products/0913744>

Flat-type plug-in fuse, type C, color code: yellow, nominal current: 20 A



UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SI FORM C 4 A DIN 72581 - Fuse

0913731

<https://www.phoenixcontact.com/us/products/0913731>

Flat-type plug-in fuse, type C, color code: pink, nominal current: 4 A



SI FORM C 3 A DIN 72581 - Fuse

0913773

<https://www.phoenixcontact.com/us/products/0913773>

Flat-type plug-in fuse, type C, color code: violet, nominal current: 3 A



UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SI FORM C 30 A DIN 72581 - Fuse

0913760

<https://www.phoenixcontact.com/us/products/0913760>

Flat-type plug-in fuse, type C, color code: light green, nominal current: 30 A



SI FORM C 2 A - Fuse

0913689

<https://www.phoenixcontact.com/us/products/0913689>

Flat-type plug-in fuse, type C, color code: gray, nominal current: 2 A



UK 6-FSI/C-LED12 - Fuse modular terminal block



3001925

<https://www.phoenixcontact.com/us/products/3001925>

SI FORM C 5 A DIN 72581 - Fuse

0913692

<https://www.phoenixcontact.com/us/products/0913692>



Flat-type plug-in fuse, type C, color code: light brown, nominal current: 5 A

SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com