

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 250 V, nominal current: 24 A, number of connections: 3, number of positions: 1, connection method: Screw/plug-in connection, 1 level, cross section: 0.2 mm² - 4 mm², mounting type: NS 32, NS 35/15, NS 35/7,5, color: gray

Commercial data

Item number	3002131
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1241
Catalog page	Page 323 (CL-2005)
GTIN	4017918090142
Weight per piece (including packing)	11.88 g
Weight per piece (excluding packing)	11.88 g
Customs tariff number	85369010
Country of origin	PL

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Technical data

Notes

General	Current and voltage are determined by the plug used.
General	
Note	With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.

Product properties

Product type	Feed-through terminal block
Product family	UK 3D-MSTBV
Number of positions	1
Pitch	5.08 mm
Number of connections	3
Number of rows	2
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0 W

Connection data

Number of connections per level	3
---------------------------------	---

1 level

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Internal cylindrical gage	A3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 1.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN	0.5 mm ² ... 1 mm ²

UK 3D-MSTBV-5,08 - Feed-through terminal block




3002131

<https://www.phoenixcontact.com/us/products/3002131>

ferrule with plastic sleeve	
Nominal current	24 A (terminal current - MSTB connection: 12 A)
Maximum load current	12 A (with 4 mm ² conductor cross section)
Nominal voltage	250 V

Dimensions

Dimensional drawing	
Width	5.08 mm
End cover width	2 mm
Height	60 mm
Depth on NS 32	54.5 mm
Depth on NS 35/7,5	49.5 mm
Depth on NS 35/15	57 mm
Pitch	5.08 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA
Contact surface	Tin Sn
Static insulating material application in cold	-40 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Electrical tests

Surge voltage test

Test voltage setpoint	4.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 2.5 mm ²	0.3 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.5 kV
-----------------------	--------

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Result	Test passed
--------	-------------

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

Result	Test passed
--------	-------------

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.2 mm ² / 0.2 kg
	2.5 mm ² / 0.7 kg
	4 mm ² / 0.9 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Service life test category 2, bogie-mounted
	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
	0.964 (m/s ²) ² /Hz
Acceleration	3.12g
	0.58g
Test duration per axis	5 h
	5 h
Test directions	X-, Y- and Z-axis
	X-, Y- and Z-axis
Result	Test passed
	Test passed

Shocks

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Specification	DIN EN 50155 (VDE 0115-200):2022-06
	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
	Half-sine
Acceleration	30g
	5g
Shock duration	18 ms
	30 ms
Number of shocks per direction	3
	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed
	Test passed

Ambient conditions


Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 32
	NS 35/15
	NS 35/7,5

Drawings

Dimensional drawing

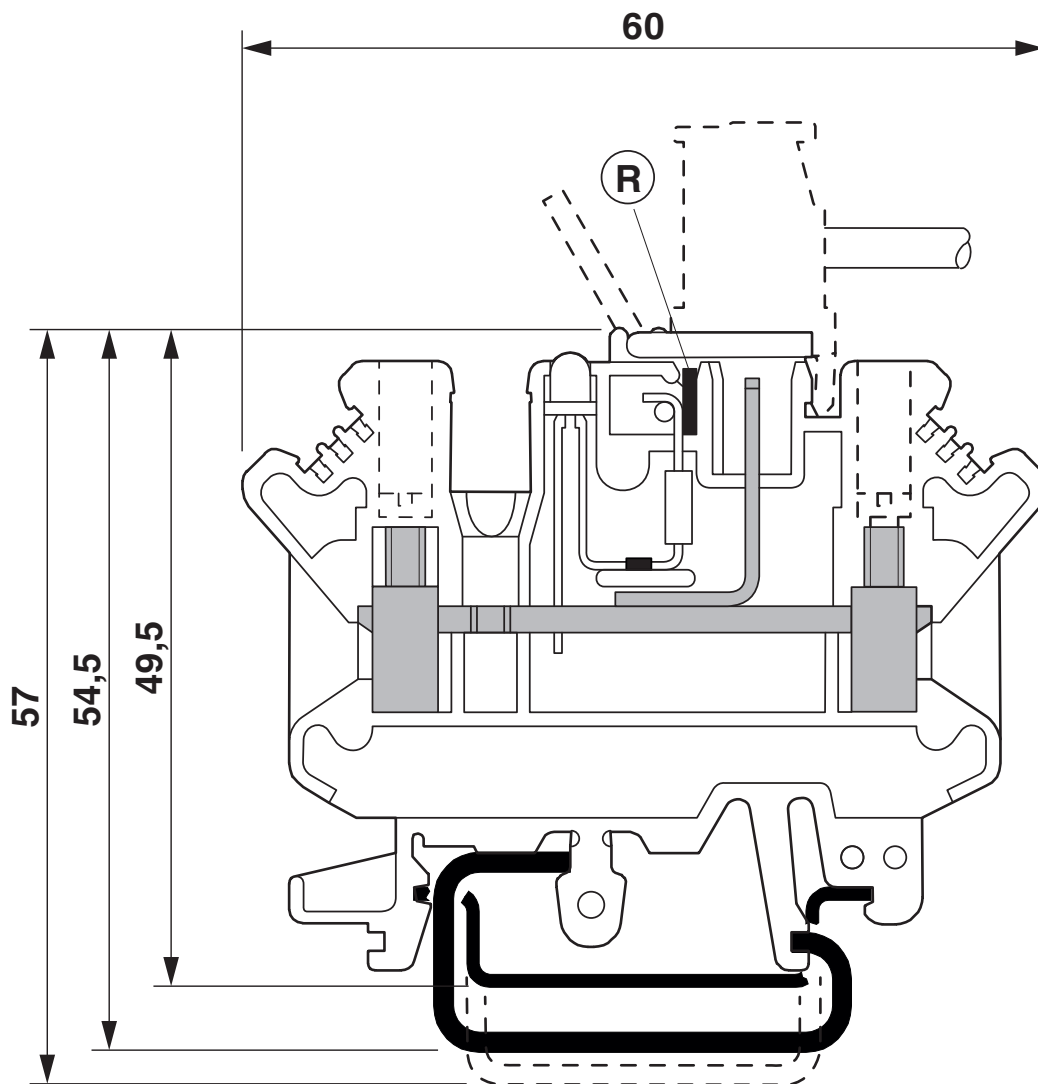

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3002131>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	300 V	20 A	28 - 12	-

 EAC Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	20 A	30 - 12	-
Use group F				
	250 V	20 A	30 - 12	-
Use group D				
	300 V	10 A	30 - 12	-

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131

<https://www.phoenixcontact.com/us/products/3002131>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UK 3D-MSTBV-5,08 - Feed-through terminal block



3002131
<https://www.phoenixcontact.com/us/products/3002131>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com