


UKH 95-PE/N - Installation ground terminal block



3009176

<https://www.phoenixcontact.com/in/products/3009176>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Installation ground terminal block, Screws with hexagonal socket, PE/N block, consisting of a green-yellow ground terminal and a blue terminal block with screw bridge, nom. voltage: 1000 V, nominal current: 232 A, Screw connection, cross section: 25 mm² - 95 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: green-yellow

Your advantages

- Reliable cable connection is ensured by three-point centering of the conductor in the prismatic sleeve base
- Low contact resistance of the contact surface due to ribbing
- Screw locking by means of spring-loaded elements in the clamping part

Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 3009176 |
| Packing unit | 5 pc |
| Minimum order quantity | 1 pc |
| Sales key | BE1 |
| Product key | BE1321 |
| Catalog page | Page 231 (CL-2005) |
| GTIN | 4017918091705 |
| Weight per piece (including packing) | 599.8 g |
| Weight per piece (excluding packing) | 599.8 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

Technical data

Notes

| | |
|---------|------------------------------|
| General | Screws with hexagonal socket |
|---------|------------------------------|

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Ground terminal block |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 7.54 W |

Connection data

| | |
|---------------------------------|--------------------|
| PEN function | yes |
| Grounding foot | Yes |
| Number of connections per level | 2 |
| Nominal cross section | 95 mm ² |
| Rated cross section AWG | 3/0 |

Level 1 above 1 below 1

| | |
|---|--|
| Screw thread | M8 |
| Note | Please observe the current carrying capacity of the DIN rails. |
| Tightening torque | 15 ... 20 Nm |
| Stripping length | 33 mm |
| Connection in acc. with standard | IEC 60947-7-2 |
| Conductor cross section rigid | 25 mm ² ... 95 mm ² |
| Cross section AWG | 2 ... 3/0 (converted acc. to IEC) |
| Conductor cross section flexible | 35 mm ² ... 95 mm ² |
| Conductor cross section, flexible [AWG] | 1/0 ... 3/0 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 35 mm ² ... 95 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 35 mm ² ... 95 mm ² |
| Nominal current | 232 A |
| Maximum load current | 232 A (with 95 mm ² conductor cross section) |
| Nominal voltage | 1000 V |
| Note | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area. |


Dimensions

UKH 95-PE/N - Installation ground terminal block



3009176

<https://www.phoenixcontact.com/in/products/3009176>

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 50 mm |
| Height | 83 mm |
| Depth on NS 32 | 104 mm |
| Depth on NS 35/7,5 | 99 mm |
| Depth on NS 35/15 | 106.5 mm |

Material specifications

| | |
|--|--------------|
| Color | green-yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |

Mechanical properties

General

| | |
|-------------------------|---|
| Terminal block mounting | 15 Nm ... 20 Nm (PE foot with mounting screw, M8) |
|-------------------------|---|

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

Mounting

| | |
|-------------------------|---|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |
| | NS 32 |
| Terminal block mounting | 15 Nm ... 20 Nm (PE foot with mounting screw, M8) |

UKH 95-PE/N - Installation ground terminal block


3009176

<https://www.phoenixcontact.com/in/products/3009176>



Drawings

Dimensional drawing

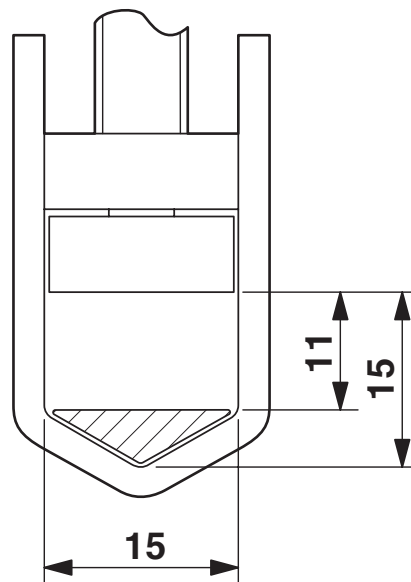

UKH 95-PE/N - Installation ground terminal block



3009176

<https://www.phoenixcontact.com/in/products/3009176>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/3009176>



EAC

Approval ID: RU C-DE.BL08.B.00534

UKH 95-PE/N - Installation ground terminal block



3009176

<https://www.phoenixcontact.com/in/products/3009176>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141125 |
| ECLASS-12.0 | 27141125 |
| ECLASS-13.0 | 27250110 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001329 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UKH 95-PE/N - Installation ground terminal block



3009176
<https://www.phoenixcontact.com/in/products/3009176>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in