

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Slide-type terminal block, with slide, nom. voltage: 400 V, nominal current: 41 A, number of connections: 2, connection method: Screw connection, 1 level, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Your advantages

- The URTK 6 test disconnect terminal block and the UGSK 6 slide-type terminal block were developed specifically for use in current transformer secondary circuits
- Can be fitted on both sides with fixed and switchable bridges as well as test sockets with 4 mm diameter

Commercial data

Item number	3026285
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE12
Product key	BE1233
Catalog page	Page 523 (C-1-2019)
GTIN	4017918168025
Weight per piece (including packing)	31.61 g
Weight per piece (excluding packing)	31.61 g
Customs tariff number	85369010
Country of origin	PL

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Nominal cross section	6 mm ²
-----------------------	-------------------

1 level

Screw thread	M4
Tightening torque	1.2 ... 1.4 Nm
Stripping length	10 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with same cross section, solid	0.5 mm ² ... 2.5 mm ²
2 conductors with same cross section, flexible	0.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm ² ... 2.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	41 A
Maximum load current	57 A (with 10 mm ² conductor cross section)
Nominal voltage	400 V
Nominal cross section	6 mm ²

Dimensions

Width	8.2 mm
Height	91 mm
Depth on NS 35/7,5	51 mm

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
-------------------------	-------------

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Test force setpoint	5 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32

UGSK 6 - Slide-type terminal block


3026285

<https://www.phoenixcontact.com/us/products/3026285>



Drawings

Circuit diagram

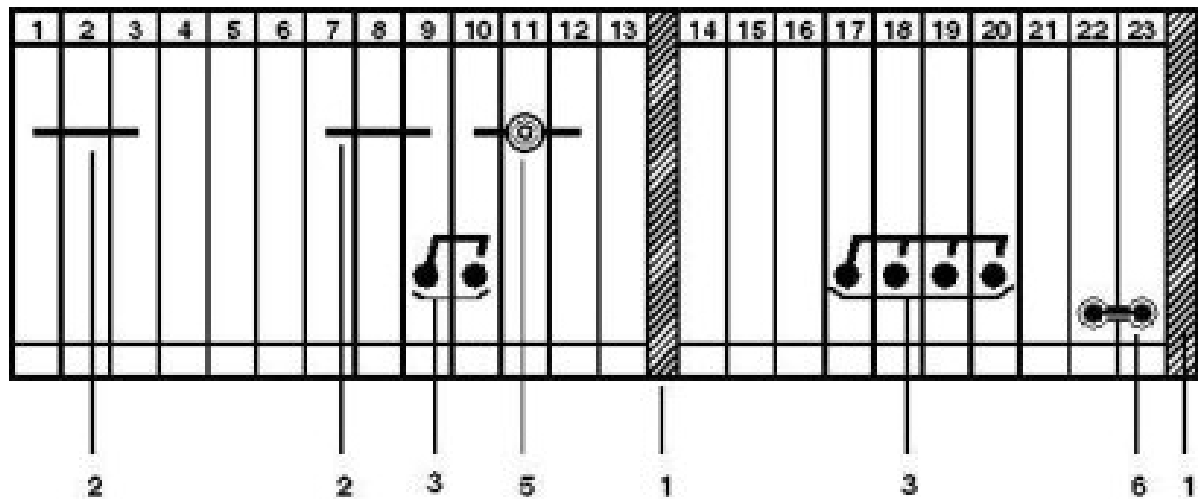

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



Circuit diagram



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3026285>

**EAC**

EAC
Approval ID: RU C-DE.BL08.B.00534

cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	300 V	50 A	26 - 8	-
Use group C				
	300 V	50 A	26 - 8	-

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 8.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UGSK 6 - Slide-type terminal block



3026285

<https://www.phoenixcontact.com/us/products/3026285>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



Accessories

i Note: Applying some accessories below might limit this product.

FBRI 10-8 N - Fixed bridge

2772080

<https://www.phoenixcontact.com/us/products/2772080>



Fixed bridge, pitch: 8.2 mm, number of positions: 10, color: silver

i Max. current carrying capacity: 45 A

SB 3-8-T - Switching jumper

3026492

<https://www.phoenixcontact.com/us/products/3026492>



Switching jumper, pitch: 8.2 mm, number of positions: 3, color: orange

i Max. current carrying capacity: 41 A

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



SB 10-8-T SO - Switching jumper

3026395

<https://www.phoenixcontact.com/us/products/3026395>

Switching jumper, pitch: 8.2 mm, number of positions: 10, color: orange



 Max. current carrying capacity: 41 A

SB 10-8-T - Switching jumper

3026382

<https://www.phoenixcontact.com/us/products/3026382>

Switching jumper, pitch: 8.2 mm, number of positions: 10, color: orange



 Max. current carrying capacity: 41 A

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>

SB 4-8-T - Switching jumper

3026379

<https://www.phoenixcontact.com/us/products/3026379>



Switching jumper, pitch: 8.2 mm, number of positions: 4, color: orange

 Max. current carrying capacity: 41 A

SB 2-8-T - Switching jumper

3026366

<https://www.phoenixcontact.com/us/products/3026366>



Switching jumper, pitch: 8.2 mm, number of positions: 2, color: orange

 Max. current carrying capacity: 41 A

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



D-URTK 6 - End cover

3026340

<https://www.phoenixcontact.com/us/products/3026340>

End cover, depth: 46.5 mm, width: 2 mm, height: 91 mm, color: gray



AP-ME

METER - Cover profile

3034361

<https://www.phoenixcontact.com/us/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>




APH-ME - Cover profile carrier

3034374

<https://www.phoenixcontact.com/us/products/3034374>

Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option



APT-ME - Cover profile carrier

3034358

<https://www.phoenixcontact.com/us/products/3034358>

Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



AH-ME - Covering hood

3240265

<https://www.phoenixcontact.com/us/products/3240265>



Cover, for the contact- and dust-protected encapsulation of the components

SCP 2-8 - Short-circuit connector

3070402

<https://www.phoenixcontact.com/us/products/3070402>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



SCP 3-8 - Short-circuit connector

3070403

<https://www.phoenixcontact.com/us/products/3070403>

Short-circuit connector, pitch: 8.15 mm, number of positions: 3, color: orange



SCP 4-8 - Short-circuit connector

3070404

<https://www.phoenixcontact.com/us/products/3070404>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



SCPI 2-8 - Short-circuit connector

3070423

<https://www.phoenixcontact.com/us/products/3070423>

Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange



SCPI 4-8 - Short-circuit connector

3070424

<https://www.phoenixcontact.com/us/products/3070424>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UGSK 6 - Slide-type terminal block

3026285


<https://www.phoenixcontact.com/us/products/3026285>



ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>




Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UGSK 6 - Slide-type terminal block

3026285


<https://www.phoenixcontact.com/us/products/3026285>



ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>




E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End bracket

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray



UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



E/UK 1 - End bracket

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

PSBJ-URTK 6 FARBLOS - Test plug strip

3026450

<https://www.phoenixcontact.com/us/products/3026450>



Test plug strip, number of positions: 1, color: transparent

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



PSBJ-URTK 6 RD - Test plug strip

3026719

<https://www.phoenixcontact.com/us/products/3026719>



Test plug strip, number of positions: 1, color: red

PSBJ-URTK 6 BU - Test plug strip

3026434

<https://www.phoenixcontact.com/us/products/3026434>



Test plug strip, number of positions: 1, color: blue

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



PSBJ-URTK 6 YE - Test plug strip

3026405

<https://www.phoenixcontact.com/us/products/3026405>



Test plug strip, number of positions: 1, color: yellow

PSBJ-URTK 6 GN - Test plug strip

3026418

<https://www.phoenixcontact.com/us/products/3026418>



Test plug strip, number of positions: 1, color: green

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



PSBJ-URTK 6 VT - Test plug strip

3026421

<https://www.phoenixcontact.com/us/products/3026421>



Test plug strip, number of positions: 1, color: violet

PSBJ-URTK 6 GY - Test plug strip

3026612

<https://www.phoenixcontact.com/us/products/3026612>



Test plug strip, number of positions: 1, color: gray

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



PSBJ-URTK 6 BK - Test plug strip

3026447

<https://www.phoenixcontact.com/us/products/3026447>



Test plug strip, number of positions: 1, color: black

PSBJ-URTK 6 BN - Test plug strip

3026971

<https://www.phoenixcontact.com/us/products/3026971>



Test plug strip, number of positions: 1, color: brown

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



PSBJ-URTK 6 WH - Test plug strip

3026448

<https://www.phoenixcontact.com/us/products/3026448>



Test plug strip, number of positions: 1, color: white

SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

UGSK 6 - Slide-type terminal block

3026285

<https://www.phoenixcontact.com/us/products/3026285>



SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/us/products/3072821>



Separating plate, depth: 67.5 mm, width: 1 mm, height: 105.2 mm, color: gray

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com