

3034264

https://www.phoenixcontact.com/us/products/3034264

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse terminal block for cartridge fuse insert, cross section: 0.5-10 mm², AWG: 20-8, width: 12.2 mm, color: Black

Commercial data

Item number	3034264
Packing unit	1 pc
Minimum order quantity	25 pc
Sales key	BE22
Product key	BE2235
Catalog page	Page 213 (CL-2009)
GTIN	4046356052818
Weight per piece (including packing)	26.318 g
Weight per piece (excluding packing)	25.047 g
Customs tariff number	85369095
Country of origin	PL



3034264

https://www.phoenixcontact.com/us/products/3034264

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics /
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W
Fuse	G / 5 x 20
LED voltage range	110 V AC 250 V AC
LED current range	0.5 mA 2.5 mA

Input data

LED voltage range	110 V AC 250 V AC	

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm²

Level 1 above 1

Level I above I	
Stripping length	12 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm² 10 mm²
Cross section AWG	20 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm² 6 mm²
Conductor cross section, flexible [AWG]	20 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm² 6 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm² 6 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm² 1.5 mm²
Nominal current	10 A
Maximum load current	10 A (with 4 mm² conductor cross section)
Nominal voltage	500 V
Nominal cross section	1.5 mm²

Level 1 below 1



3034264

https://www.phoenixcontact.com/us/products/3034264

Stripping length	10 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² 4 mm ²
Cross section AWG	24 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² 2.5 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm² 2.5 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm² 2.5 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	10 A
Maximum load current	10 A
Nominal voltage	500 V
Nominal cross section	1.5 mm ²

Dimensions

Width	12.2 mm
Height	71.5 mm
Depth on NS 35/7,5	51.3 mm
Depth on NS 35/15	58.8 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data	
Open side panel	No

Environmental and real-life conditions



3034264

https://www.phoenixcontact.com/us/products/3034264

Ambient conditions

Ambient temperature (operation)	-60 °C 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (storage/transport)	30 % 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/7,5




3034264

https://www.phoenixcontact.com/us/products/3034264

Drawings

Circuit diagram

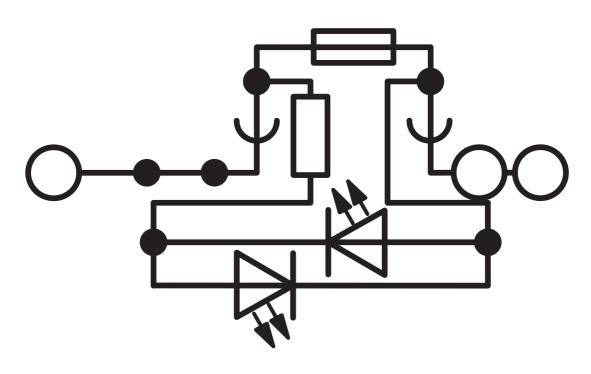




3034264

https://www.phoenixcontact.com/us/products/3034264

Application drawing

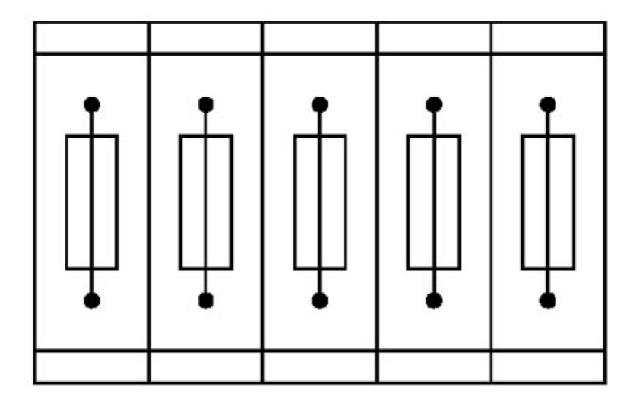


Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks



3034264

https://www.phoenixcontact.com/us/products/3034264

Application drawing

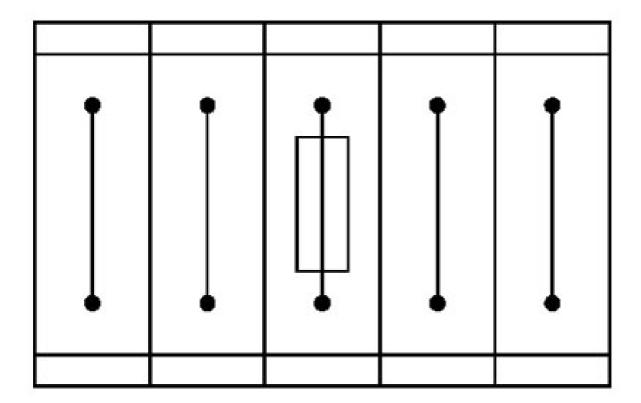

Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks



3034264

https://www.phoenixcontact.com/us/products/3034264

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3034264



IECEE CB Scheme

Approval ID: NL-23160



EAC

Approval ID: RU C-DE.BL08.B.00644



KEMA-KEUR

Approval ID: 71-104946

cULus Recogn Approval ID: E6042				
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
Use group B				
Output	600 V	10 A	24 - 12	-
Input	600 V	10 A	20 - 8	-
Use group C				
Output	600 V	10 A	24 - 12	-
Input	600 V	10 A	20 - 8	-



3034264

https://www.phoenixcontact.com/us/products/3034264

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113
ETIM	
ETIM 9.0	EC000899
UNSPSC	

39121400



3034264

https://www.phoenixcontact.com/us/products/3034264

Environmental product compliance

REACh SVHC	Lead 7439-92-1	
China RoHS	Environmentally Friendly Use Period = 50 years	
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"	



3034264

https://www.phoenixcontact.com/us/products/3034264

Accessories



Note: Applying some accessories below might limit this product.

FBS 2-6 - Plug-in bridge

3030336

https://www.phoenixcontact.com/us/products/3030336



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 24 A

FBS 3-6 - Plug-in bridge

3030242

https://www.phoenixcontact.com/us/products/3030242



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 4-6 - Plug-in bridge

3030255

https://www.phoenixcontact.com/us/products/3030255



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 24 A

FBS 5-6 - Plug-in bridge

3030349

https://www.phoenixcontact.com/us/products/3030349



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 10-6 - Plug-in bridge

3030271

https://www.phoenixcontact.com/us/products/3030271



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

Max. current carrying capacity: 24 A

FBS 20-6 - Plug-in bridge

3030365

https://www.phoenixcontact.com/us/products/3030365



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 6-6 - Plug-in bridge

1008238

https://www.phoenixcontact.com/us/products/1008238



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

Max. current carrying capacity: 24 A

FBS 2-6 BU - Plug-in bridge

3036932

https://www.phoenixcontact.com/us/products/3036932



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 3-6 BU - Plug-in bridge

3036945

https://www.phoenixcontact.com/us/products/3036945



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

Max. current carrying capacity: 24 A

FBS 4-6 BU - Plug-in bridge

3036958

https://www.phoenixcontact.com/us/products/3036958



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 5-6 BU - Plug-in bridge

3036961

https://www.phoenixcontact.com/us/products/3036961



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

1 Max. current carrying capacity: 24 A

FBS 10-6 BU - Plug-in bridge

3032198

https://www.phoenixcontact.com/us/products/3032198



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



3034264

https://www.phoenixcontact.com/us/products/3034264

FBS 20-6 BU - Plug-in bridge

3032208

https://www.phoenixcontact.com/us/products/3032208



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

1 Max. current carrying capacity: 24 A

FBS 50-6 BU - Plug-in bridge

3032211

https://www.phoenixcontact.com/us/products/3032211



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15





3034264

https://www.phoenixcontact.com/us/products/3034264

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

PS-6 - Test plug

3030996

https://www.phoenixcontact.com/us/products/3030996



Test plug, Modular test plug, number of positions: 1, color: red



3034264

https://www.phoenixcontact.com/us/products/3034264

PS-6/2,3MM RD - Test plug

3038736

https://www.phoenixcontact.com/us/products/3038736



Test plug, number of positions: 1, color: red

CLIPFIX 35 - End bracket

3022218

https://www.phoenixcontact.com/us/products/3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



3034264

https://www.phoenixcontact.com/us/products/3034264

CLIPFIX 35-5 - End bracket

3022276

https://www.phoenixcontact.com/us/products/3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray

E/NS 35 N - End bracket

0800886

https://www.phoenixcontact.com/us/products/0800886



End clamp, width: 9.5 mm, color: gray



3034264

https://www.phoenixcontact.com/us/products/3034264

E/UK - End bracket

1201442

https://www.phoenixcontact.com/us/products/1201442



End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray

E/UK 1 - End bracket

1201413

https://www.phoenixcontact.com/us/products/1201413



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray $\,$



3034264

https://www.phoenixcontact.com/us/products/3034264

PAI-4-FIX-5/6 BU - Test adapter

3035975

https://www.phoenixcontact.com/us/products/3035975



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 OG - Test adapter

3035974

https://www.phoenixcontact.com/us/products/3035974





3034264

https://www.phoenixcontact.com/us/products/3034264

PAI-4-FIX-5/6 YE - Test adapter

3035977

https://www.phoenixcontact.com/us/products/3035977



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 RD - Test adapter

3035976

https://www.phoenixcontact.com/us/products/3035976





3034264

https://www.phoenixcontact.com/us/products/3034264

PAI-4-FIX-5/6 GN - Test adapter

3035978

https://www.phoenixcontact.com/us/products/3035978



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 BK - Test adapter

3035980

https://www.phoenixcontact.com/us/products/3035980





3034264

https://www.phoenixcontact.com/us/products/3034264

PAI-4-FIX-5/6 GY - Test adapter

3035982

https://www.phoenixcontact.com/us/products/3035982



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 VT - Test adapter

3035979

https://www.phoenixcontact.com/us/products/3035979





3034264

https://www.phoenixcontact.com/us/products/3034264

PAI-4-FIX-5/6 BN - Test adapter

3035981

https://www.phoenixcontact.com/us/products/3035981



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 WH - Test adapter

3035983

https://www.phoenixcontact.com/us/products/3035983





3034264

https://www.phoenixcontact.com/us/products/3034264

SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/us/products/1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: $0.6 \times 3.5 \times 100$ mm, 2-component grip, with non-slip grip

ST-BW - Actuation tool

1207608

https://www.phoenixcontact.com/us/products/1207608



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com