


DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 41 A, number of connections: 2, connection method: Leg spring connection, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	3034413
Packing unit	50 pc
Minimum order quantity	1 pc
Product key	BE2233
Catalog page	Page 215 (CL-2009)
GTIN	4046356151832
Weight per piece (including packing)	21.63 g
Weight per piece (excluding packing)	20.694 g
Customs tariff number	85369010
Country of origin	PL

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Technical data

Product properties

Product type	Feed-through terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
---------------------	------

Connection data

Number of connections per level	2
Nominal cross section	6 mm ²
Stripping length	12 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	20 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	41 A
Maximum load current	30 A (with 10 mm ² conductor cross section)
Nominal voltage	500 V
Nominal cross section	6 mm ²

Connection cross sections directly pluggable

Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 6 mm ²

Dimensions

Width	8.2 mm
Height	49.6 mm

Material specifications

Color	gray
-------	------

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm ²	0.72 kA
Short-time withstand current 10 mm ²	1.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	5 N
Result	Test passed

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm ² / 0.3 kg
	6 mm ² / 1.4 kg
	10 mm ² / 2 kg
Result	Test passed

Environmental and real-life conditions

Aging

Temperature cycles	192
Result	Test passed

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	1.857 (m/s ²) ² /Hz
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

DTMED 6 - Feed-through terminal block


3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Drawings

Circuit diagram

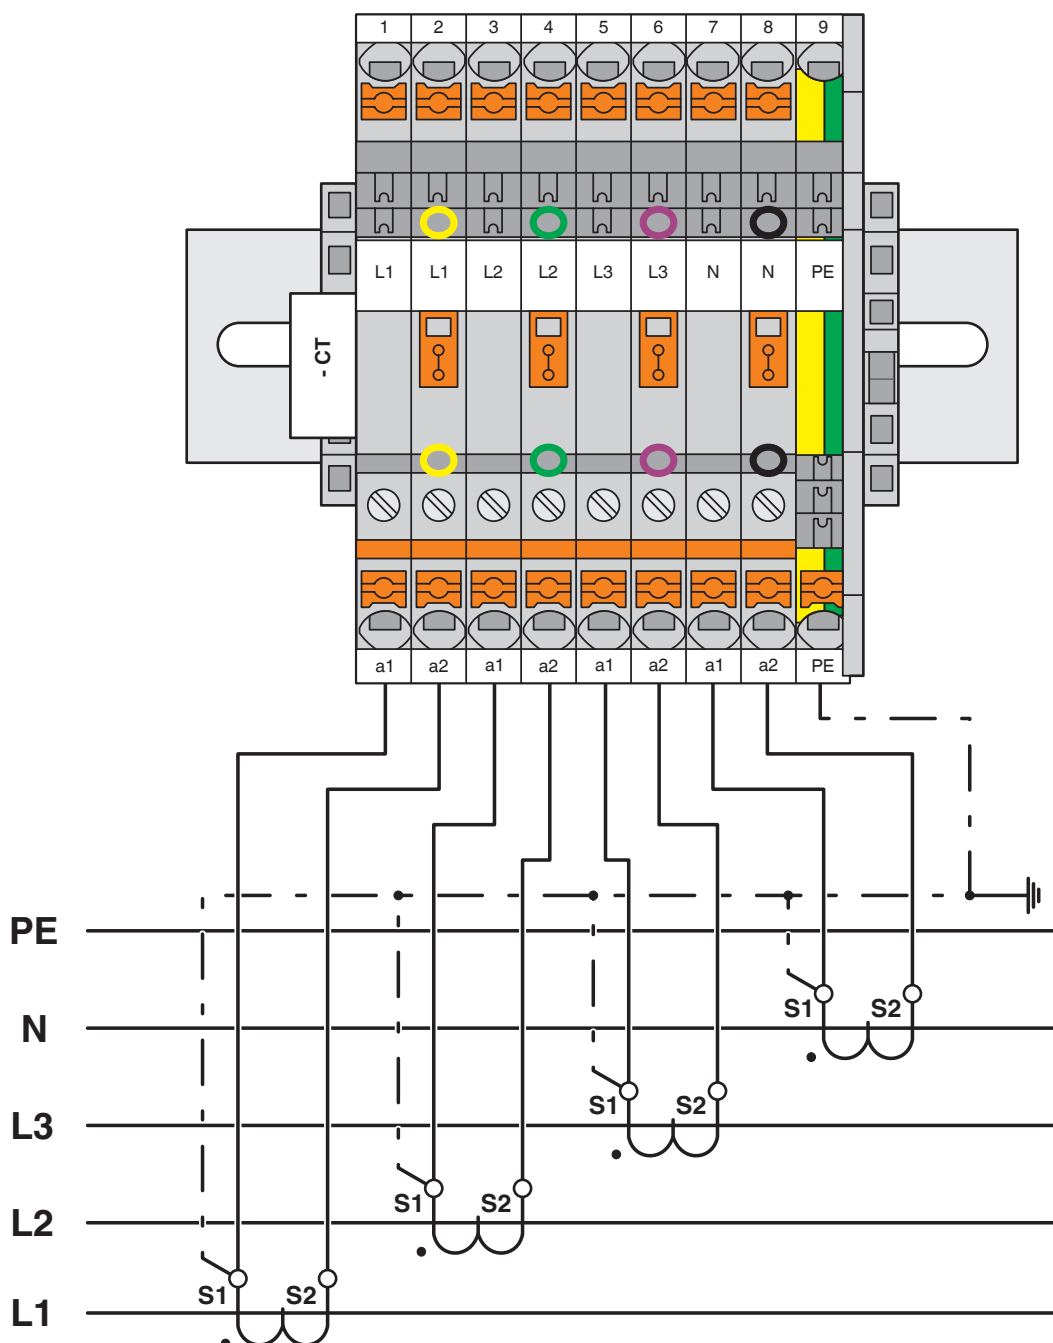

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Circuit diagram




DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Connection diagram

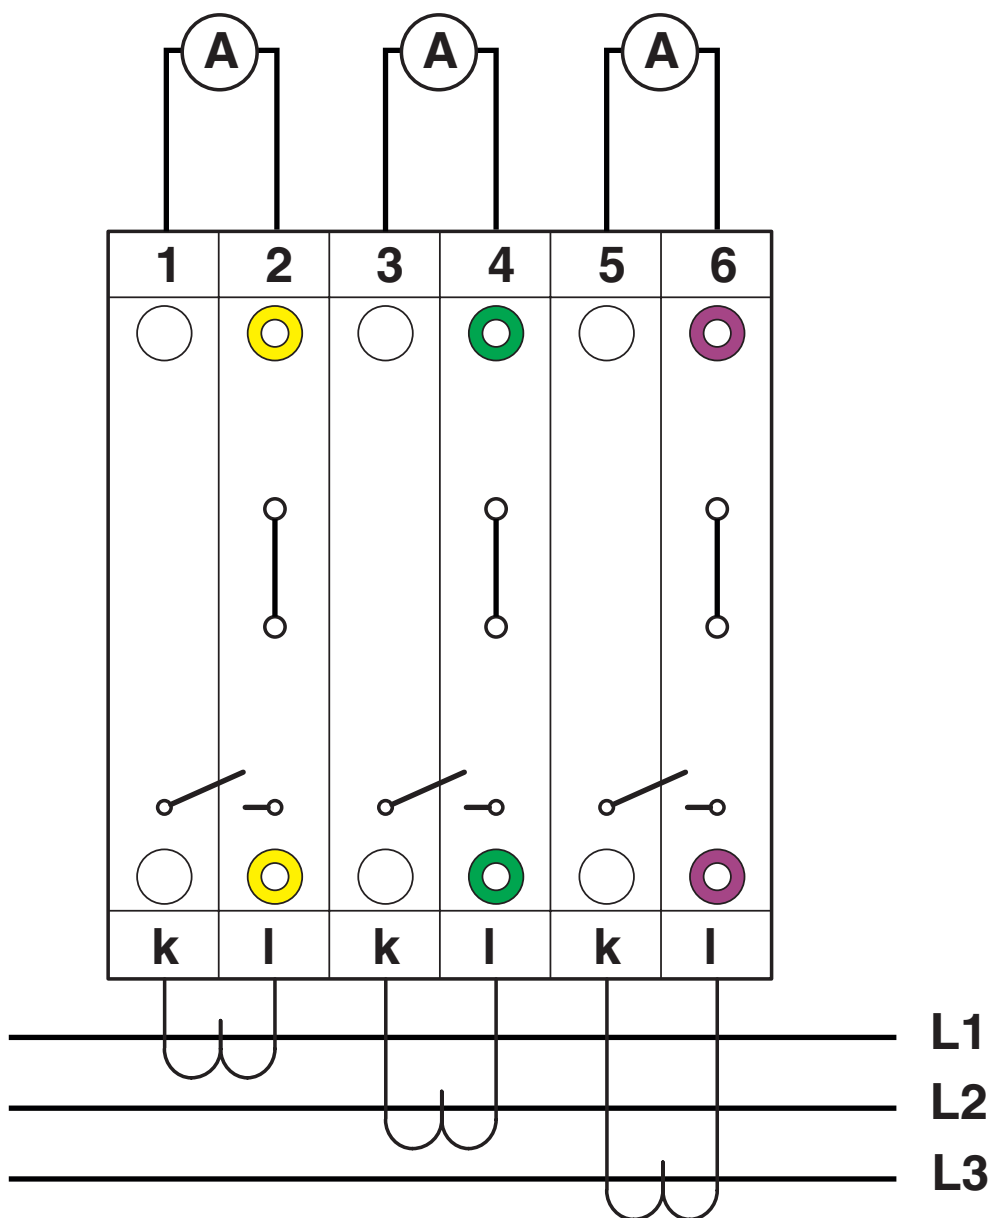


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Connection diagram

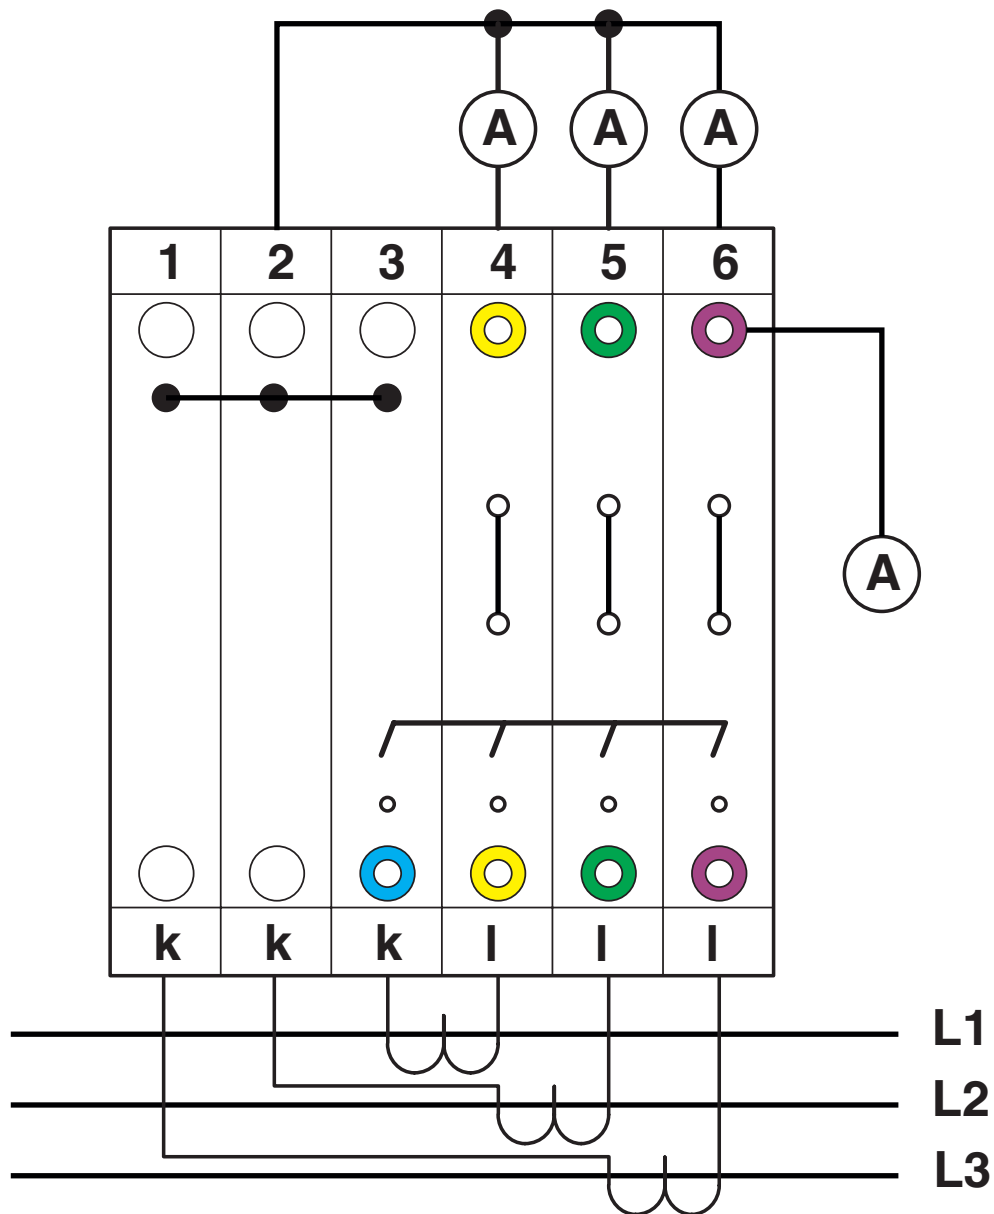

phase to phase


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Schematic diagram

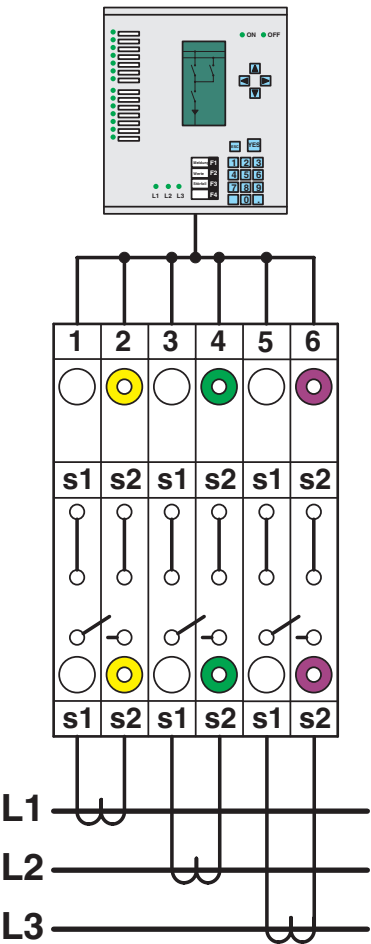

Simple three-phase current transformer set


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Connection diagram

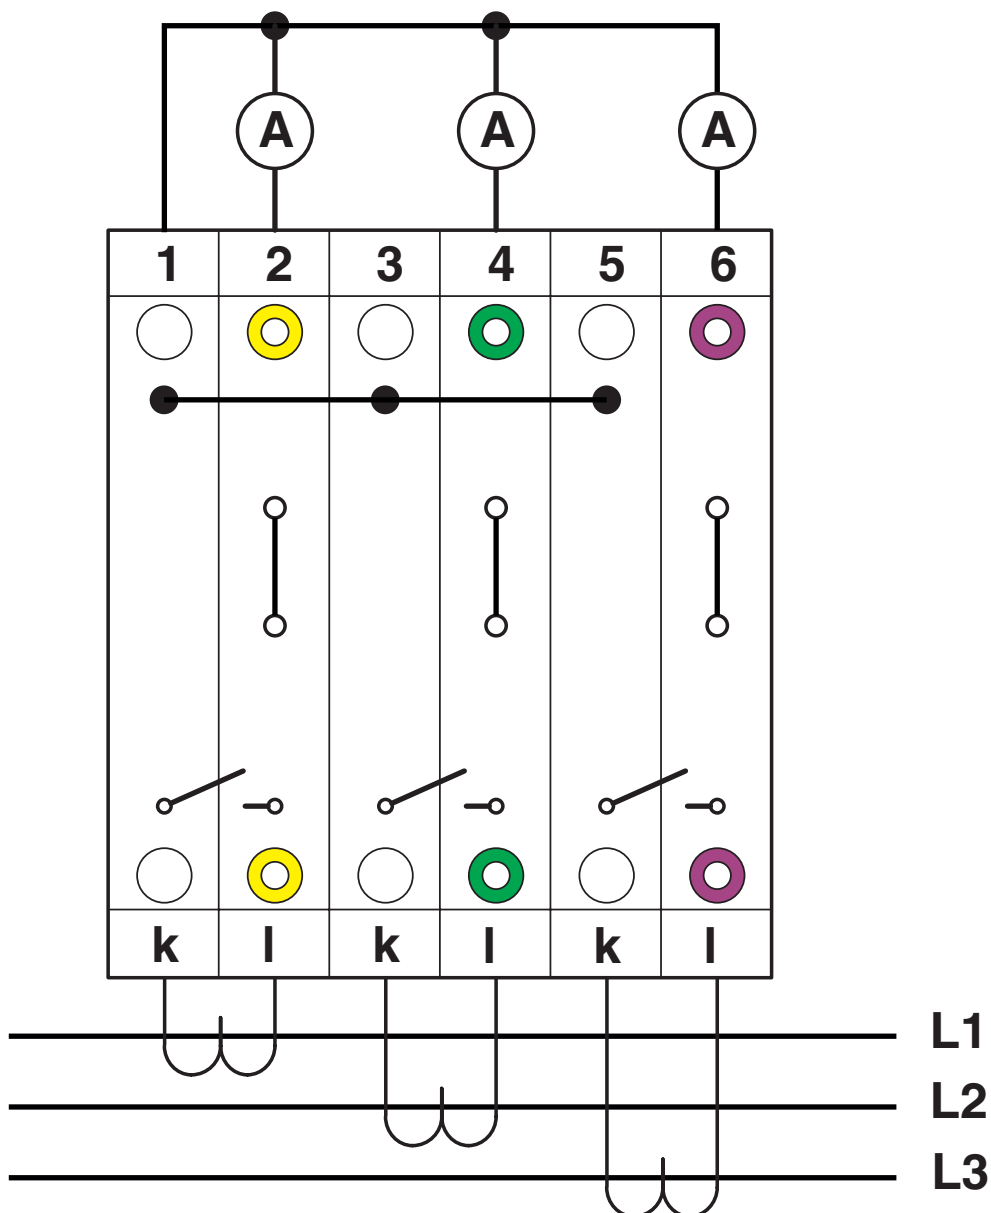


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Circuit diagram

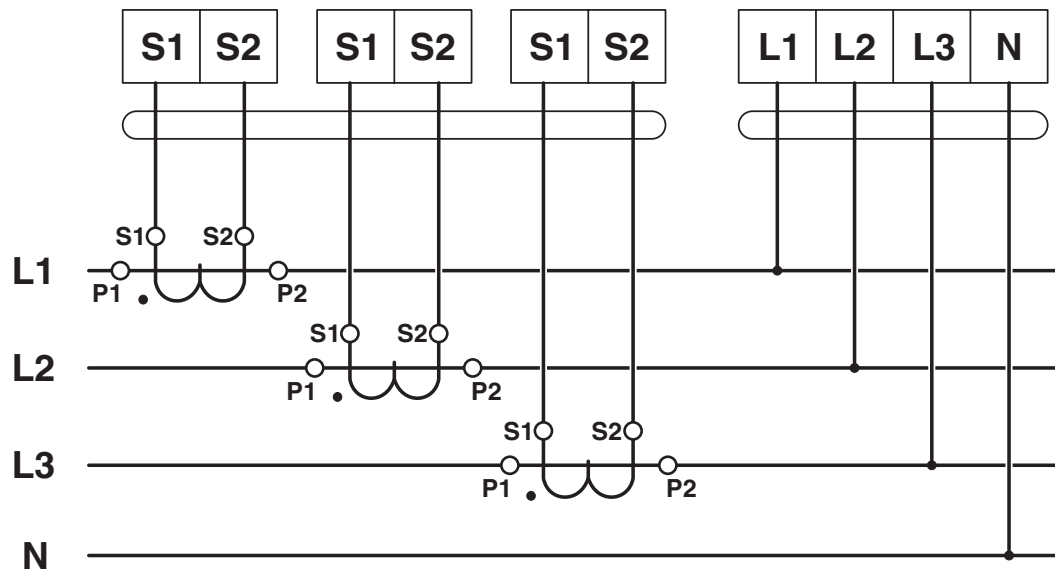


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Circuit diagram

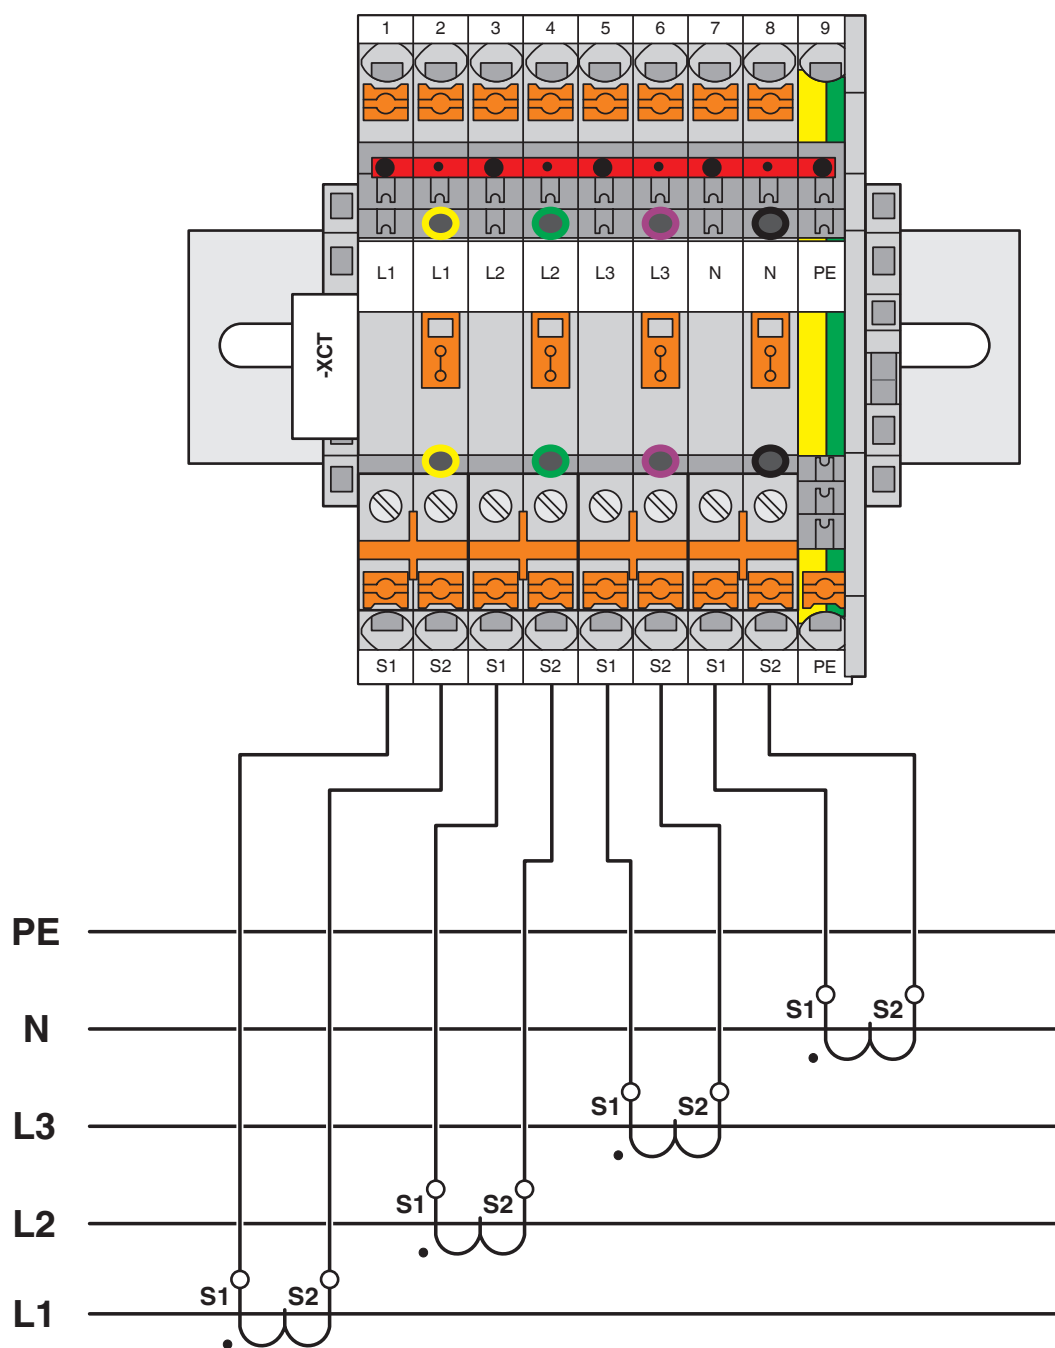


DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

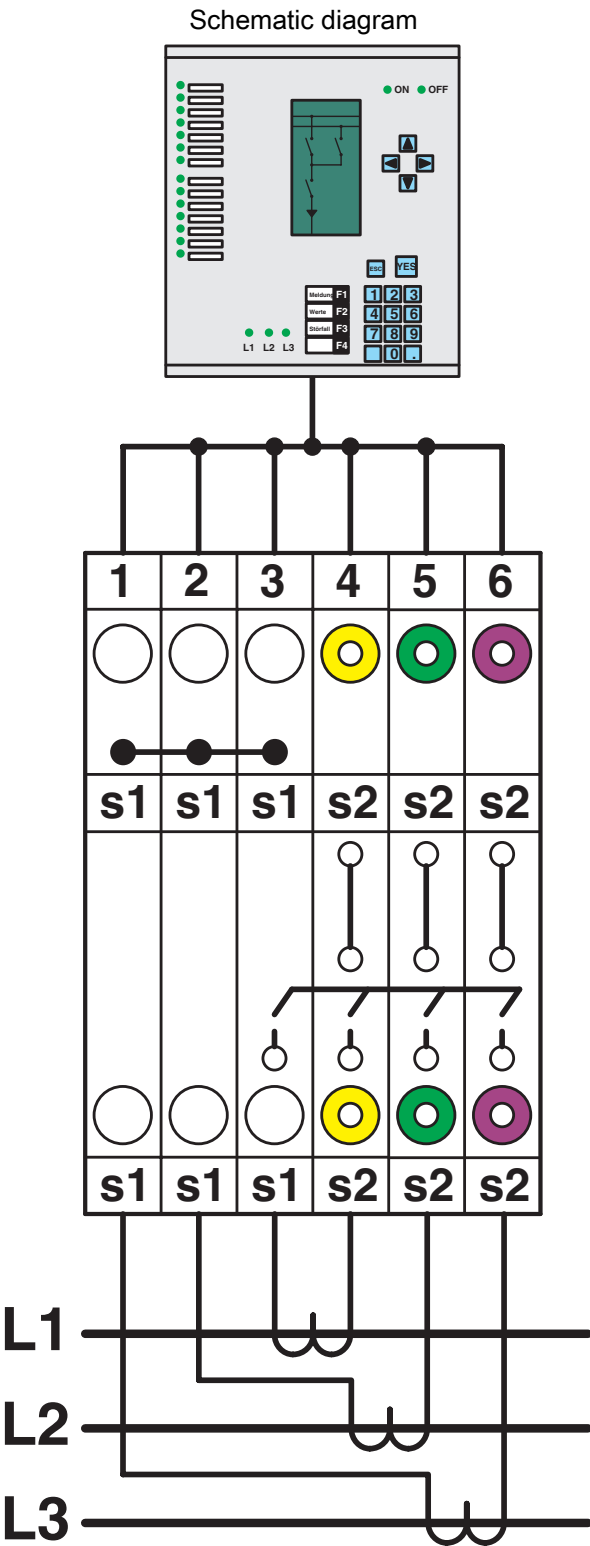

Interlinked three-phase current transformer set


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



Schematic diagram

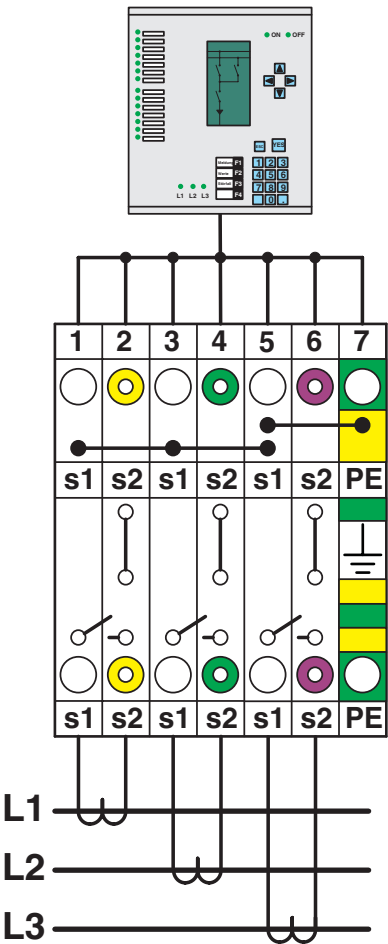

Interlinked three-phase current transformer set with grounded star point


DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>




Circuit diagram

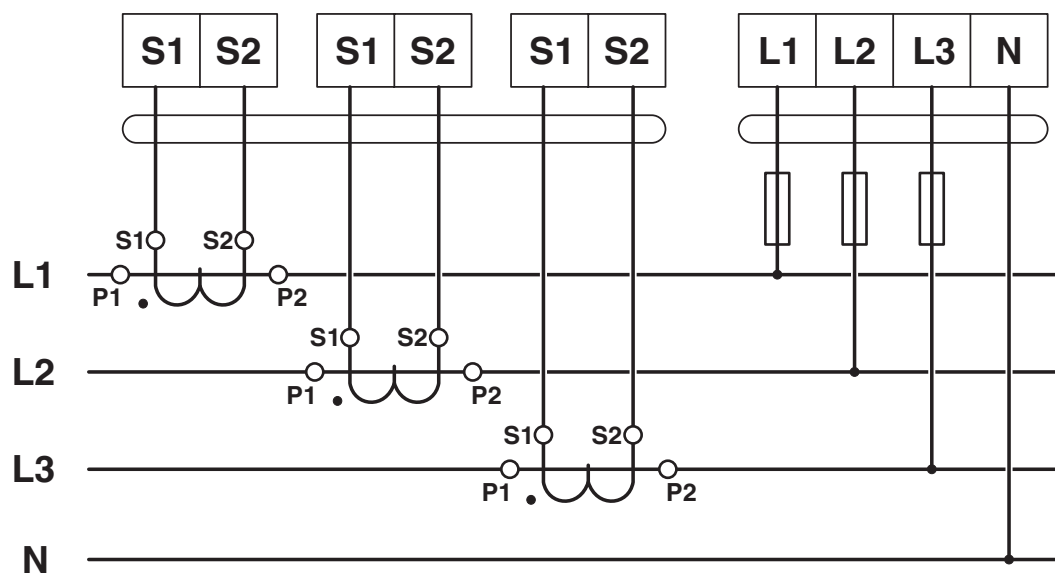

DTMED 6 - Feed-through terminal block



3034413
<https://www.phoenixcontact.com/pc/products/3034413>

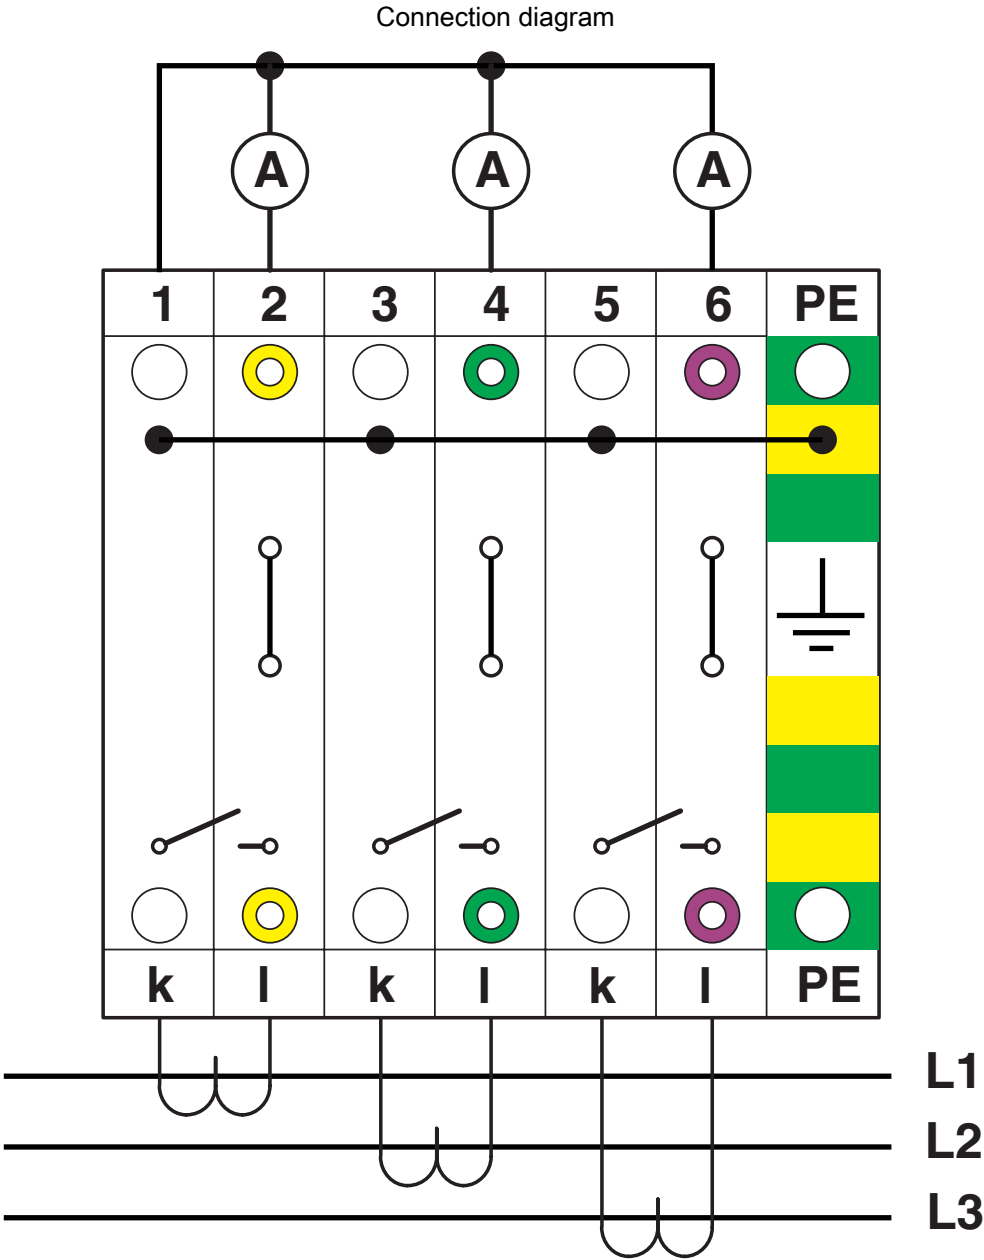

with PE terminals having the same contours

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 2-8 - Plug-in bridge

3030284

<https://www.phoenixcontact.com/pc/products/3030284>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 41 A

FBS 3-8 - Plug-in bridge

3030297

<https://www.phoenixcontact.com/pc/products/3030297>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 4-8 - Plug-in bridge

3030307

<https://www.phoenixcontact.com/pc/products/3030307>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 41 A

FBS 5-8 - Plug-in bridge

3030310

<https://www.phoenixcontact.com/pc/products/3030310>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 10-8 - Plug-in bridge

3030323

<https://www.phoenixcontact.com/pc/products/3030323>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 41 A

FBS 6-8 - Plug-in bridge

3032470

<https://www.phoenixcontact.com/pc/products/3032470>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 1/3-8 - Plug-in bridge

3032363

<https://www.phoenixcontact.com/pc/products/3032363>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, pin assignment: 1,3, color: red

 Max. current carrying capacity: 41 A

FBS 1/4-8 - Plug-in bridge

3032376

<https://www.phoenixcontact.com/pc/products/3032376>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, pin assignment: 1, 4, color: red

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 1/3/5-8 - Plug-in bridge

3032389

<https://www.phoenixcontact.com/pc/products/3032389>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, pin assignment: 1,3,5, color: red

 Max. current carrying capacity: 41 A

FBS 1/4/7/10-8 - Plug-in bridge

3032402

<https://www.phoenixcontact.com/pc/products/3032402>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, pin assignment: 1,4,7,10, color: red

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 1/5-8 - Plug-in bridge

3032381

<https://www.phoenixcontact.com/pc/products/3032381>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, pin assignment: 1,5, color: red

 Max. current carrying capacity: 41 A

FBS 2-8 CT - Plug-in bridge

3033830

<https://www.phoenixcontact.com/pc/products/3033830>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 3-8 CT - Plug-in bridge

3033831

<https://www.phoenixcontact.com/pc/products/3033831>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange

 Max. current carrying capacity: 41 A

FBS 4-8 CT - Plug-in bridge

3033832

<https://www.phoenixcontact.com/pc/products/3033832>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



FBS 10-8 CT - Plug-in bridge

3033833

<https://www.phoenixcontact.com/pc/products/3033833>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange

 Max. current carrying capacity: 41 A

FBS 2-8 BU - Plug-in bridge

3032567

<https://www.phoenixcontact.com/pc/products/3032567>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 3-8 BU - Plug-in bridge

3032570

<https://www.phoenixcontact.com/pc/products/3032570>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 41 A

FBS 4-8 BU - Plug-in bridge

3032583

<https://www.phoenixcontact.com/pc/products/3032583>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



FBS 5-8 BU - Plug-in bridge

3032596

<https://www.phoenixcontact.com/pc/products/3032596>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 41 A

FBS 6-8 BU - Plug-in bridge

3032677

<https://www.phoenixcontact.com/pc/products/3032677>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



FBS 10-8 BU - Plug-in bridge

3032606

<https://www.phoenixcontact.com/pc/products/3032606>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 41 A

FBS 2-8 GY - Plug-in bridge

3032621

<https://www.phoenixcontact.com/pc/products/3032621>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 3-8 GY - Plug-in bridge

3032622

<https://www.phoenixcontact.com/pc/products/3032622>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 41 A

FBS 4-8 GY - Plug-in bridge

3032635

<https://www.phoenixcontact.com/pc/products/3032635>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 5-8 GY - Plug-in bridge

3032648

<https://www.phoenixcontact.com/pc/products/3032648>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 41 A

FBS 6-8 GY - Plug-in bridge

3032664

<https://www.phoenixcontact.com/pc/products/3032664>



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: gray

 Max. current carrying capacity: 41 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBS 10-8 GY - Plug-in bridge

3032651

<https://www.phoenixcontact.com/pc/products/3032651>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: gray

 Max. current carrying capacity: 41 A

FBSRH 2-8 - Short-circuit connector

3033802

<https://www.phoenixcontact.com/pc/products/3033802>



Short-circuit connector, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



FBSRH 3-8 - Short-circuit connector

3033803

<https://www.phoenixcontact.com/pc/products/3033803>



Short-circuit connector, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

FBSRH 4-8 - Short-circuit connector

3033804

<https://www.phoenixcontact.com/pc/products/3033804>



Short-circuit connector, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBSR 2-8 - Plug-in bridge

3033808

<https://www.phoenixcontact.com/pc/products/3033808>



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 32 A

FBSR 3-8 - Plug-in bridge

3001597

<https://www.phoenixcontact.com/pc/products/3001597>



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBSR 4-8 - Plug-in bridge

3000585

<https://www.phoenixcontact.com/pc/products/3000585>



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

FBSR 5-8 - Plug-in bridge

3033809

<https://www.phoenixcontact.com/pc/products/3033809>



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBSR 10-8 - Plug-in bridge

3001599

<https://www.phoenixcontact.com/pc/products/3001599>



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

FBSR 16-8 - Plug-in bridge

3033816

<https://www.phoenixcontact.com/pc/products/3033816>



Plug-in bridge, pitch: 8.2 mm, number of positions: 16, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBSR 1/6/11/16-8 - Plug-in bridge

3033820

<https://www.phoenixcontact.com/pc/products/3033820>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, number of positions: 16, pin assignment: 1, 6, 11, 16, color: red

 Max. current carrying capacity: 32 A

FBSR 1/7/13/16-8 - Plug-in bridge

3033821

<https://www.phoenixcontact.com/pc/products/3033821>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, number of positions: 16, pin assignment: 1, 7, 13, 16, color: red

 Max. current carrying capacity: 32 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

FBSR 1/6/11/14-8 - Plug-in bridge

3033822

<https://www.phoenixcontact.com/pc/products/3033822>



Plug-in bridge, non-adjacent, pitch: 8.2 mm, number of positions: 16, pin assignment: 1, 6, 11, 14, color: red

 Max. current carrying capacity: 32 A

SB-ME 2-8 - Switching jumper

3034468

<https://www.phoenixcontact.com/pc/products/3034468>



Switching jumper, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 30 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

SB-ME 3-8 - Switching jumper

3032800

<https://www.phoenixcontact.com/pc/products/3032800>



Switching jumper, pitch: 8.2 mm, number of positions: 3, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 30 A

SB-ME 4-8 - Switching jumper

3034484

<https://www.phoenixcontact.com/pc/products/3034484>



Switching jumper, pitch: 8.2 mm, number of positions: 4, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 30 A

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

SB-MER 2-8 - Switching jumper

3000587

<https://www.phoenixcontact.com/pc/products/3000587>



Switching jumper, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 25 A

SB-MER 3-8 - Switching jumper

3000588

<https://www.phoenixcontact.com/pc/products/3000588>



Switching jumper, pitch: 8.2 mm, number of positions: 3, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 25 A

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



SB-MER 4-8 - Switching jumper

3000589

<https://www.phoenixcontact.com/pc/products/3000589>



Switching jumper, pitch: 8.2 mm, number of positions: 4, length: 25 mm, color: gray/orange

 Max. current carrying capacity: 25 A

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

D-DTME 6 - End cover

3034426

<https://www.phoenixcontact.com/pc/products/3034426>

End cover, depth: 49.6 mm, width: 2.2 mm, height: 99.8 mm, color: gray



CARRIER 35-8 - Partition plate

3034387

<https://www.phoenixcontact.com/pc/products/3034387>

Partition plate, With storage option for FBS...-8 and PAI 4-FIX, material: PA, color: gray



DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



SB-ME 2-8 - Switching jumper

3034468

<https://www.phoenixcontact.com/pc/products/3034468>




Switching jumper, pitch: 8.2 mm, number of positions: 2, length: 25 mm, color: gray/orange

AP-ME

METER - Cover profile

3034361

<https://www.phoenixcontact.com/pc/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

DTMED 6 - Feed-through terminal block




3034413

<https://www.phoenixcontact.com/pc/products/3034413>

APH-ME - Cover profile carrier

3034374

<https://www.phoenixcontact.com/pc/products/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option

APT-ME - Cover profile carrier

3034358

<https://www.phoenixcontact.com/pc/products/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



AH-ME - Covering hood

3240265

<https://www.phoenixcontact.com/pc/products/3240265>




Cover, for the contact- and dust-protected encapsulation of the components

TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/pc/products/3072821>



Separating plate, depth: 67.5 mm, width: 1 mm, height: 105.2 mm, color: gray

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/pc/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



PAI-4-FIX BU - Test adapter

3032729

<https://www.phoenixcontact.com/pc/products/3032729>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: blue

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



PAI-4-FIX OG - Test adapter

3034455

<https://www.phoenixcontact.com/pc/products/3034455>

4 mm test adapter, for terminal blocks with 8.2 mm pitch



PAI-4-FIX YE - Test adapter

3032745

<https://www.phoenixcontact.com/pc/products/3032745>

Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: yellow



DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

PAI-4-FIX RD - Test adapter

3032732

<https://www.phoenixcontact.com/pc/products/3032732>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: red

PAI-4-FIX GN - Test adapter

3032758

<https://www.phoenixcontact.com/pc/products/3032758>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: green

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

PAI-4-FIX BK - Test adapter

3032774

<https://www.phoenixcontact.com/pc/products/3032774>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: black

PAI-4-FIX GY - Test adapter

3032790

<https://www.phoenixcontact.com/pc/products/3032790>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: gray

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



PAI-4-FIX VT - Test adapter

3032761

<https://www.phoenixcontact.com/pc/products/3032761>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: violet

PAI-4-FIX BN - Test adapter

3032787

<https://www.phoenixcontact.com/pc/products/3032787>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: brown

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



PAI-4-FIX WH - Test adapter

3032797

<https://www.phoenixcontact.com/pc/products/3032797>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: white

PAIS-4-FIX GY - Test adapter

3032791

<https://www.phoenixcontact.com/pc/products/3032791>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: gray

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

PAIS-4-FIX BK - Test adapter

3032792

<https://www.phoenixcontact.com/pc/products/3032792>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: black

PAIS-4-FIX RD - Test adapter

3032793

<https://www.phoenixcontact.com/pc/products/3032793>



Test adapter, Do not plug in while the power is connected, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: red

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



PAIS-4-FIX BU - Test adapter

3032798

<https://www.phoenixcontact.com/pc/products/3032798>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: blue

PAIS-4-FIX YE - Test adapter

3032799

<https://www.phoenixcontact.com/pc/products/3032799>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: yellow

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

PAIS-4-FIX GN - Test adapter

3032801

<https://www.phoenixcontact.com/pc/products/3032801>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: green

PAIS-4-FIX VT - Test adapter

3032802

<https://www.phoenixcontact.com/pc/products/3032802>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, number of positions: 1, color: violet

DTMED 6 - Feed-through terminal block

3034413

<https://www.phoenixcontact.com/pc/products/3034413>



PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/pc/products/3030996>



Test plug, Modular test plug, number of positions: 1, color: red

PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/pc/products/3038736>



Test plug, number of positions: 1, color: red

DTMED 6 - Feed-through terminal block



3034413

<https://www.phoenixcontact.com/pc/products/3034413>

E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/pc/products/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com