


ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 800 V, nominal current: 32 A, number of connections: 2, connection method: Spring-cage connection, 1 level, Rated cross section: 4 mm², cross section: 0.08 mm² - 6 mm², mounting type: NS 35/7,5, NS 35/15, color: red

Your advantages

- As well as saving space, the compact design and front connection enable user-friendly wiring in a small amount of space
- The consistent double function shaft offers every opportunity for time-saving potential distribution and accommodating test accessories
- The large wiring space enables the use of conductors with ferrules and plastic collars within the nominal cross section

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3037151 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE02 |
| Product key | BE2111 |
| Catalog page | Page 205 (C-3-2013) |
| GTIN | 4017918599591 |
| Weight per piece (including packing) | 8.66 g |
| Weight per piece (excluding packing) | 8.644 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Technical data

Product properties

| | |
|-----------------------|-----------------------------|
| Product type | Feed-through terminal block |
| Area of application | Machine building |
| | Plant engineering |
| | Process industry |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 1.02 W |

Connection data

| | |
|---------------------------------|-------------------|
| Number of connections per level | 2 |
| Nominal cross section | 4 mm ² |

1 level

| | |
|---|---|
| Stripping length | 8 mm ... 10 mm |
| Internal cylindrical gage | A4 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.08 mm ² ... 6 mm ² |
| Cross section AWG | 28 ... 10 (converted acc. to IEC) |
| Conductor cross section flexible | 0.08 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 28 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 4 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1 mm ² |
| Nominal current | 32 A |
| Maximum load current | 40 A (with 6 mm ² conductor cross section) |
| Nominal voltage | 800 V |
| Nominal cross section | 4 mm ² |

Ex data

Rated data (ATEX/IECEx)

| | |
|-----------------------------|------------------------|
| Identification | ⊕ II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C |

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

| | |
|--|-------------------------------------|
| Ex-certified accessories | 3030420 D-ST 4 |
| | 3030721 ATP-ST 4 |
| | 1204517 SZF 1-0,6X3,5 |
| | 3022276 CLIPFIX 35-5 |
| | 3022218 CLIPFIX 35 |
| List of bridges | Plug-in bridge / FBS 2-6 / 3030336 |
| | Plug-in bridge / FBS 3-6 / 3030242 |
| | Plug-in bridge / FBS 4-6 / 3030255 |
| | Plug-in bridge / FBS 5-6 / 3030349 |
| | Plug-in bridge / FBS 10-6 / 3030271 |
| Plug-in bridge / FBS 20-6 / 3030365 | |
| Bridge data | 28 A / 4 mm ² |
| Ex temperature increase | 40 K (33.4 A / 4 mm ²) |
| Rated voltage | 550 V |
| for bridging with bridge | 550 V |
| - At bridging between non-adjacent terminal blocks | 352 V |
| - At bridging between non-adjacent terminal blocks via PE terminal block | 352 V |
| - At cut-to-length bridging with cover | 220 V |
| - At cut-to-length bridging with partition plate | 275 V |
| Rated insulation voltage | 500 V |
| output | (Permanent) |

Ex level General

| | |
|----------------------|---------|
| Rated current | 30 A |
| Maximum load current | 34.5 A |
| Contact resistance | 0.63 mΩ |

Ex connection data General

| | |
|------------------------------|--|
| Nominal cross section | 4 mm ² |
| Rated cross section AWG | 12 |
| Connection capacity rigid | 0.08 mm ² ... 6 mm ² |
| Connection capacity AWG | 28 ... 10 |
| Connection capacity flexible | 0.08 mm ² ... 4 mm ² |
| Connection capacity AWG | 28 ... 12 |

Dimensions

| | |
|--------------------|---------|
| Width | 6.2 mm |
| End cover width | 2.2 mm |
| Height | 56 mm |
| Depth on NS 35/7,5 | 36.5 mm |
| Depth on NS 35/15 | 44 mm |

Material specifications

| | |
|-------|-----|
| Color | red |
|-------|-----|

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

| | |
|--|--------|
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 125 °C |

Electrical tests

Surge voltage test

| | |
|-----------------------|-------------|
| Test voltage setpoint | 9.8 kV |
| Result | Test passed |

Temperature-rise test

| | |
|--|-------------------------------------|
| Requirement temperature-rise test | Increase in temperature \leq 45 K |
| Result | Test passed |
| | Test passed |
| Short-time withstand current 4 mm ² | 0.48 kA |
| Short-time withstand current 6 mm ² | 0.72 kA |
| Result | Test passed |

Power-frequency withstand voltage

| | |
|-----------------------|-------------|
| Test voltage setpoint | 2 kV |
| Result | Test passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Mechanical tests

Mechanical strength

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Attachment on the carrier

| | |
|-------------------------|-------------|
| DIN rail/fixing support | NS 32/NS 35 |
| Test force setpoint | 1 N |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|--------------------------------|-------------------------------|
| Rotation speed | 10 (+/- 2) rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 0.25 mm ² / 0.2 kg |
| | 4 mm ² / 0.9 kg |
| | 6 mm ² / 1.4 kg |
| Result | Test passed |

Environmental and real-life conditions

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Aging

| | |
|--------------------|-------------|
| Temperature cycles | 192 |
| Result | Test passed |

Needle-flame test

| | |
|------------------|-------------|
| Time of exposure | 30 s |
| Result | Test passed |

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 5g |
| Shock duration | 30 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C () |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |


ST 4 RD - Feed-through terminal block

3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Drawings

Diagram

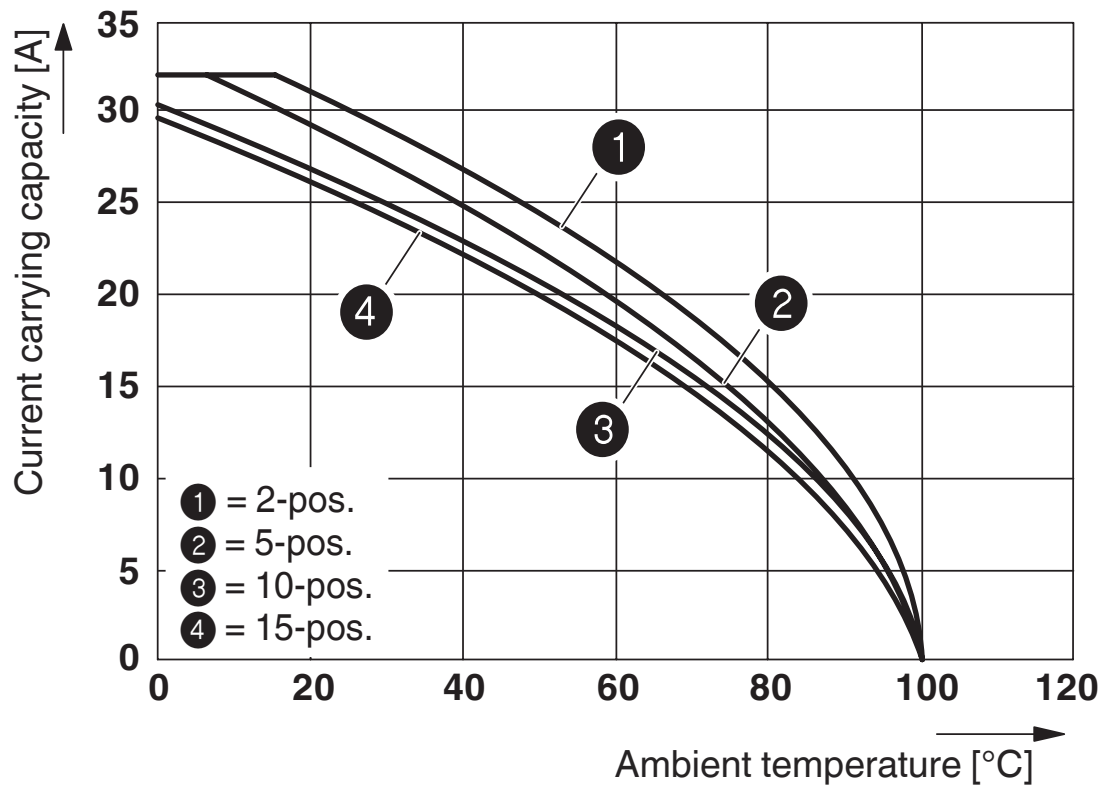

The figure shows the derating curve of the ST 4... terminal block in connection with the SP 4 plug


ST 4 RD - Feed-through terminal block

3037151

<https://www.phoenixcontact.com/ca/products/3037151>



Circuit diagram

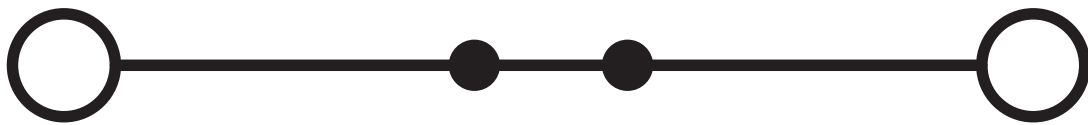

ST 4 RD - Feed-through terminal block





3037151


<https://www.phoenixcontact.com/ca/products/3037151>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/3037151>


|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 600 V | 30 A | 28 - 10 | - |
| Use group C | 600 V | 30 A | 28 - 10 | - |


|  IECEE CB Scheme Approval ID: DE1-63028_M1 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 800 V | 32 A | - | 0.2 - 4 |


|  LR Approval ID: LR2014888TA | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  KR Approval ID: HMB17372-EL002 | | | | |
|--|--|--|--|--|
|--|--|--|--|--|

|  NK Approval ID: 09 ME 140 | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  BV Approval ID: 13403/D0 BV | | | | |
|---|--|--|--|--|
|---|--|--|--|--|

|  VDE Zeichengenehmigung Approval ID: 40009034 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 800 V | 32 A | - | 0.2 - 4 |

|  cULus Recognized Approval ID: E60425 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 600 V | 30 A | 28 - 10 | - |
| Use group C | | | | |

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

| | | | | |
|--|-------|------|---------|---|
| | 600 V | 30 A | 28 - 10 | - |
|--|-------|------|---------|---|

DNV

Approval ID: TAE00001CS



ATEX

Approval ID: KEMA00ATEX2129U



EAC Ex

Approval ID: RU C-DE.HA91.B.00066



IECEX

Approval ID: IECEX KEM 06.0050U



CCC

Approval ID: 2020322313000621



UKCA-EX

Approval ID: DEKRA 21UKEX0301U

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141120 |
| ECLASS-13.0 | 27250101 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

ST 4 RD - Feed-through terminal block



3037151

<https://www.phoenixcontact.com/ca/products/3037151>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
8240 Parkhill Drive
Milton, Ontario L9T 5V7
1-800-890-2820
cdinfo@phoenixcontact.ca